

JZ3-S-6.3 x L range

A2 Stainless steel self-tapper for fixing timber, steel plates or aluminium back to steel or aluminium sections.

Application Features

- For steel sections from 2.0mm in thickness
- For aluminium sections from 3.0mm in thickness

Material Specification

- High quality stainless steel grade A2 to ISO 3506, EN 1.4301 to ISO 10088, AISI 304



Performance Details

Ultimate Fastener Tensile Strength

Fastener Diameter	kN
6.3 x L	15.70

Ultimate Fastener Shear Strength


Fastener Diameter	kN
6.3 x L	10.20

Ultimate Pullout Load kN

Fastener Diameter	Steel Thickness (mm)					
	2.50	3.00	4.00	5.00	6.00	7.00+
Pilot Hole (mm)	5.30	5.30	5.30	5.30	5.50	5.70
Pullout Load (kN)	7.70	9.60	12.60	15.70*	15.70*	15.70*

*Mode of failure for ultimate pullout from 5-6mm thickness plus steel is limited by the ultimate tensile strength of the fastener.

Figures based on tests from construction grade steel up to 3.0mm thick designated as S350GD (BS EN 10346), minimum yield strength 350 N/mm². Steel 4.0mm and thicker designated as grade S275 (BS EN 10025), minimum yield strength 275 N/mm².

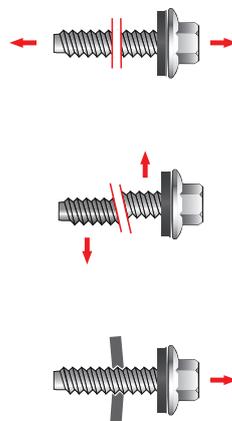

Drive Tool



Self-tapping fastener range

Figures shown on this data sheet are based on results obtained from tests carried out in EJOT UK's Applitec laboratory in accordance with equipment conforming to current industry standards, on a random sample of fasteners manufactured to EJOT tolerances. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.