COMPRESSOR HOSE ASSEMBLY

GPA Series











This professional compressor hose assembly, with heavy duty safety claw clamps, is the cost-effective, high-performance TPE alternative to rubber hosing. While looking and feeling like rubber, it has many advantages including a longer lifespan. Manufactured from a hard wearing PVC Nitrile blend, this ergonomicallyfriendly super-flexible product is a real winner in many industrial environments.

Key Features:


- Professional 15m air compressor assembly including safety claw clamps.
- Every coil is pressure tested off the line.
- PVC Nitrile blend gives good abrasion and ageing resistance superior to rubber.
- Clean, flexible and user-friendly.
- Reduced plasticizer migration.
- Excellent resistance to UV / Ozone.
- Silicone and Cadmium free.
- Service Temperature 15°C to + 60°C.
- 3:1 safety factor.
- Every hose is fully tested to 20 Bar during manufacture.

Sizes:

Available in 15m coils Other sizes available upon request

Colours:

Yellow

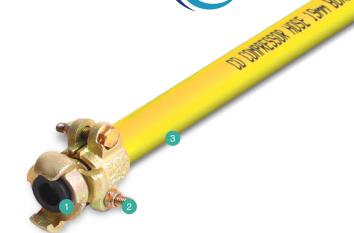

- 1. Double lock quick release coupling (DLQR)
- 2. Safety clamp with locknut fitted for additional safety
- 3. High strength PVC reinforced hose



Applications:

- Compressed air tools
- Spray guns
- Road breakers
- General industrial oil, grease solvents, air and water applications













						DIN
Product Ref	Internal Diameter	External Diameter	Wall Thickness	Maximum Working Pressure	Minimum Burst Pressure	Bend Radius (Approx.)
GPA19	19mm	29mm	10mm	20 Bar	60 Bar	170mm