

Window Protection Film



Product Code: 20400372 & 20400523

Product Code	Roll Size	Colour
20400372	600mm x 100m	Blue
20400523	600mm x 100m	Clear

Product Overview


Window Protection Film is a polyethylene film coated with acrylic pressure sensitive adhesive specially designed for windows and glass.

Application

Ideal for use on windows, glass doors, and mirrors. Suitable for commercial and residential construction environments where temporary surface protection is required.

Technical Performance

Technical Performance	Data
Tape Thickness (um-microns)	35 (+/- 0.035)
Tape Density (g/cm ³)	0.925
Tape width (mm)	600
Tape length (m)	100
Tape length variance (m)	+/- 0.5
Tensile strength (mpa) / Elongation Breaking Point (%) - Vertical	> 20 / > 300
Tensile strength (mpa) / Elongation Breaking Point (%) - Horizontal	> 15 / > 500
Adhesion to Glass/Stainless Steel (N/25mm)	1.2N +/- 10%
Storage (OC)	25 +/- 10%
Relative Humidity (%)	60 +/- 10%
Static Shear @ 230C (Hours)	> 48
Maximum recommended application period (Indoors)	12 months
Maximum recommended application period (Outdoors)	6 months

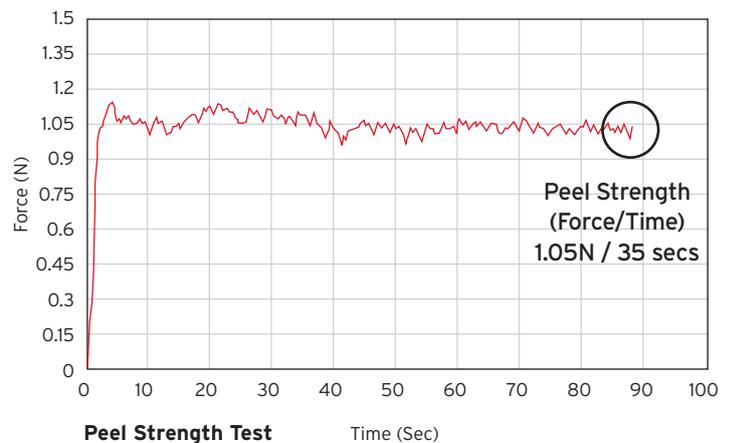

All product specifications and data are subject to change without notice. The data contained in this product sheet is believed to be accurate and is reproduced in good faith. It is the customer's responsibility to ensure that the product described in this datasheet is suitable for their application. Sinops disclaim any and all liability for any errors, inaccuracies or incompleteness contained in the product sheet. In addition Sinops makes no warranty, representation or guarantee regarding the suitability of the product described by the datasheet for any particular or associated purchase.

VJ Technology Limited

Technology House, Brunswick Road, Cobbs Wood Industrial Estate, Ashford, Kent TN23 1EN

Tel 01233 637695 | Email enquiries@vjtechnology.com

www.vjtechnology.com