


GRIPPS®

ANSI/ISEA
121-2018
COMPLIANT

H03048 LITTLE GRIPPER KIT


Moulded from a specialised TPU material, the GRIPPS® Little Gripper provides an instant load-rated tool connection point without the need for adhesives

Compatible with round and polygonal-shaped shafts, the 4 sizes cover a massive range of tools including screwdrivers, punches and more.


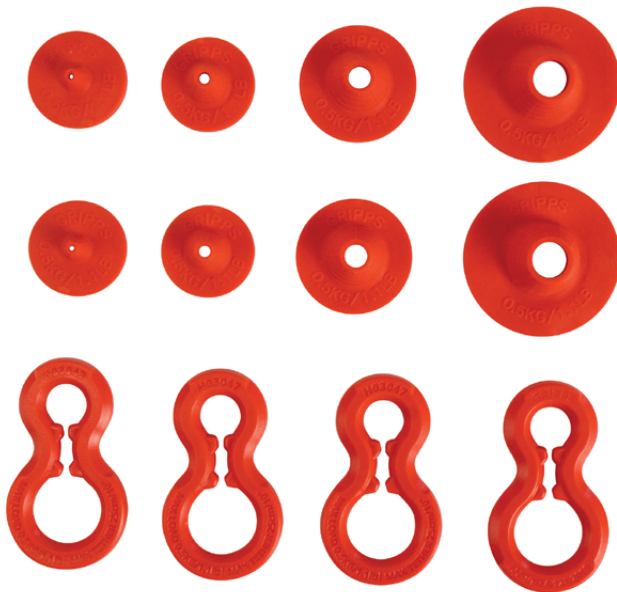


0.5 KG **1.1** LB

MAX LOAD:

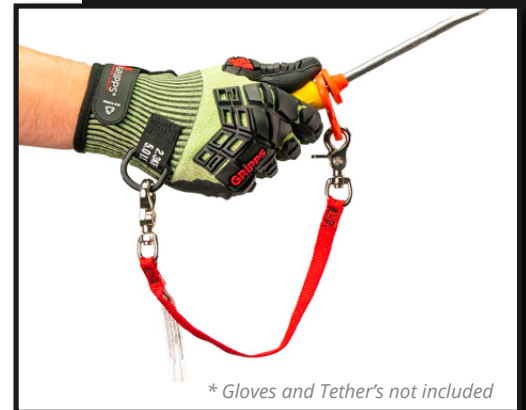

* Gloves and Tether's not included

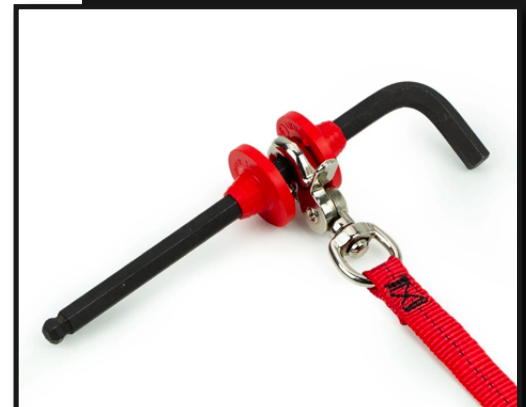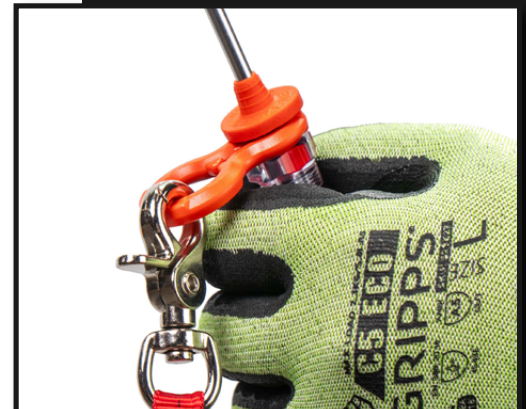


ENGINEERED FOR DROP PREVENTION

gripps.com

KEY FEATURES

Compatible with tool shafts of all shapes & thicknesses

UV protected for long-lasting outdoor use

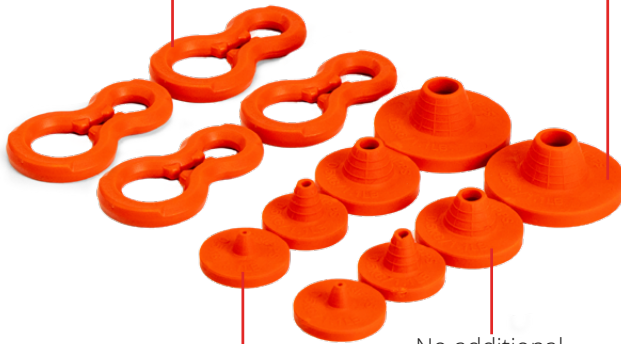


Moulded from custom German-engineered TPU compounds

No additional adhesives or tools required for application

SPECIFICATIONS

NAME	MAX TETHER LENGTH	MAX LOAD	QUANTITY	TOOL SHAFT DIAMETER
Little Gripper 1			2	3.5 mm - 6 mm 0.1 in - 0.2 in
Little Gripper 2			2	5.5 mm - 9 mm 0.2 in - 0.3 in
Little Gripper 3	1.3 m 51 in	0.5 kg 1.1 lb	2	8 mm - 13 mm 0.3 in - 0.5 in
Little Gripper 4			2	12 mm - 16 mm 0.5 in - 0.6 in
GripLink			4	10 mm - 17 mm 0.3 in - 0.6 in


1



Apply little gripper to tool using appropriate size.


Size 1 = 3.5 mm - 6.0 mm | 0.1" - 0.2"
 Size 2 = 5.5 mm - 9.0 mm | 0.2" - 0.3"
 Size 3 = 8.0 mm - 13 mm | 0.3" - 0.5"
 Size 4 = 12.0 mm - 16 mm | 0.5" - 0.6"

2




Apply the GRIPPLink to the tool shaft. Where possible, insert tool through the smallest end of GripLink.

3

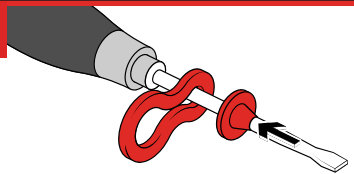


Apply the Little Gripper to your tool, ensuring a snug fit.

4



Two Little Grippers may be used without a GripLink when using GRIPPS H01067 tether.

5

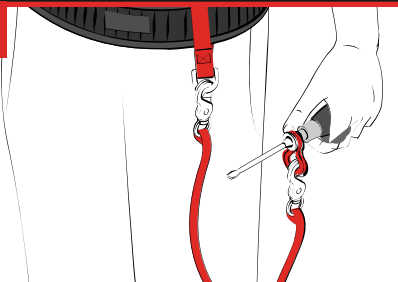

Connect a tether up to 25cm in length to the GripLink.

@GRIPPSGLOBAL



#ConquerGravity