

GRIPPS®

ANSI/ISEA
121-2023
COMPLIANT

H01058 DUAL ARM TOOL-HITCH 32KG/71LB

32_{KG}

71_{LB}

MAX LOAD:

The GRIPPS® Dual-Arm Tool Hitch loops through itself to create a simple yet strong choke and is suitable for heavy tools weighing up to 32kg / 71lb, such as crowbars and sledgehammers.

The GRIPPS® Dual-Arm Tool Hitch loops through itself to create a simple yet strong choke.

The tool is then tethered directly to a load-rated anchor point via the heavy-duty tool ring on the tail.



ENGINEERED FOR DROP PREVENTION


gripps.com

KEY FEATURES

Creates a load-rated tool connection point for heavy 'open' tools.

Tactical grade Nylon for maximum strength.


Heavy-duty closed metal D-Ring

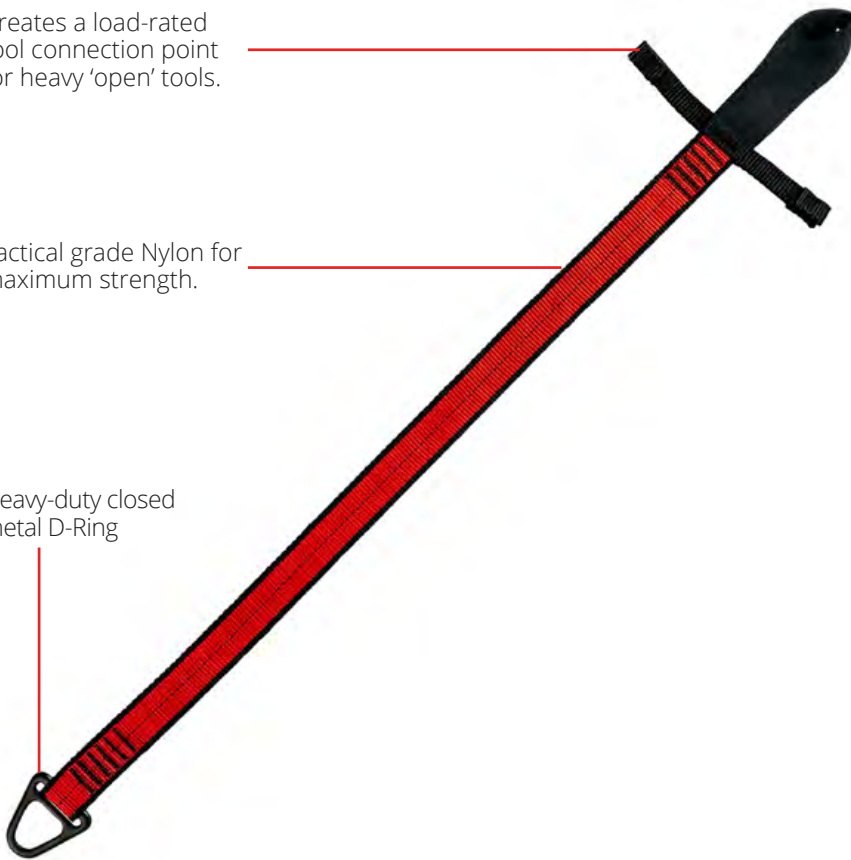

SPECIFICATIONS


SKU	MAX LOAD	LENGTH	MAX TETHER LENGTH
H01058	32 kg 71 lb	67 cm 26.4 in	1.8 m 71 in

1




Lay out Tool-Hitch flat on ground or a table.

2




Pass one end of the Tool-Hitch around the neck (near the tool's center of gravity). Then pass the D-Ring end back through the Tool Hitch loop to create a choke-hold.

3




Apply GRIPPS® V-Gripp Tape to straps/wings of the Tool-Hitch. Wrap around 10x times on either side.

4



Test tape effectiveness and pull on Tool-Hitch to test strength.

5

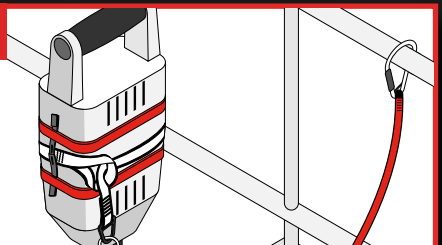

Your Tool-Hitch is ready to tether to a suitable anchor point using an appropriate Tool Tether.