

0370 - Sleeve Anchor

Description

The Sleeve Anchor is a torque controlled expansion anchor. It is a through fixing, which means the hole can be drilled through the part to be fixed, ensuring a quick and easy installation. It is designed to be used in a wide variety of base materials, particularly brickwork and blockwork, as well as concrete.

Advantages

- Through fixing
- Load assisted
- Torque controlled
- Fast installation
- Variety of head styles
- Integral nut and washer

Typical applications

- Timber wall plates
- Signs
- Handrails
- Porches
- Pipework brackets
- Boiler support brackets




Sleeve Anchor

Hex Nut Zinc Plated

VJT Code	Description	Thread Ø	Drill-Ø (mm)	Max. Fixture Thickness (mm)	Embed Depth (mm)	Min. Drill Depth	Overall Length	Box Qty
03700005	Sleeve Anchor Hex Nut Bzp 6/5/25	M4.5	6	5	20	30	30	100
03700010	Sleeve Anchor Hex Nut 6/5/26	M4.5	6	5	25	35	26	100
03700020	Sleeve Anchor Hex Nut 6/8/40	M4.5	6	8	35	45	40	100
03700030	Sleeve Anchor Hex Nut 6/28/60	M4.5	6	28	35	45	60	100
03700040	Sleeve Anchor Hex Nut 8/8/40	M6	8	8	40	50	40	100
03700050	Sleeve Anchor Hex Nut 8/30/65	M6	8	30	40	50	65	50
03700060	Sleeve Anchor Hex Nut 8/55/90	M6	8	55	40	50	90	50
03700070	Sleeve Anchor Hex Nut 10/6/40	M8	10	6	45	57	40	50
03700080	Sleeve Anchor Hex Nut 10/10/50	M8	10	10	45	57	50	50
03700090	Sleeve Anchor Hex Nut 10/35/75	M8	10	35	45	57	75	50
03700100	Sleeve Anchor Hex Nut 10/60/100	M8	10	60	45	57	100	25
03700110	Sleeve Anchor Hex Nut 10/85/125	M8	10	85	45	57	125	25
03700120	Sleeve Anchor Hex Nut 12/15/60	M10	12	15	55	75	60	25
03700130	Sleeve Anchor Hex Nut 12/20/70	M10	12	20	55	75	75	25
03700140	Sleeve Anchor Hex Nut 12/50/100	M10	12	50	55	75	100	20
03700150	Sleeve Anchor Hex Nut 12/75/125	M10	12	75	55	75	125	20
03700160	Sleeve Anchor Hex Nut 16/15/65	M12	16	15	60	95	65	20
03700170	Sleeve Anchor Hex Nut 16/55/110	M12	16	55	60	95	110	10
03700180	Sleeve Anchor Hex Nut 16/85/145	M12	16	85	60	95	145	10
03700190	Sleeve Anchor Hex Nut 20/20/80	M16	20	20	65	115	80	10
03700200	Sleeve Anchor Hex Nut 20/55/115	M16	20	55	65	115	115	5
03700210	Sleeve Anchor Hex Nut 20/100/160	M16	20	100	65	115	160	5

Installation Procedure

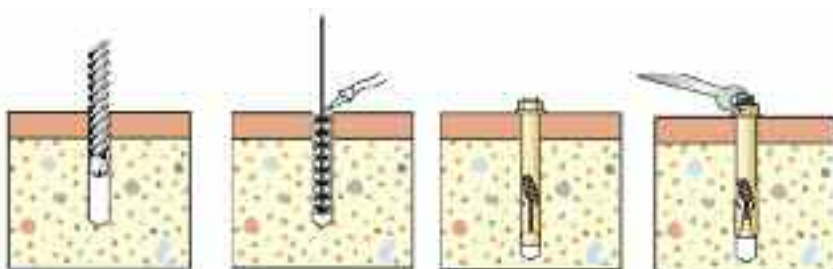

1. Drill correct diameter hole to recommended depth.
2. Remove debris and clean hole thoroughly.
3. Insert anchor through fixture into hole and tap home.
4. Tighten to the recommended torque.