

0190 - Soft Insulation Anchors

Description

A range of insulation anchors for fixing internal & external insulation materials to solid base materials, satisfying a wide range of applications. Manufactured from high quality polypropylene for outstanding performance, durability and longevity.




Advantages

- Through fixing
- One piece or pre-assembled
- Hammerset (Quick & simple installation)
- Large diameter head
- Profiled head gives good key for render
- Corrosion proof

Typical applications

Fixing of internal & external soft insulation materials such as Rockwool and polystyrene.

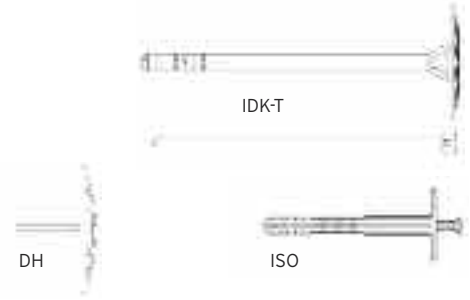

Soft Insulation Anchor

VJT Code	Description	Drill-Ø (mm)	Max. Fixture Thickness (mm)	Min. Embed Depth (mm)	Min. Drill Depth (mm)	Overall Length (mm)	Box Qty
01900010	8 x 60 - 30/40 Soft (DHT)	8	30 - 40	20	40	60	350
01900020	8 x 80 - 50/60 Soft (DHT)	8	50 - 60	20	40	80	300
01900030	8 x 100 - 70/80 Soft (DHT)	8	70 - 80	20	40	100	250
01900040	8 x 120 - 90/100 Soft (DHT)	8	90 - 100	20	40	120	250
01900050	8 x 140 - 110/120 Soft (DHT)	8	110 - 120	20	40	140	200
01900060	8 x 160 - 130/140 Soft (DHT)	8	130 - 140	20	40	160	150
01900076	IDK-T 8/60 x 75 with Pin	8	40	35	45	75	200
01900077	IDK-T 8/60 x 95 with Pin	8	60	35	45	95	200
01900078	IDK-T 8/60 x 115 with Pin	8	80	35	45	115	200
01900080	IDK-T 8/60 x 135 with Pin	8	100	35	45	135	200
01900090	IDK-T 8/60 x 155 with Pin	8	120	35	45	155	200
01900100	IDK-T 8/60 x 175 with Pin	8	140	35	45	175	200
01900190	TID-T 8/60 x 195 with Pin	8	160	35	45	195	100
01900200	TID-T 8/60 x 215 with Pin	8	180	35	45	215	100
01900210	TID-T 8/60 x 235 with Pin	8	200	35	45	235	100
01900220	TID-T 8/60 x 255 with Pin	8	220	35	45	255	100
01900230	TID-T 8/60 x 275 with Pin	8	240	35	45	275	100
01900240	TID-T 8/60 x 295 with Pin	8	260	35	45	295	100
01900120	ITW ISO 10/60/90	10	60	30	50	90	200
01900130	ITW ISO 10/80/110	10	80	30	50	110	200
01900140	ITW ISO 10/100/130	10	100	30	50	130	200
01900150	ITW ISO 10/120/150	10	120	30	50	150	200
01900155	ITW ISO 10/185/215	10	185	30	50	215	200

Installation Procedure

-  Drill hole to correct diameter and the recommended depth.
-  Push the anchor into the drilled hole and tap home until flush with the insulation.
-  Insert the expansion pin and hammer home.
-  Full expansion is achieved when pin is flush with anchor head.

Insulation Washer

VJT Code	Description	Washer Diameter (mm)	Length (mm)	Pack Qty
01900008	IT/S 5/60	60	-	100
01900170	IT/Z 8/60	60	-	100
01900180	SBH-T 65/25	65	-	100
01900400	DH 90	90	-	300
01900410	60mm Shaft for DH90	-	60	350
01900420	120mm Shaft for DH90	-	120	250
01900430	160mm Shaft for DH90	-	160	150

