

Tapfix

The CFT comprehensive range of carbon self drilling screws.

Both the 'A.B' point and 'B' types of these self tapping screws have been

manufactured from the highest quality case hardened carbon steel and S.Steel. The A.B S.Steel thread type provided very high pull out values when

used for fixing into light steel (up to 5mm thick) and also all timber applications. The 'B' thread offers all these benefits but is only used for fixings into Hot

Rolled Steel over 5.5 thick and up to 12mm. AB and B type thread must penetrate a minimum of 5mm through material they are fixing into with a minimum of 40mm

penetration of the AB point into timber.

AB points can also be used for repairing misplaced fixings in sheet of sheet or rail/purlin applications.

APPLICATIONS

Fixing a variety of materials into pre drilled holes. Excellent pullout achieved in timber.

HEAD STYLES

Hex 5/16" AF.


BENEFITS

Suitable for all cladding applications and general construction. Ideal for use as a repair screw.

SPECIFICATIONS

Manufactured from Carbon steel heat treated and zinc plated to 12 microns. Stainless steel and aluminium also available with Bi-hex integral nylon heads.


140 ABCSST 120 ABCSST 100 ABCSST 90 ABCSST 75 ABCSST 65 ABCSST 50 ABCSST 40 ABCSST 30 ABCSST 25 ABCSST 20 ABCSST

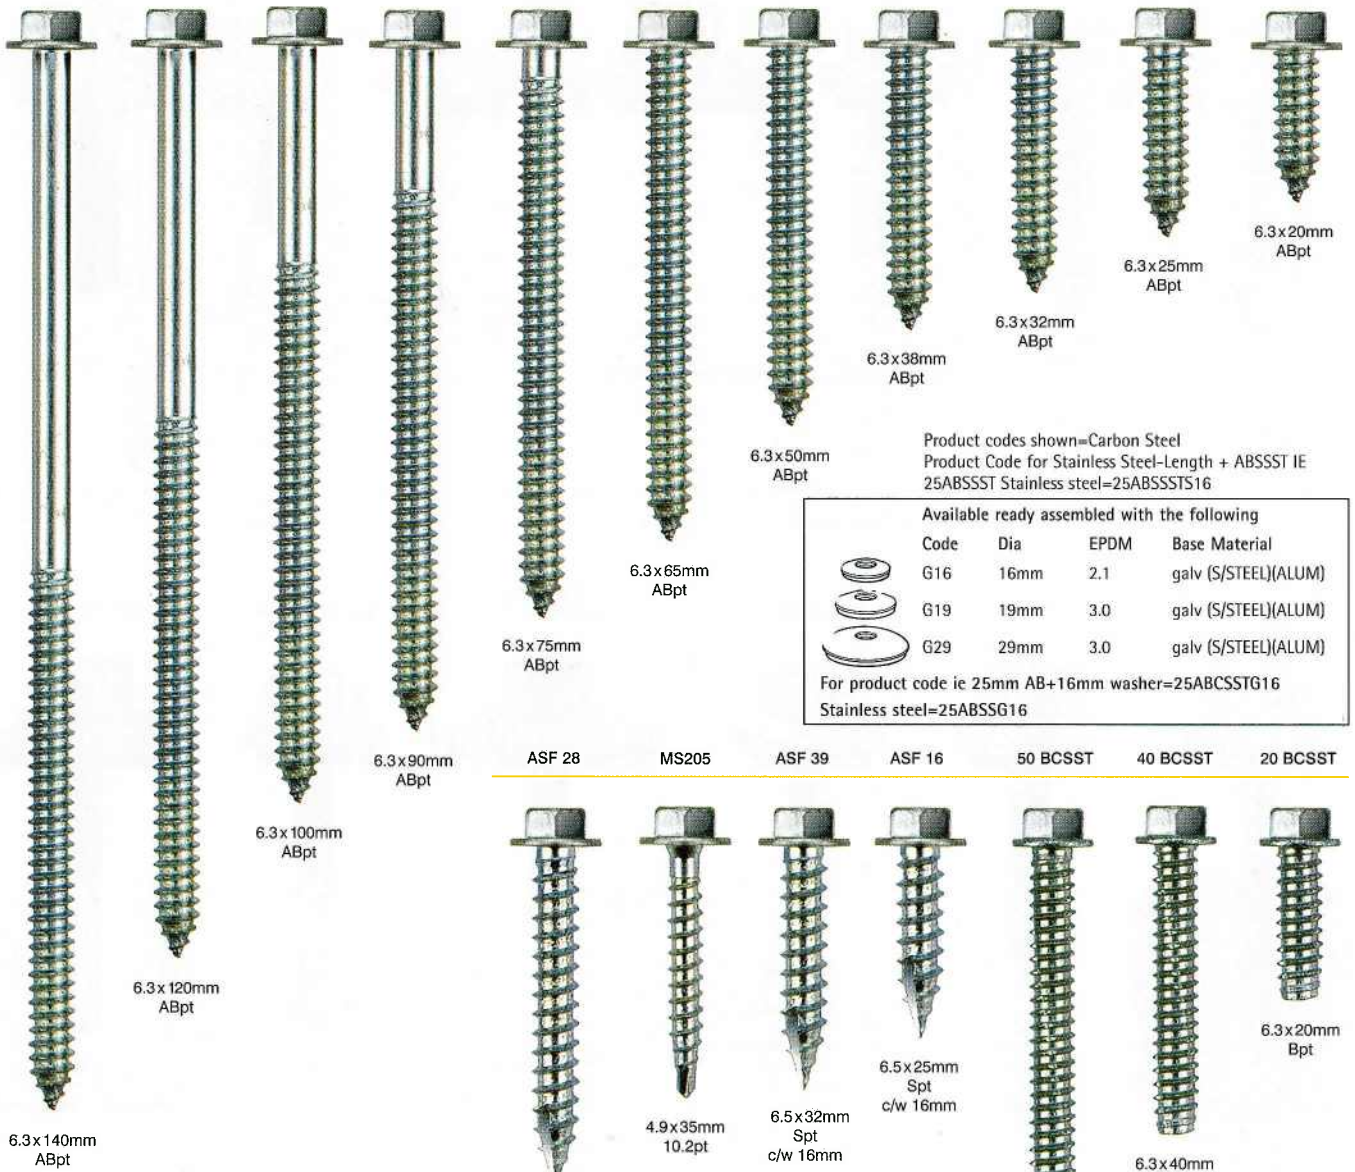

Product codes shown=Carbon Steel
 Product Code for Stainless Steel=Length + ABSST IE
 25ABSST Stainless steel=25ABSSTS16

Available ready assembled with the following			
Code	Dia	EPDM	Base Material
G16	16mm	2.1	galv (S/STEEL)(ALUM)
G19	19mm	3.0	galv (S/STEEL)(ALUM)
G29	29mm	3.0	galv (S/STEEL)(ALUM)

For product code ie 25mm AB+16mm washer=25ABCSTG16
 Stainless steel=25ABSSG16

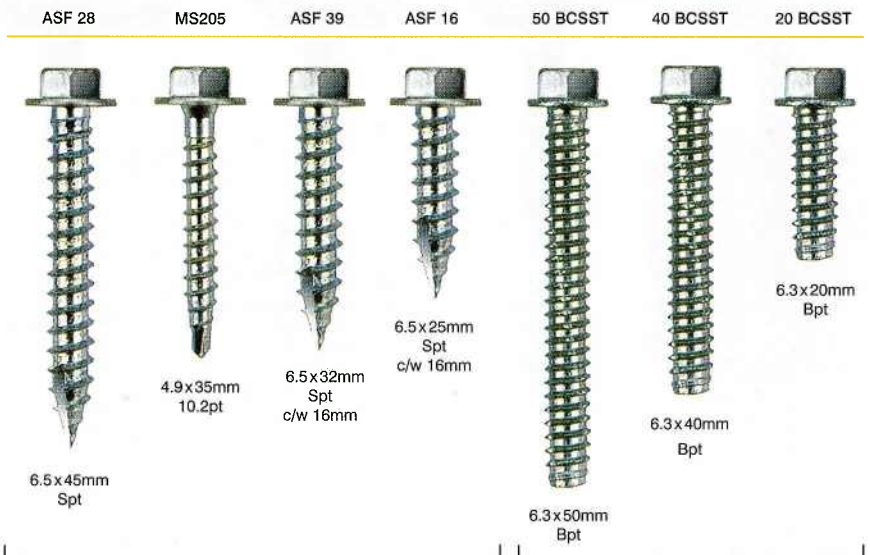

Recommended for sheet to timber applications
 Also in stock, 6.5x50mm, 6.5x75mm, 6.5x100mm

other sizes in stock up to 260mm max

Standard Stock lengths also include 160mm, 180mm, 200mm in both Carbon Steel and Stainless Steel. Thread length remains as 140ABCST for longer lengths.