

NAIL AND GAS FEATURES & BENEFITS



Paslode Nailing System

Nails, fuel cells and tools are developed, manufactured and tested in Europe every day, providing optimum performance, the highest levels of safety and local technical support



CE & EC5 range (Eurocode 5)

Paslode nails meet or exceed corrosion requirements stated in Eurocode 5 (EC5), thus suitable for all applications in service class 1, 2 and 3



Premium Fixing with RounDrive® Nails

A unique FULL HEAD design for 34° paper strip collation which offers optimum performance and the best quality finish available



Best Driveability Coating

Developed for different types of wood, the Paslode coating offers increased drivability over its competitors



Greener, cleaner gas

Our intelligent fuel injection system delivers the exact dosage required in all UK temperatures, and best performance, minimising waste

IM360Ci NAIL FUEL PACKS



STAINLESS STEEL NAILS
Outdoor, exposed to weather. Service Class 3.



Code	Ø (mm)	Length (mm)	Shank	ST/ST	Fuel Cells	Box Qty
142045	2.8	51	Ring	A2	1	1,250
142047	2.8	63	Ring	A2	1	1,250
142055	2.8	63	Ring	A4	1	1,250
142050	3.1	80	Ring	A2	1	1,250



HOT DIPPED GALVANISED NAILS, min 55µm
Outdoor, exposed to weather. Service Class 3.

Code	Ø (mm)	Length (mm)	Shank	Fuel Cells	Box Qty
142014	2.8	63	Ring	3	3,750
142025	3.1	63	Ring	2	2,500
142031	3.1	75	Ring	2	2,500
142039	3.1	90	Smooth	2	2,500
142040	3.1	90	Ring	2	2,500



GALV-PLUS® NAILS, min 12µm
Indoor not heated, outdoor protected. Service Class 2.


Code	Ø (mm)	Length (mm)	Shank	Fuel Cells	Box Qty
142007	2.8	51	Ring	3	3,750
142062	2.8	51	Ring	1	1,250
142013	2.8	63	Ring	3	3,750
142063	2.8	63	Ring	1	1,250
142024	3.1	63	Ring	2	2,500
142030	3.1	75	Ring	2	2,500
142037	3.1	90	Smooth	2	2,500
142065	3.1	90	Smooth	1	1,250
142038	3.1	90	Ring	2	2,500



BRIGHT NAILS, min 5µm
Indoor, Service Class 1.

Code	Ø (mm)	Length (mm)	Shank	Fuel Cells	Box Qty
142005	2.8	51	Ring	3	3,750
142011	2.8	63	Ring	3	3,750
142029	3.1	75	Ring	2	2,500
142035	3.1	90	Smooth	2	2,500
142036	3.1	90	Ring	2	2,500

PASLODE NailScrew®

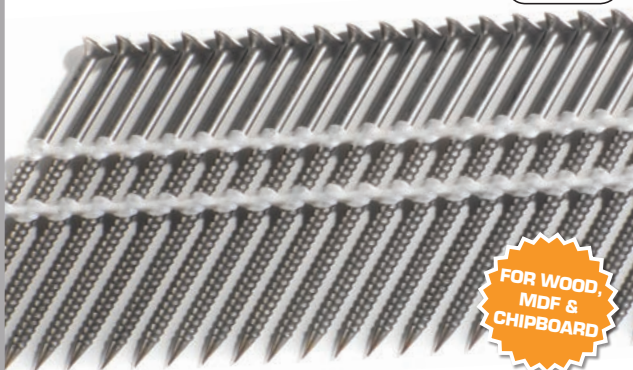

FOR WOOD,
MDF &
CHIPBOARD

Six times faster than standard wood screws, offering improved fixing performance versus ring shank nails, with the ability to remove and re-screw. Ideal for cladding and temporary fixings.



Coarse Thread

Excellent performance when fixing and un-screwing.

CE Marking - EN 14592

Meet CE marking requirements, ensuring safety in use.



STAINLESS STEEL A2-304 NAILSCREW
Outdoor, exposed to weather. Service Class 3.

Code	Ø (mm)	Length (mm)	Shank	Drive	Fuel Cell	Box Qty
142101	2.8	50	Screw	TX15	1	1,250
142103	2.8	65	Screw	TX15	1	1,250
142105	2.8	75	Screw	TX15	1	1,250

FREE TORX BIT IN EVERY BOX.



ELECTRO GALVANISED NAILSCREW, min 12µm
Indoor not heated, outdoor protected. Service Class 2.

Code	Ø (mm)	Length (mm)	Shank	Drive	Fuel Cell	Box Qty
142100	2.8	50	Screw	TX15	1	1,250
142102	2.8	65	Screw	TX15	1	1,250
142104	2.8	75	Screw	TX15	1	1,250

FREE TORX BIT IN EVERY BOX.

Specifically designed for use in Paslode **IM360Ci**



IM360Ci ACCESSORIES

Code	Description	Qty
300348	SERIES-i Fuel Cell Blister Pack	1
018880	Li-ion+ Battery	1
018882	Li-ion Battery Charger	1
900507	In-Car Charger Adaptor	1
018889	Standard Magazine	1
013225	Long Magazine	1
013211	No-Mar Cladding Probe	1
013256	No-Mar Cladding Probe Rubber Tip	1
210610	No Mar Tip	1
013221	Tongue & Groove Probe	1
013223	Steel Tile Probe	1
014974	Ci Tool Carry Case	1
115251	Impulse Cleaner 300ml	1
401482	Impulse Lubricating Oil	1
013690	Impulse/Pulsa Cleaning Kit	1
014121	Safety Glasses to EN166:F	1

Battery Charger



Cleaning Kit



Battery



Cladding Probe



Paslode Tool Case



Scan the QR code to see the IM360Ci video



Customer Services

ITW Construction Products
Unit R8 Blair Court
100 Borron Street
Port Dundas Business Park
Glasgow
G4 9XG
United Kingdom

t : +44(0)141 342 1660
f : +44(0)141 332 7489
e : po-cs@itwcp.com

Freephone Orderlines:

t (UK): 0800 833 381
f (UK): 0800 521 077
t (ROI): 1 800 946 791
f (ROI): 1 800 946 792

Technical Freephone Helplines:

t (UK): 0800 731 4924
t (ROI): 1 800 882 388

w : www.itwcp.com

© ITW Construction Products

No part of this publication may be reproduced without prior permission from ITWCP.

ITW Construction Products - A division of ITW Limited.

www.itwcp.com



YOUR LOCAL DISTRIBUTOR:



IM360Ci

LI-ION FRAMING NAILER

Paslode **IM360Ci** Li-ion cordless framing nailer offers best in class tool power, RounDrive® nails and NailScrew®, a long life Li-ion+ battery and outstanding cold weather performance, **making it the only solution for the construction professional.**



LI-ION+
BATTERY



SERIES-i FUEL

IM360Ci FEATURES AND BENEFITS




Start & Go® Technology
Premium gas technology Li-ion nailer with intelligent power saving technology, increasing battery life up to 25%



Fuel & Battery Gauge
One touch LED indicator shows remaining power and fuel. The tool alerts when there are 300 shots of gas remaining



Quick Charge, Long Life Li-ion+ Battery
13,000 shots per single charge, 200 in just 2 minutes



Cold Weather Performance
Incredible cold weather performance allows users to work down to -15°C



Best Balanced Tool
The tool feels like an extension of your arm due to the optimal balance provided by the latest Paslode gas technology



Best Power to Weight Ratio
With 105 Joules the tool provides the best power to weight ratio on the market. Minimal user fatigue. Maximum working hours



Aggressive Probe
Allows you to use in tighter angles and grips all wood



On/Off battery
On/off battery with lock position secures the battery and tool when not in use



LI-ION BATTERY

UP TO 13,000 SHOTS PER CHARGE

IM360Ci

LI-ION FRAMING NAILER

CORDLESS GAS NAILER FOR ALL TIMBER CONSTRUCTION

TECHNICAL SPECIFICATION

Product weight with battery:	3.8 kg
Dimensions:	384 x 328 x 127mm
Impact force max:	105 J
Nail range:	50 - 90 mm
Max cycle rate per sec (fixings):	2-3
Max cycle rate per hour (fixings):	1,000
Magazine capacity:	47 nails
Long magazine capacity:	85 nails
Fuel cell capacity:	1,250 shots (-5°C)
Fixings per battery charge:	13,000
Battery charge time:	90 mins
Battery type:	Li-ion+
Noise Emission (EN 12549)	
Sound Power Level LwA 1s 1m:	109 dB(A)
Sound Pressure Level LpCpeak:	138 dB(C)
Vibration (EN ISO 8662-11) ahv :	3.9 m/s²

TOOL INCLUDES

Code	Description	Qty
O10391	IM360Ci Framing Gas Nailer	1

- IM360Ci framing gas nailer
- High impact carry case
- **Li-ion+** battery 2.1 Ah
- **Li-ion+** battery charger
- Cleaning solution
- Impulse lubricant
- Safety glasses to EN166:F
- Allen key
- Safety instructions



APPLICATIONS

- Timber frame
- Truss work
- Stud work
- Roof battening
- External cladding
- Joists
- Floor boarding
- Noggins
- Soffits
- Roof decking
- Roofing
- Fencing
- Shuttering
- Decking
- Overboarding
- Hoarding



Roof battening



Cladding



Timber frame



Stud work