


Movement Ties

This range of ties allows masonry walls to be tied back to other structures, (steelwork or masonry) providing restraint in one direction but allowing movement in the other.


This is achieved by placing a "debonding sleeve" over the part of the tie which is to be embedded in the wall, allowing the tie to move within the sleeve.

Also used in movement joints where they occur in long runs of brickwork, the ties spanning over a vertical joint preventing vertical movement but allowing horizontal expansion and contraction.

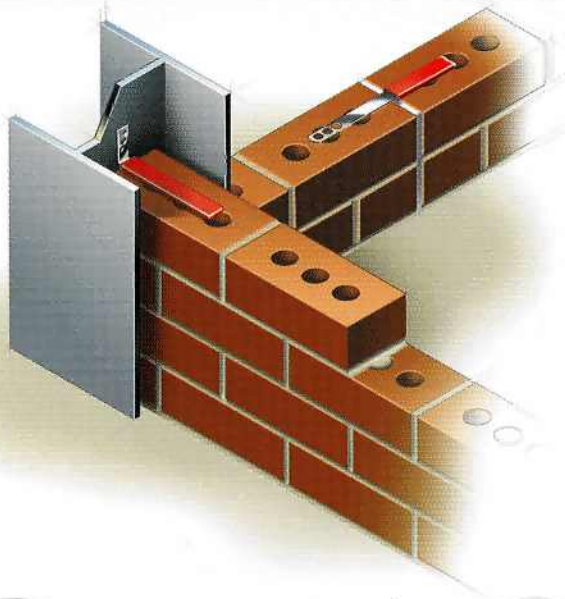


B20

A tie for use across vertical movement joints, complete with de-bonding sleeve, available as a blank bar (B20) or with a safety embedment detail on one end (SPE).

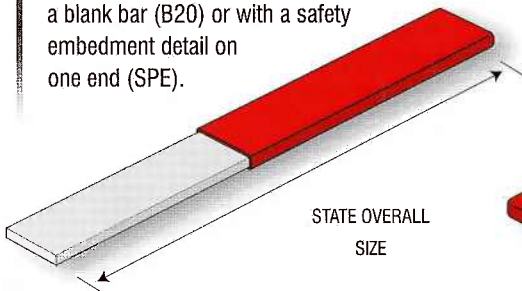

V8PE


This product allows lateral movement between masonry and a fixed channel or slot section. Supplied complete with debonding sleeve.

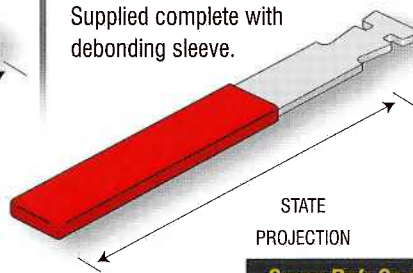

Cross Ref: Section 5 - Channel Systems




SPE

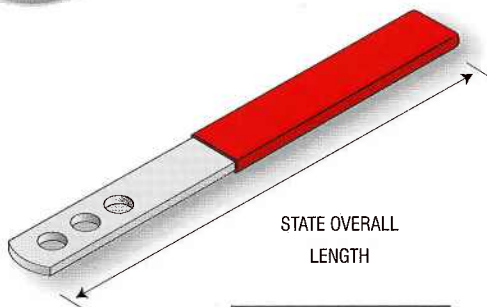

See Section 10 for Variations

V7PE

Ties for restraining masonry to steelwork, whilst allowing lateral movement, V7PE for face fixing, V63PE for side fixing, supplied complete with sleeve.

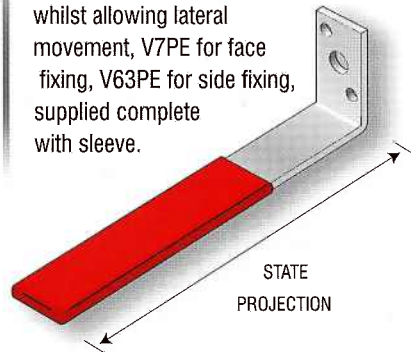

V63PE

