


R-CAS-V Spin-In Capsule with Threaded Rods

High-performance, quick-setting, styrene-free vinylester resin for concrete



Approvals and Reports

- ETA-10-0108



Product information

Features and benefits

- Approved for use with threaded rods in non-cracked concrete (ETAG001 Option 7)
- High performance for use safety critical application - heavy-duty fastenings with small spacing and edge distances
- The system relies on the adhesion between the concrete and resin, which is free from expansion forces. This makes it an ideal choice where close edge and spacing distances are required
- Capsule contains precise amounts of ingredients making it a very consistent product
- Suitable for dry or wet non-cracked concrete
- Styrene free - odourless

Applications

- Threaded rods
- Balustrading
- Railings
- Heavy machinery
- Structural steel
- Steel columns
- Cladding restraints
- Curtain walling
- Fencing & gates manufacturing and installation
- Formwork support systems
- Garage doors
- Guard rails

Base materials


Approved for use in:

- Non-cracked concrete C20/25-C50/60

Also suitable for use in:

- Natural Stone (after site testing)

Installation guide

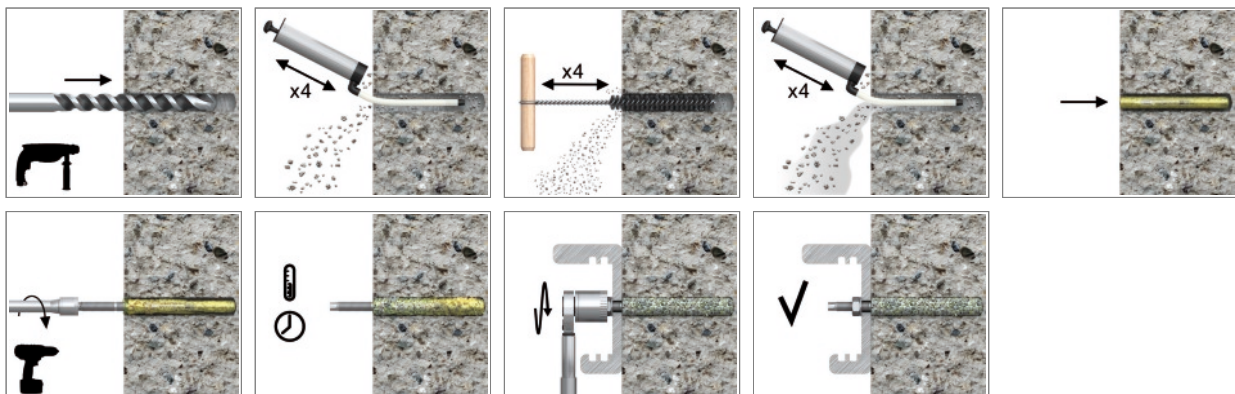


Product information

1. Drill hole to the required diameter and depth for capsule size being used.
2. Clean the hole thoroughly with brush and hand pump at least four times before installation.
3. Insert capsule into the hole. Connect stud to drilling machine using appropriate driver system.
4. Position the stud into the glass capsule then switch on the drilling machine and drive stud into the capsule. Switch off the drilling machine as soon as the bottom of hole is reached.
5. Leave the anchor undisturbed until the curing time elapses.
6. Attach fixture and tighten the nut to the required torque.

| Product Code | Description / Resin Type |
|--------------|-------------------------------|
| R-CAS-V-08 | Styrene Free Vinylester Resin |
| R-CAS-V-10 | |
| R-CAS-V-12 | |
| R-CAS-V-16 | |
| R-CAS-V-20 | |
| R-CAS-V-24 | |
| R-CAS-V-30 | |

Installation data

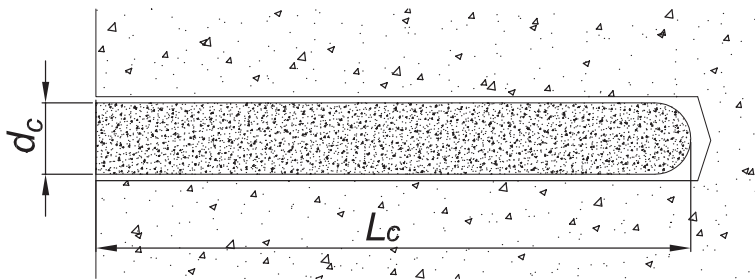

R-STUDS

| Size | | | M8 | M10 | M12 | M16 | M20 | M24 | M30 |
|------------------------------|-------------------|------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Thread diameter | d | [mm] | 8 | 10 | 12 | 16 | 20 | 24 | 30 |
| Hole diameter in substrate | d ₀ | [mm] | 10 | 12 | 14 | 18 | 24 | 28 | 35 |
| Capsule size | | [mm] | 8 | 10 | 12 | 16 | 20 | 24 | 30 |
| Capsule diameter | d _c | [mm] | 9.25 | 10.75 | 12.65 | 16.75 | 21.55 | 23.75 | 33.2 |
| Installation torque | T _{inst} | [Nm] | 10 | 20 | 40 | 80 | 120 | 180 | 300 |
| Min. hole depth in substrate | h ₀ | [mm] | h _{nom} + 5 | h _{nom} + 5 | h _{nom} + 5 | h _{nom} + 5 | h _{nom} + 5 | h _{nom} + 5 | h _{nom} + 5 |
| Min. installation depth | h _{nom} | [mm] | 80 | 90 | 110 | 125 | 170 | 210 | 270 |
| Min. substrate thickness | h _{min} | [mm] | 120 | 130 | 140 | 180 | 230 | 270 | 340 |
| Min. spacing | s _{min} | [mm] | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 |
| Min. edge distance | c _{min} | [mm] | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 | 0.5 * h _{nom} ≥ 40 |

Minimum working and curing time

| Resin temperature | Concrete temperature | Curing time* | Working time |
|-------------------|----------------------|--------------|--------------|
| [°C] | [°C] | [min] | [min] |
| 5 | -5 | 480 | - |
| 5 | 0 | 240 | - |
| 5 | 5 | 150 | - |
| 10 | 10 | 120 | - |
| 15 | 15 | 90 | - |
| 20 | 20 | 45 | - |
| 25 | 30 | 20 | - |
| 25 | 40 | 10 | - |

Mechanical properties

| Size | | | M8 | M10 | M12 | M16 | M20 | M24 | M30 |
|---|--------------|----------------------|-----|-----|-----|-----|-----|-----|------|
| Nominal ultimate tensile strength - tension | f_{uk} | [N/mm ²] | 500 | 500 | 500 | 500 | 500 | 500 | 500 |
| Nominal yield strength - tension | f_{yk} | [N/mm ²] | 400 | 400 | 400 | 400 | 400 | 400 | 400 |
| Cross sectional area - tension | A_s | [mm ²] | 37 | 58 | 84 | 157 | 245 | 353 | 560 |
| Elastic section modulus | W_{el} | [mm ³] | 31 | 62 | 109 | 278 | 541 | 935 | 1868 |
| Characteristic bending resistance | $M^0_{Rk,s}$ | [Nm] | 19 | 37 | 65 | 166 | 324 | 561 | 1124 |
| Design bending resistance | M | [Nm] | 15 | 30 | 52 | 133 | 259 | 449 | 899 |
| Allowable bending resistance | M_{rec} | [Nm] | 11 | 21 | 37 | 95 | 185 | 321 | 642 |
| Nominal ultimate tensile strength - tension | f_{uk} | [N/mm ²] | 800 | 800 | 800 | 800 | 800 | 800 | 800 |
| Nominal yield strength - tension | f_{yk} | [N/mm ²] | 640 | 640 | 640 | 640 | 640 | 640 | 640 |
| Cross sectional area - tension | A_s | [mm ²] | 37 | 58 | 84 | 157 | 245 | 353 | 560 |
| Elastic section modulus | W_{el} | [mm ³] | 31 | 62 | 109 | 278 | 541 | 935 | 1868 |
| Characteristic bending resistance | $M^0_{Rk,s}$ | [Nm] | 30 | 60 | 105 | 266 | 519 | 898 | 1799 |
| Design bending resistance | M | [Nm] | 24 | 48 | 84 | 213 | 416 | 718 | 1439 |
| Allowable bending resistance | M_{rec} | [Nm] | 17 | 34 | 60 | 152 | 297 | 513 | 1028 |
| Nominal ultimate tensile strength - tension | f_{uk} | [N/mm ²] | 700 | 700 | 700 | 700 | 700 | 700 | 700 |
| Nominal yield strength - tension | f_{yk} | [N/mm ²] | 450 | 450 | 450 | 450 | 450 | 450 | 450 |
| Cross sectional area - tension | A_s | [mm ²] | 37 | 58 | 84 | 157 | 245 | 353 | 560 |
| Elastic section modulus | W_{el} | [mm ³] | 31 | 62 | 109 | 278 | 541 | 935 | 1868 |
| Characteristic bending resistance | $M^0_{Rk,s}$ | [Nm] | 26 | 52 | 92 | 233 | 454 | 786 | 1574 |
| Design bending resistance | M | [Nm] | 17 | 34 | 59 | 149 | 291 | 504 | 1009 |
| Allowable bending resistance | M_{rec} | [Nm] | 12 | 24 | 42 | 107 | 208 | 360 | 721 |

Basic performance data

Performance data for single anchor without influence of edge distance and spacing - ETAG 001

| Size | | M8 | M10 | M12 | M16 | M20 | M24 | M30 |
|--|------|----------------------|------|-------|-------|-------|-------|-------|
| Substrate | | Non-cracked concrete | | | | | | |
| Effective embedment depth h_{ef} | [mm] | 80.0 | 90.0 | 110.0 | 125.0 | 170.0 | 210.0 | 270.0 |
| MEAN ULTIMATE LOAD | | | | | | | | |
| TENSION LOAD $N_{Ru,m}$ | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 18.9 | 30.5 | 44.1 | 82.9 | 128.2 | 171.0 | 259.6 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 30.5 | 40.7 | 59.7 | 82.9 | 128.2 | 171.0 | 259.6 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 27.3 | 40.7 | 59.7 | 82.9 | 128.2 | 171.0 | 259.6 |
| SHEAR LOAD $V_{Ru,m}$ | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 11.3 | 18.3 | 26.5 | 49.1 | 76.9 | 110.9 | 176.4 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 18.3 | 30.0 | 42.2 | 79.4 | 123.5 | 177.7 | 282.9 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 16.4 | 25.8 | 37.2 | 69.3 | 107.7 | 155.6 | 247.6 |

Basic performance data

| Size | | M8 | M10 | M12 | M16 | M20 | M24 | M30 |
|--|------|------|------|------|------|-------|-------|-------|
| CHARACTERISTIC LOAD | | | | | | | | |
| TENSION LOAD N_{Rk} | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 18.0 | 29.0 | 42.0 | 69.1 | 106.8 | 142.5 | 216.3 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 26.1 | 33.9 | 49.8 | 69.1 | 106.8 | 142.5 | 216.3 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 26.0 | 33.9 | 49.8 | 69.1 | 106.8 | 142.5 | 216.3 |
| SHEAR LOAD V_{Rk} | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 9.00 | 14.0 | 21.0 | 39.0 | 61.0 | 88.0 | 140.0 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 15.0 | 23.0 | 34.0 | 63.0 | 98.0 | 141.0 | 224.0 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 13.0 | 20.0 | 29.0 | 55.0 | 86.0 | 124.0 | 196.0 |
| DESIGN LOAD | | | | | | | | |
| TENSION LOAD N_{Rd} | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 12.0 | 18.9 | 27.7 | 38.4 | 59.3 | 79.2 | 120.2 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 14.5 | 18.9 | 27.7 | 38.4 | 59.3 | 79.2 | 120.2 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 13.9 | 18.9 | 27.7 | 38.4 | 59.3 | 79.2 | 120.2 |
| SHEAR LOAD V_{Rd} | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 7.20 | 11.2 | 16.8 | 31.2 | 48.8 | 70.4 | 112.0 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 12.0 | 18.4 | 27.2 | 50.4 | 78.4 | 112.8 | 179.2 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 8.33 | 12.8 | 18.6 | 35.3 | 55.1 | 79.5 | 125.6 |
| RECOMMENDED LOAD | | | | | | | | |
| TENSION LOAD N_{rec} | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 8.57 | 13.5 | 19.8 | 27.4 | 42.4 | 56.6 | 85.8 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 10.4 | 13.5 | 19.8 | 27.4 | 42.4 | 56.6 | 85.8 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 9.93 | 13.5 | 19.8 | 27.4 | 42.4 | 56.6 | 85.8 |
| SHEAR LOAD V_{rec} | | | | | | | | |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 5.8 | [kN] | 5.14 | 8.00 | 12.0 | 22.3 | 34.9 | 50.3 | 80.0 |
| R-STUDS METRIC THREADED RODS - STEEL CLASS 8.8 | [kN] | 8.57 | 13.1 | 19.4 | 36.0 | 56.0 | 80.6 | 128.0 |
| R-STUDS METRIC THREADED RODS - A4 | [kN] | 5.95 | 9.16 | 13.3 | 25.2 | 39.4 | 56.8 | 89.7 |

Design performance data

R-STUDS

| Size | | | M8 | M10 | M12 | M16 | M20 | M24 | M30 |
|--|---------------|----------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Effective embedment depth | h_{ef} | [mm] | 80.00 | 90.00 | 110.00 | 125.00 | 170.00 | 210.00 | 270.00 |
| TENSION LOAD | | | | | | | | | |
| STEEL FAILURE; STEEL CLASS 5.8 | | | | | | | | | |
| Characteristic resistance | $N_{Rk,s}$ | [kN] | 18.00 | 29.00 | 42.00 | 78.00 | 122.00 | 176.00 | 280.00 |
| Partial safety factor | γ_{Ms} | - | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 |
| STEEL FAILURE; STEEL CLASS 8.8 | | | | | | | | | |
| Characteristic resistance | $N_{Rk,s}$ | [kN] | 29.00 | 46.00 | 67.00 | 126.00 | 196.00 | 282.00 | 448.00 |
| Partial safety factor | γ_{Ms} | - | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 | 1.50 |
| STEEL FAILURE; STEEL GRADE A4-70 | | | | | | | | | |
| Characteristic resistance | $N_{Rk,s}$ | [kN] | 26.00 | 41.00 | 59.00 | 110.00 | 171.00 | 247.00 | 392.00 |
| Partial safety factor | γ_{Ms} | - | 1.87 | 1.87 | 1.87 | 1.87 | 1.87 | 1.87 | 1.87 |
| COMBINED PULL-OUT AND CONCRETE CONE FAILURE; NON-CRACKED CONCRETE, C20/25 (40°C/24°C) | | | | | | | | | |
| Characteristic bond resistance | T_{Rk} | [N/mm ²] | 13.00 | 12.00 | 12.00 | 11.00 | 10.00 | 9.00 | 8.50 |
| COMBINED PULL-OUT AND CONCRETE CONE FAILURE; NON-CRACKED CONCRETE, C20/25 (80°C/50°C) | | | | | | | | | |
| Characteristic bond resistance | T_{Rk} | [N/mm ²] | 13.00 | 12.00 | 12.00 | 11.00 | 10.00 | 9.00 | 8.50 |
| COMBINED PULL-OUT AND CONCRETE CONE FAILURE | | | | | | | | | |
| Installation safety factor | γ_2 | - | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 |
| Increasing factors for $N_{Rd,p}$ - C30/37 | ψ_c | - | 1.04 | 1.04 | 1.04 | 1.04 | 1.04 | 1.00 | 1.00 |
| Increasing factors for $N_{Rd,p}$ - C40/50 | ψ_c | - | 1.07 | 1.07 | 1.07 | 1.07 | 1.07 | 1.00 | 1.00 |
| Increasing factors for $N_{Rd,p}$ - C50/60 | ψ_c | - | 1.09 | 1.09 | 1.09 | 1.09 | 1.09 | 1.00 | 1.00 |
| CONCRETE CONE FAILURE | | | | | | | | | |
| Installation safety factor | γ_2 | - | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 |
| Factor for non-cracked concrete | k | - | 10.10 | 10.10 | 10.10 | 10.10 | 10.10 | 10.10 | 10.10 |
| Factor for non-cracked concrete | $k_{ucr,N}$ | - | 11.00 | 11.00 | 11.00 | 11.00 | 11.00 | 11.00 | 11.00 |
| Edge distance | $c_{cr,N}$ | [mm] | $1.5 \cdot h_{ef}$ | $1.5 \cdot h_{ef}$ | $1.5 \cdot h_{ef}$ | $1.5 \cdot h_{ef}$ | $1.5 \cdot h_{ef}$ | $1.5 \cdot h_{ef}$ | $1.5 \cdot h_{ef}$ |
| Spacing | $s_{cr,N}$ | [mm] | $3.0 \cdot h_{ef}$ | $3.0 \cdot h_{ef}$ | $3.0 \cdot h_{ef}$ | $3.0 \cdot h_{ef}$ | $3.0 \cdot h_{ef}$ | $3.0 \cdot h_{ef}$ | $3.0 \cdot h_{ef}$ |
| CONCRETE SPLITTING FAILURE | | | | | | | | | |
| Installation safety factor | γ_2 | - | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 | 1.20 |

Design performance data

| Size | | | M8 | M10 | M12 | M16 | M20 | M24 | M30 |
|---|---------------|------|-------|-------|--------|--------|--------|--------|---------|
| SHEAR LOAD | | | | | | | | | |
| STEEL FAILURE; STEEL CLASS 5.8 | | | | | | | | | |
| Characteristic resistance without lever arm | $V_{Rk,s}$ | [kN] | 9.00 | 14.00 | 21.00 | 39.00 | 61.00 | 88.00 | 140.00 |
| Ductility factor | k_7 | - | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| Characteristic resistance with lever arm | $M_{Rk,s}$ | [Nm] | 19.00 | 37.00 | 65.00 | 166.00 | 324.00 | 561.00 | 1124.00 |
| Partial safety factor | γ_{Ms} | - | 1.25 | 1.25 | 1.25 | 1.25 | 1.25 | 1.25 | 1.25 |
| STEEL FAILURE; STEEL CLASS 8.8 | | | | | | | | | |
| Characteristic resistance without lever arm | $V_{Rk,s}$ | [kN] | 15.00 | 23.00 | 34.00 | 63.00 | 98.00 | 141.00 | 224.00 |
| Ductility factor | k_7 | - | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| Characteristic resistance with lever arm | $M_{Rk,s}$ | [Nm] | 30.00 | 60.00 | 105.00 | 266.00 | 519.00 | 898.00 | 1799.00 |
| Partial safety factor | γ_{Ms} | - | 1.25 | 1.25 | 1.25 | 1.25 | 1.25 | 1.25 | 1.25 |
| STEEL FAILURE; STEEL GRADE A4-70 | | | | | | | | | |
| Characteristic resistance without lever arm | $V_{Rk,s}$ | [kN] | 13.00 | 20.00 | 29.00 | 55.00 | 86.00 | 124.00 | 196.00 |
| Ductility factor | k_7 | - | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 | 0.80 |
| Characteristic resistance with lever arm | $M_{Rk,s}$ | [Nm] | 26.00 | 52.00 | 92.00 | 233.00 | 454.00 | 786.00 | 1574.00 |
| Partial safety factor | γ_{Ms} | - | 1.56 | 1.56 | 1.56 | 1.56 | 1.56 | 1.56 | 1.56 |
| CONCRETE PRY-OUT FAILURE | | | | | | | | | |
| Factor | k | - | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| Installation safety factor | γ_2 | - | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| CONCRETE EDGE FAILURE | | | | | | | | | |
| Anchor diameter | d_{nom} | [mm] | 8.00 | 10.00 | 12.00 | 16.00 | 20.00 | 24.00 | 30.00 |
| Effective length of anchor | ℓ_f | [mm] | 80.00 | 90.00 | 110.00 | 125.00 | 170.00 | 210.00 | 270.00 |
| Installation safety factor | γ_2 | - | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Combined pull-out and concrete cone failure (TR 029, p.5.2.2.3. acc. to formula 5.2a - $N_{Rk,p}^0 = n \cdot d \cdot h_{ef} \cdot \tau_{Rk}$).

Concrete cone failure (TR 029, p.5.2.2.4. acc. to formula 5.3a - $N_{Rk,c}^0 = k_1 \cdot F_{ck,cube} \cdot h_{ef}^{1.5}$).

$h_{ef} = h_{nom}$

Product commercial data

| Product Code | Quantity [pcs] | | | Weight [kg] | | | Bar Codes |
|--------------------------|----------------|-------|--------|-------------|-------|--------|---------------|
| | Box | Outer | Pallet | Box | Outer | Pallet | |
| R-CAS-V-08 ¹⁾ | 10 | 480 | 5760 | 0.16 | 7.7 | 121.9 | 5906675280189 |
| R-CAS-V-10 ¹⁾ | 10 | 480 | 5760 | 0.21 | 10.0 | 150.2 | 5906675280196 |
| R-CAS-V-12 ¹⁾ | 10 | 480 | 5760 | 0.26 | 12.7 | 182.3 | 5906675280202 |
| R-CAS-V-16 ¹⁾ | 10 | 480 | 5760 | 0.38 | 18.0 | 246.1 | 5906675280219 |
| R-CAS-V-20 ¹⁾ | 6 | 108 | 1296 | 0.90 | 16.2 | 223.8 | 5906675280226 |
| R-CAS-V-24 ¹⁾ | 6 | 108 | 1296 | 1.04 | 18.8 | 255.3 | 5906675280233 |
| R-CAS-V-30 ¹⁾ | 4 | 32 | 384 | 1.75 | 14.0 | 197.8 | 5906675280240 |

¹⁾ ETA-10-0108