FINISH NAILER

PRODUCT CODE: 013323 Compact, quick and durable straight finish nailer with a no-mar tip to enable precise fixing.

IDEAL USERS A Carpenter or Joiner working on both New Build and Renovation projects.

FEATURE	BENEFIT
 30 Joules of power 	 Ideal power ensures a flush finish in all soft woods and dense MDF
 Lightest and best-balanced finish nailer 	 Allows end-users to manoeuvre into tight spaces and work fatigue-free
 Fast charging, high performing Lithium battery 	 Delivers up to 10,000 shots per charge which equates to 5 brad fuel packs
 Optimised nose design and clear line of sight 	 Provides easy access in the event of a jam



- CONSUMABLES • Wide range of F16 brads available in ELECTRO GALV and STAINLESS STEEL
- IM65 Straight F16 brads available in sizes 16-63mm
- Short brad kit is available in each tool case to fix brads between 16-25mm



FINISH NAILER

The IM65A is a compact, quick and durable angled finish nailer with a no-mar tip to enable precise fixing into tight spaces.



FEATURE	BENEFIT
 Distinctive angled magazine 	 Designed specifically for precision when working in corners and tight spaces
• 30 Joules of power	 Ideal power ensures a flush finish in all soft woods and dense MDF
 Lightest and best-balanced finish nailer 	 Allows end-users to manoeuvre into tight spaces and work fatigue-free
 Fast charging, high performing Lithium battery 	 Delivers up to 10,000 shots per charge which equates to 5 brad fuel packs
 Optimised nose design and clear line of sight 	 Provides easy access in the event of a jam
CONSUM • Wide rar	ABLES Ige of F16 brads available in



ELECTRO GALV and STAINLESS STEEL

IM65A Angled F16 brads available in sizes 32-64mm

FINE FINISH NAILER



IM65F16

F16 x 16mm F16 x 19mm F16 x 25mm F16 x 32mm F16 x 38mm

F16 x 45mm

F16 x 50mm

F16 x 63mm F16 x 25mm

F16 x 32mm

F16 x 50mm

F16 x 63mm

IM65AF16

F16 x 32mm F16 x 38mm

F16 x 45mm F16 x 51mm

F16 x 63mm

F16 x 32mm

F16 x 38mm

F16 x 50mm F16 x 64mm

Paslode



detail applications, producing seamless fixes without the extra time of re-finishing work.

Carpenter or Joiner wo as cabinet and fu

Optimum line of sight and

Depth of drive adjustment

Fast charging, high performing

25 Joules of power

Lithium battery

no mar tip

FEATURE

IM50F18 Paslode

BRAD	QIY	(
F18 x 16mm	2000	39
F18 x 25mm	2000	39
F18 x 32mm	2000	39
F18 x 38mm	2000	39
F18 x 50mm	2000	39

ELECTRO-GALV (INDOOR) STAINLESS STEEL A2-304 (OUTDOOR)

orking on	USERS secret nailing application such rk, beading and shop fitting.
	BENEFIT
	 Enables end-user to increase accuracy in their fixings


Ideal power ensures seamless fixes in all soft woods and dense MDF

Guarantees a flawless finish

Delivers up to 10,000 shots per charge, which equates to 5 brad fuel packs, 200 in just 2 minutes

CONSUMABLES

Thinner 18 gauge brad for discreet fine finish nailing. F18 straight brads available from sizes 16-50mm 1.2mm brad available in ELECTRO GALV



- The IM50 tool is perfect when you need a
- SUPER CLEAN 2nd fix finish.


FINISH BRADS

QTY	RECONSIGNATIONS	Dado rail	Architrave	Skirting	Beading	Door stop	MDF fixing	Hardwood	
2000	921585								
2000	921586								
2000	921587								
2000	921588								
2000	921589								
2000	921590								
2000	921591								
2000	921592								
2000	921593							•	
2000	921594							•	
2000	921595							•	
2000	921596							•	



QTY	APPLICATIONS	Dado rail	Architrave	Skirting	Beading	Door stop	MDF fixing	Hardwood
2000	300270							
2000	300271							
2000	300272							
2000	300273							
2000	300274							
2000	300276							•
2000	300277							•
2000	300279							•
2000	300280							•







aslode tools have a standard 2 year warranty, covering all components providing that Manufacturer's Operating Instructions have been followed, that no modifications have been made or non-original components or spare parts have been used, and that the tool has not been accidentally damaged or neglected.





Unit R8 Blair Court, 100 Borron Street Port Dundas Business Park, Glasgow G4 9XG

f y 💿 🖸 Follow us @PaslodeUK Customer Services: 0800 833381

POCKET GUIDE

A QUICK GUIDE TO ALL PASLODE PRODUCTS



FRAMING NAILER



The **360Xi** framing nailer is light and perfectly balanced to guarantee a great performance for multiple applications. A high performing lithium battery and a weatherproof fuel cell ensures the tool will run all day, every day no matter the challenge.

IDEAL USERS

Most likely to be a Carpenter, Roofer or General Builder working on New Build projects such as large housing developments.

FEATURE	BENEFIT								
 Unbeatable power to weight ratio 	 Able to drive long nails into the hardest substrates 								
 Lighter and better balanced tool: 3.6kg 	Guarantees all day productivity								
Quick release magazine	 Designed to make nail jams a thing of the past 								
 New battery position for high performing battery 	 Ensures your tool will work all day Every day. 								
Re-engineered grip	Ensures extra comfort and convenience								
CONSUMABLES									
Requires Paslode	Requires Paslode 2.8 or 3.1mm RounDrive nails. Available in sizes from 51-90mm								
• Smooth or Ring S	Shank nails are available								
Capable of firing	Capable of firing NailScrews								


DID YOU KNOW:

The Paslode No-mar Cladding probe is available as an interchangeable accessory.

FRAMING NAILER

The IM350+ is a long serving Paslode framing nailer offering reliable technology for the past 30 years. Proven unrivalled gas technology guarantees tool performance and reliability.







• Smooth or Ring Shank nails are available


Wide range of Paslode Nail Fuel Packs available

DID YOU KNOW: I lithium battery is compatible for 7 Paslode tools.

FRAMING NAILS

EUROCODE 5 SERVICE CLASS

 All Paslode framing nails are classified according to Eurocode 5 Service Class 1, 2 and 3 providing a suitable nail for every application




- All Paslode nails are hexavalent chromium, cadmium and lead free
- Technical documentation available via the website www.itwcp.co.uk

APPROVALS

- EN792-13 European safety standard EN792-13 outlines the safe European operation of Paslode tools. Only those fuel cells and Standard consumables identified in the operating manual should be used
- Paslode 3.1 x 63mm Galvanised Plus IM350+/IM360Ci Ring Shank nail will equal or better the performance of BS 5534 batten fixings outlined in the British Standards BS 5534 British Standard


NAIL SHANK TYPES

- RING SHANK: Provides the highest withdrawal resistance. Fixing across the grain
- SMOOTH SHANK: Offers high shear value and lowest withdrawal resistance. Fixing across the grain and into end grain




NAIL SELECTION

SPECIALIST NAILER

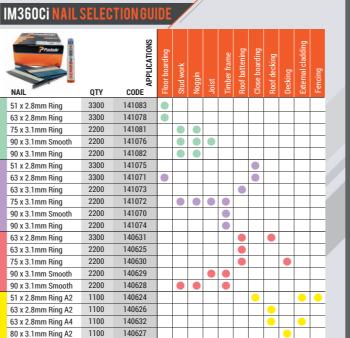

Pasket		APPLICATIONS	Hoor boarding	Stud work	Noggin	st	Timber frame	Roof battening	Close boarding	Roof decking	Decking	External cladding	Fencing
	QTY	CODE	Чĕ	Stu	Noc	Joist	Ē	Boc	Clo	Boc	Dec	EX	Fen
Ring	3300	141202											
Ring	3300	141208											
Ring	2200	141226											
Smooth	2200	141233											
Ring	3300	141204											
Ring	3300	141210											
Ring	2200	141221											
Ring	2200	141227											
Smooth	2200	141234											
Ring	3300	141205											
Ring	3300	141211											
Ring	2200	141222											
Ring	2200	141228											
Smooth	2200	141235											
Unilock	2200	141236											
Ring	1100	141257							•			•	•
Ring	1100	141261								•			
Ring	1100	141266									•		
IDOOR, SER	VICE CLAS	S 1.)											

GALV-PLUS (INDOOR NOT HEATED, OUTDOOR PROTECTED, SERVICE CLASS 2.) HOT DIPPED GALV (OUTDOOR, EXPOSED TO WEATHER, SERVICE CLASS 3.) STAINLESS STEEL A2-304 / A4-316 (OUTDOOR, EXPOSED TO WEATHER, SERVICE CLASS 3.)

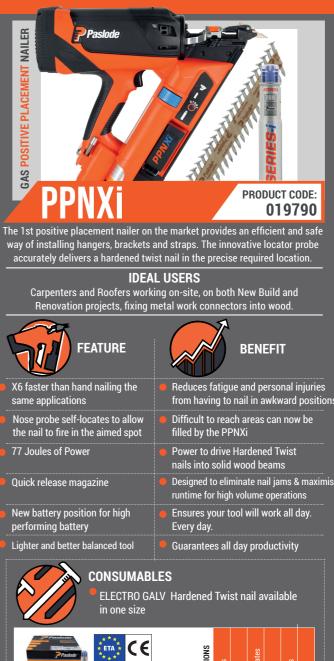

ETA 09/0273

ОТУ

CODE

 1250
 141189
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •
 •

NAIL SIZE

35 x 3.4mm Twist

35 x 3.4mm Twist

SPECIALIST NAILER

The **IM45 GN** is first cordless coil nailer. Its diverse range of nails suits many application such as metal roofing and cladding.

IDEAL USERS

Most likely to be Metal Roofers working on residential and commercial projects. The tool is also suitable for Carpenters working on cladding applications.



• No debris nail collation gives a clean flush finish

Pesiode NAIL	QTY	APPLICATIONS	Metal roof install	External cladding	Overboarding	Fencing	Shingles	Flashing	Packaging	Temporary signage	Composite tiles
35 x 2.5mm NailScrew	1000	142205									
40 x 2.5mm NailScrew	750	142206									
25 x 2.8mm Ring	1000	142200									
25 x 2.8mm Ring	1000	142201	•	•				•			
32 x 2.8mm Ring	1000	142202	•	•		•	•	•			
35 x 2.5mm Ring	1000	142207		•		•	•	•			