


EJOT Insulation Support Anchor

DMH 8 x L (E and V) Hammer Set Tubular bodied anchor

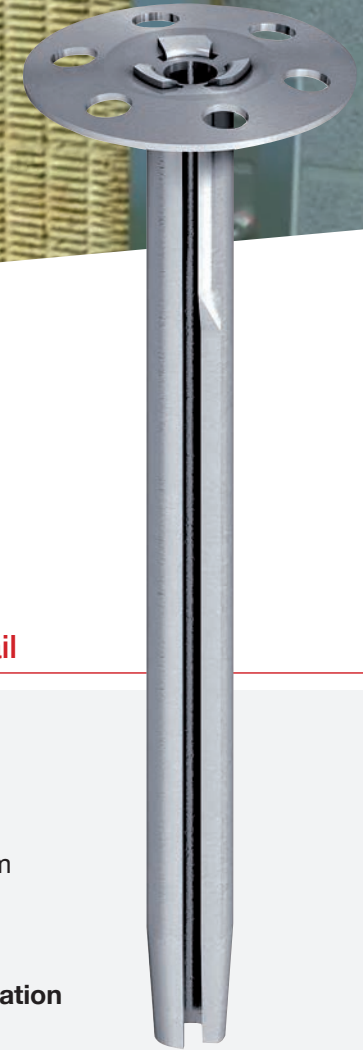

Application

For the mechanical fixing of insulation of fire barrier details on to concrete, dense blockwork and brickwork.

Features

- Cylindrical Carbon/stainless steel anchor with 35mm washer face
- Available in Aluzinc coated carbon steel
- Available in A2 Stainless steel
- One-piece fastener
- Simple installation: hammer into pre-drilled hole
- Aluzinc coated carbon steel spreader washer available **DMT 80 (V)**
- A2 Stainless steel. Stainless steel spreader washer available **DMT 80 (E)**
- Wide range of lengths from 80mm – 300mm
- When fixing into **dense concrete** minimum **40mm** embedment can be achieved

Application Detail

Hole diameter

8mm

Embedment

50.0mm minimum

Hole depth

60.0mm

Minimum application temperature

5° C

Insulation thickness

anchor length minus embedment depth

Performance reference:

1.5kn ultimate pullout performance can be expected from C20 / C25 concrete, 50mm embedment.

EJOT UK Ltd, Hurricane Close,
Sherburn-in-Elmet, Leeds LS25 6PB.

Tel: 01977 687040

Fax: 01977 687041

Email: info@ejot.co.uk