


# TOGE TID

Insulating anchor for cold-, heat- and fire-protection

## Stainless Steel A2

Version without cover cap  
Head Ø35 mm

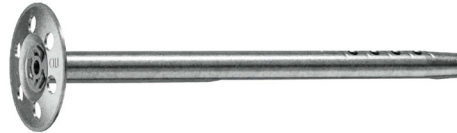

R 30 - R 120

Item nr.	Designation	Depth of drill hole $h_{o1} / h_{o2} / h_{o3}$	Embedment depth of anchor $h_{nom1} / h_{nom2} / h_{nom3}$	Max. thickness of fixture $t_{fix1} / t_{fix2} / t_{fix3}$	Packing Unit
031 063 050	TIDR 50	45 mm	40 mm	10 mm	250
031 063 080	TIDR 80	45 mm	40 mm	40 mm	250
031 063 110	TIDR 110	45 mm	40 mm	70 mm	250
031 063120	TIDR 120	45 mm	40 mm	80 mm	250
031 063 140	TIDR 140	45 mm	40 mm	100 mm	250
031 063 170	TIDR 170	45 mm	40 mm	130 mm	250
031 063 200	TIDR 200	45 mm	40 mm	160 mm	250
031 063 250	TIDR 250	45 mm	40 mm	210 mm	200
031 063 300	TIDR 300	45 mm	40 mm	260 mm	200