



Designated according to The Construction Products (Amendment etc.) (EU Exit) Regulations 2020

UK Technical Assessment	UKTA-0836-22/6266 of 25/11/2022
Technical Assessment Body issuing the UK Technical Assessment:	British Board of Agrément
Trade name of the construction product:	VJ Technology Injection system E410+ EC 410+ for use in masonry
Product family to which the construction product belongs:	Product code 33 - Fixings
Manufacturer:	VJ Technology Ltd. Brunswick Road Cobbs Wood Ind. Estate ASHFORD KENT TN23 1EN UK
Manufacturing plant(s):	VJ Technology Plant 1
This UK Technical Assessment contains:	58 pages including 3 Annexes which form an integral part of this assessment
This UK Technical Assessment is issued in accordance with The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 on the basis of:	EAD 330076-00-0604

Communication of this UK Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made with the written consent of the British Board of Agrément. Any partial reproduction must be identified as such.

1 Technical description of the product

The E410+, EC410+ modified Epoxy acrylate resin without styrene for masonry is bonded anchor consisting of a cartridge with injection mortar, a steel element, and a plastic sleeve. The steel elements are the commercial threaded rods with hexagon nut and washer. The steel elements are manufactured of galvanized or zinc plated steel, stainless or high corrosion resistance steel.

The anchor is placed into a drilled hole filled with injection mortar. The steel element is anchored via the bond between metal part, injection mortar and masonry.

The illustration and the description of the product are given in Annex A.

2 Specification of the intended use(s) in accordance with the applicable UK Assessment Document (hereinafter UKAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer but are to be regarded only as a means for choosing the products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Reduction factor for job site tests (β – factor)	See Annex C1
Characteristic resistance for tension and shear loads	See Annex C5 to C39
Characteristic resistance for bending moments	See Annex C2
Displacement under shear and tension loads	See Annex C5 to C38
Edge distances and spacing	See Annex C4 to C38

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

3.3 Health, hygiene, and the environment (BWR 3)

Regarding dangerous substances, there may be additional legislative requirements falling outside of the scope of this document. These requirements must be complied with as appropriate.

3.4 Safety and accessibility in use (BWR 4)

For basic requirement safety in use the same criteria are valid as for Basic Requirement Mechanical resistance and stability.

3.5 Protection against noise (BWR 5)

Not relevant.

3.6 Energy economy and heat retention (BWR 6)

Not relevant.

3.7 Sustainable use of natural resources (BWR 7)

No performance assessed.

3.8 General aspects relating to fitness for use

Durability and serviceability are only ensured if the specifications of intended use according to Annex B1 are kept.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied

4.1 System of assessment and verification of constancy of performance

According to UKAD No. 330076-00-0604 and Annex V of the Construction Products Regulation (Regulation (EU) 305/2011 as brought into UK law and amended, the system of assessment and verification of constancy of performance (AVCP) 1 applies.

Product	Intended use	Level or class	System
Injection anchors for use in masonry	For fixing and/or supporting to masonry, structural elements (which contributes to the stability of the construction works) or heavy units	-	1

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable UKAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with the British Board of Agrément and made available to the UK Approved Bodies involved in the conformity attestation process.

5.1 UKCA marking for the product/system must contain the following information:

- Identification number of the Approved Body
- Name/address of the manufacturer of the product/ system
- Marking with intention of clarification of intended use
- Date of marking
- Number of certificate of constancy of performance
- UKTA number.

On behalf of the British Board of Agrément



Date of Issue: 25 November 2022

Hardy Giesler
Chief Executive Officer




British Board of Agrément,
1st Floor Building 3
Hatters Lane
Croxley Park
Watford
WD18 8YG

ANNEXES


Annex A1 –	Product description – Installed condition
Annex A2 –	Product description – Injection system
Annex A3 –	Product description – Threaded rod
Annex A4 –	Product description – Materials
Annex A5 –	Product description – Sleeves
Annex B1 –	Intended use – Specifications
Annex B2 –	Intended use – Brick types and properties with corresponding fastening elements
Annex B3 –	Intended use – Brick types and properties with corresponding fastening elements
Annex B4 –	Intended use – Brick types and properties with corresponding fastening elements
Annex B5 –	Intended use – Installation parameters and cleaning brush
Annex B6 –	Intended use – Working and curing time
Annex B7 –	Intended use – Installation instruction Solid masonry and Autoclaved Aerated Concrete
Annex B8 –	Intended use – Installation instructions (hollow brick) and Solid lightweight Concrete
Annex C1 –	Performances – β -factors for job site testing under tension load
Annex C2 –	Performances – Characteristic tension, shear resistance and bending moment of threaded rod
Annex C3 –	Performances – Edge distance and anchor spacing
Annex C4 –	Performance Autoclaved Aerated Concrete - AAC2 – Brick description, drawing – Installation parameters, Displacement
Annex C5 –	Performance Autoclaved Aerated Concrete - AAC2 – Characteristic values of resistance under tension and shear load
Annex C6 –	Performance Autoclaved Aerated Concrete - AAC4 – Brick description, drawing – Installation parameters, Displacement
Annex C7 –	Performance Autoclaved Aerated Concrete - AAC4 – Characteristic values of resistance under tension and shear load
Annex C8 –	Performance Autoclaved Aerated Concrete - AAC6 – Brick description, drawing – Installation parameters, Displacement
Annex C9 –	Performance Autoclaved Aerated Concrete - AAC6 – Characteristic values of resistance under tension and shear load
Annex C10 –	Performance Calcium solid bricks KS-NF – Brick description, drawing – Installation parameters, Displacement
Annex C11 –	Performance Calcium solid bricks KS-NF – Characteristic values of resistance under tension and shear load
Annex C12 –	Performance Calcium hollow bricks KS L-3DF – Brick description, drawing – Installation parameters, Displacement
Annex C13 –	Performance Calcium hollow bricks KS L-3DF – Characteristic values of resistance under tension and shear load
Annex C14 –	Performance Calcium hollow bricks KS L-12DF – Brick description, drawing – Installation parameters, Displacement
Annex C15 –	Performance Calcium hollow bricks KS L-12DF – Characteristic values of resistance under tension and shear load
Annex C16 –	Performance Clay solid brick Mz-DF – Brick description, drawing – Installation parameters, Displacement
Annex C17 –	Performance Clay solid brick Mz-DF – Characteristic values of resistance under tension and shear load
Annex C18 –	Performance Clay hollow brick HLz-16DF – Brick description, drawing – Installation parameters, Displacement
Annex C19 –	Performance Clay hollow brick HLz-16DF – Characteristic values of resistance under tension and shear load

- Annex C20 – Performance Clay hollow brick Porotherm Homebric – Brick description, drawing – Installation parameters, Displacement
- Annex C21 – Performance Clay hollow brick Porotherm Homebric – Characteristic values of resistance under tension and shear load
- Annex C22 – Performance Clay hollow brick BGV Thermo – Brick description, drawing – Installation parameters, Displacement
- Annex C23 – Performance Clay hollow brick BGV Thermo – Characteristic values of resistance under tension and shear load
- Annex C24 – Performance Clay hollow brick Calibric Th – Brick description, drawing – Installation parameters, Displacement
- Annex C25 – Performance Clay hollow brick Calibric Th – Characteristic values of resistance under tension and shear load
- Annex C26 – Performance Clay hollow brick Calibric Th – Brick description, drawing – Installation parameters, Displacement
- Annex C27 – Performance Clay hollow brick Calibric Th – Characteristic values of resistance under tension and shear load
- Annex C28 – Performance Clay hollow brick Blocchi Leggeri – Brick description, drawing – Installation parameters, Displacement
- Annex C29 – Performance Clay hollow brick Blocchi Leggeri – Characteristic values of resistance under tension and shear load
- Annex C30 – Performance Clay hollow brick Doppio Uni – Brick description, drawing – Installation parameters, Displacement
- Annex C31 – Performance Clay hollow brick Doppio Uni – Characteristic values of resistance under tension and shear load
- Annex C32 – Performance hollow light weight concrete Bloc creux B40 – Brick description, drawing, Installation parameters, Displacement
- Annex C33 – Performance hollow light weight concrete Bloc creux B40 – Characteristic values of resistance under tension and shear load
- Annex C34 – Performance Solid light weight concrete LAC – Brick description, drawing, Installation parameters, Displacement
- Annex C35 – Performance Solid light weight concrete LAC – Characteristic values of resistance under tension and shear load
- Annex C36 – Performance LECA LEX harkko RUH-200 Hollow – Brick description, drawing, Installation parameters, Displacement
- Annex C37 – Performance LECA LEX harkko RUH-200 Hollow – Characteristic values of resistance under tension and shear load – Displacement
- Annex C38 – Performance LECA LEX harkko RUH-200 Kulma Solid – Brick description, drawing, Installation parameters, Displacement
- Annex C39 – Performance LECA LEX harkko RUH-200 Kulma Solid – Characteristic values of resistance under tension and shear load


Installation in hollow brick; threaded rod with sleeve

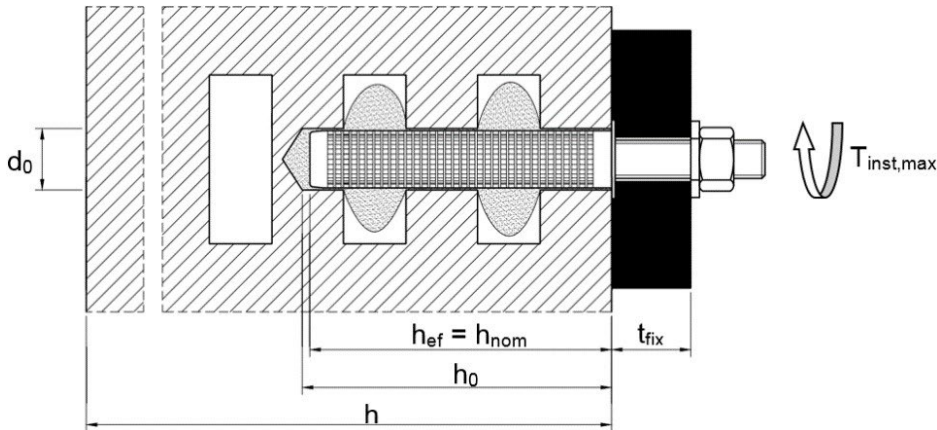

Installation in solid brick; threaded rod with sleeve

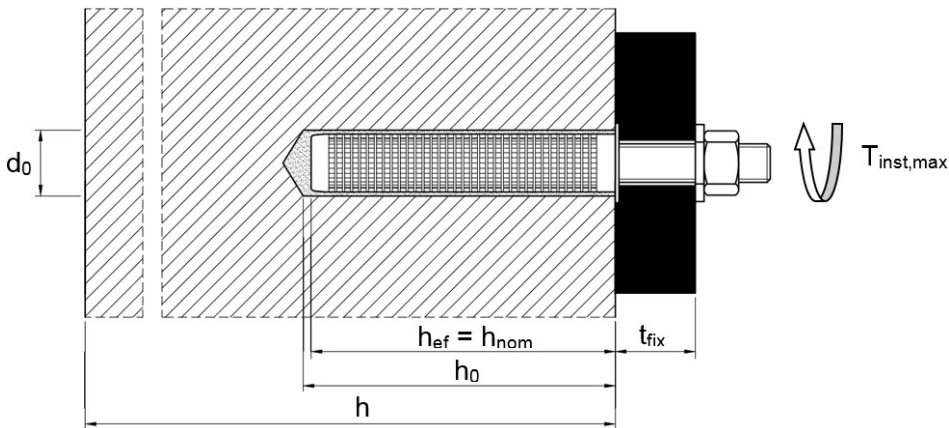

Installation in solid brick; threaded rod without sleeve

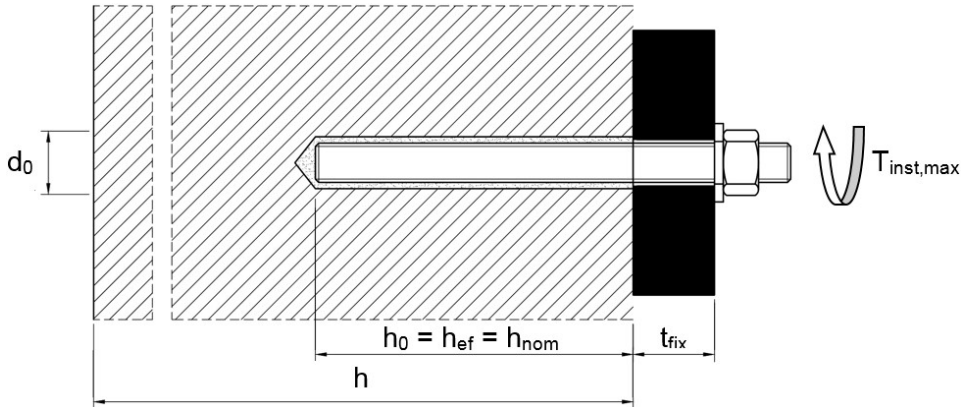

- | | | | |
|----------------|----------------------------------|-----------|-----------------------------------|
| d_0 | = nominal drill hole diameter | h | = thickness of member |
| t_{fix} | = thickness of fixture | h_0 | = depth of drill hole at shoulder |
| $T_{inst,max}$ | = max installation torque moment | h_{ef} | = effective anchorage depth |
| | | h_{nom} | = overall embedment depth |


VJ Technology Injection System for masonry E410+, EC410+

Product description
Installed condition


Annex A1

Cartridge: E410+, EC410+


150 ml, 280 ml, 300 ml up to 333 ml, 380 ml up to 420 ml cartridge (Type: coaxial)

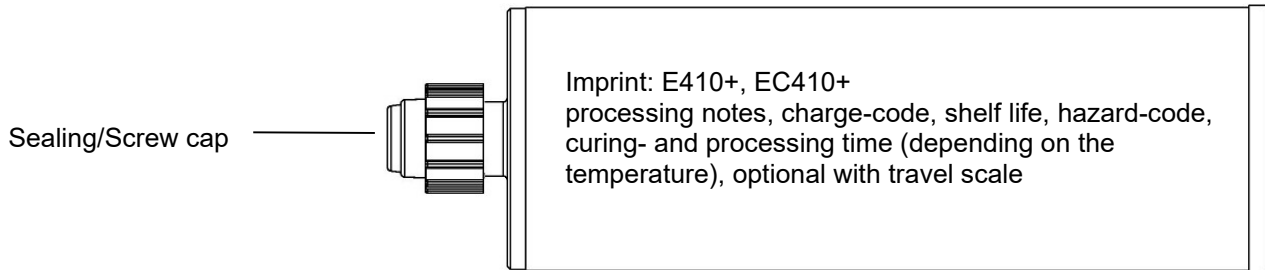

235 ml, 345 ml up to 360 ml, 825 ml cartridge (Type: “side-by-side”)

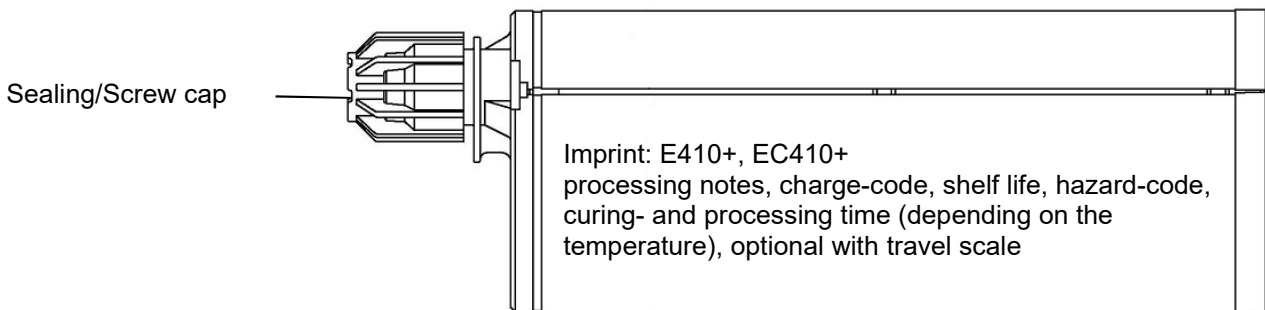

165 ml and 300 ml cartridge (Type: “foil tube”)

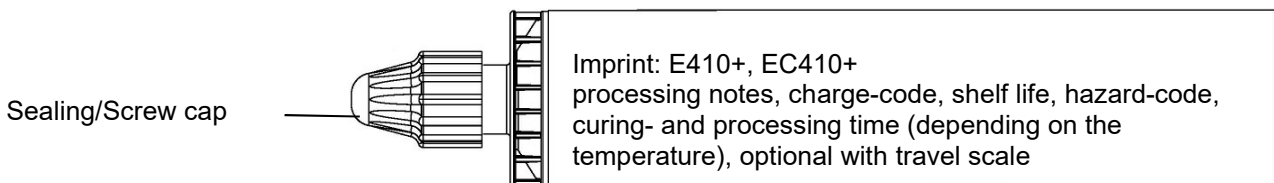

Static mixer

SM 14W



or

CM 8W




**VJ Technology Injection System for masonry
E410+, EC410+**

Product description
Injection system

Annex A2

Threaded rod M8 / M10 / M12 / M16

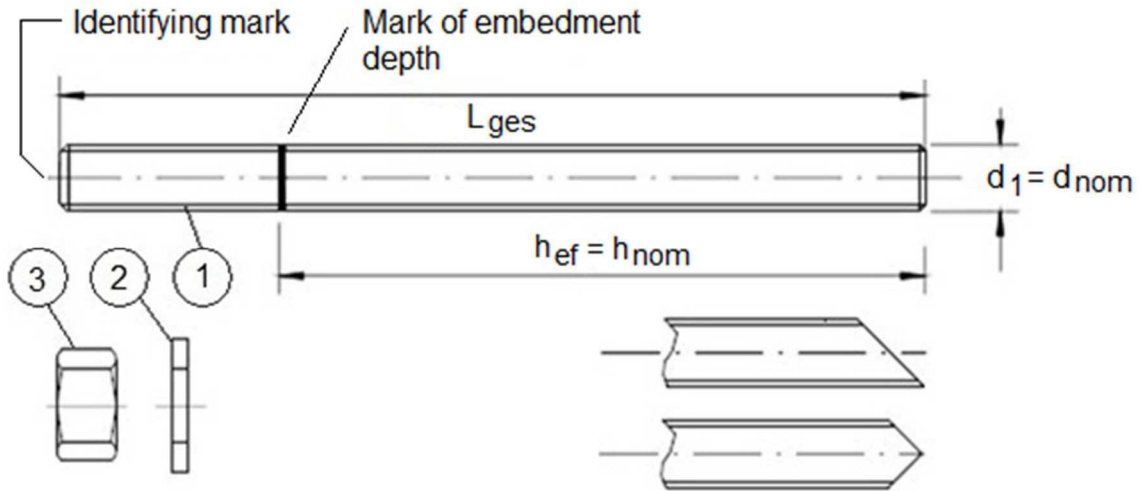

Commercial standard threaded rod with:

- Materials, dimensions, and mechanical properties acc. Table A1
- Inspection certificate 3.1 acc. to BS EN 10204: 2004. The document shall be stored.
- Marking of embedment depth

<p>VJ Technology Injection System for masonry E410+, EC410+</p>	<p>Annex A3</p>
<p>Product description Threaded rod</p>	

Table A1: Materials

Part	Designation	Material
Steel, zinc plated $\geq 5 \mu\text{m}$ acc. to BS EN ISO 4042: 2018 or Steel, hot-dip galvanised $\geq 40 \mu\text{m}$ acc. to BS EN ISO 1461: 2009 and BS EN ISO 10684: 2011 + AC: 2009		
1	Anchor rod	Steel, BS EN ISO 683-4: 2018 or BS EN 10263:2017 Strength class 4.6, 4.8, 5.6, 5.8, 8.8 BS EN 1993-1-8: 2005 + AC: 2009
2	Hexagon nut, BS EN ISO 4032:2012	Steel acc. to BS EN ISO 683-4: 2018 or BS EN 10263:2017 Strength class 4 (for class 4.6, 4.8 rod) BS EN ISO 898-2: 2012 Strength class 5 (for class 5.6, 5.8 rod) BS EN ISO 898-2: 2012 Strength class 8 (for class 8.8 rod) BS EN ISO 898-2: 2012
3	Washer, BS EN ISO 887: 2000, BS EN ISO 7089: 2000, BS EN ISO 7093: 2000, or BS EN ISO 7094: 2000	Steel, zinc plated or hot-dip galvanised
Stainless steel		
1	Anchor rod	Material 1.4401 / 1.4404 / 1.4571, BS EN 10088-1: 2014, Strength class 70 BS EN ISO 3506-1: 2020 Strength class 80 BS EN ISO 3506-1: 2020
2	Hexagon nut, BS EN ISO 4032: 2012	Material 1.4401 / 1.4404 / 1.4571 BS EN 10088-1:2014, Strength class 70 (for class 70 rod) BS EN ISO 3506-2: 2020 Strength class 80 (for class 80 rod) BS EN ISO 3506-2: 2020
3	Washer, BS EN ISO 887:2000, BS EN ISO 7089: 2000, BS EN ISO 7093: 2000, or BS EN ISO 7094: 2000	Material 1.4401, 1.4404 or 1.4571, BS EN 10088-1: 2014
High corrosion resistant steel (HCR)		
1	Anchor rod	Material 1.4529 / 1.4565, BS EN 10088-1:2014, Strength class 70 BS EN ISO 3506-1: 2020 Strength class 80 BS EN ISO 3506-1: 2020
2	Hexagon nut, BS EN ISO 4032: 2012	Material 1.4529 / 1.4565 BS EN 10088-1:2014, Strength class 70 (for class 70 rod) BS EN ISO 3506-2: 2020 Strength class 80 (for class 80 rod) BS EN ISO 3506-2: 2020
3	Washer, BS EN ISO 887:2000, BS EN ISO 7089: 2000, BS EN ISO 7093: 2000 or BS EN ISO 7094: 2000	Material 1.4529 / 1.4565, BS EN 10088-1:2014
VJ Technology Injection System for masonry E410+, EC410+		Annex A4
Product description Materials		

Sleeve (Plastic)

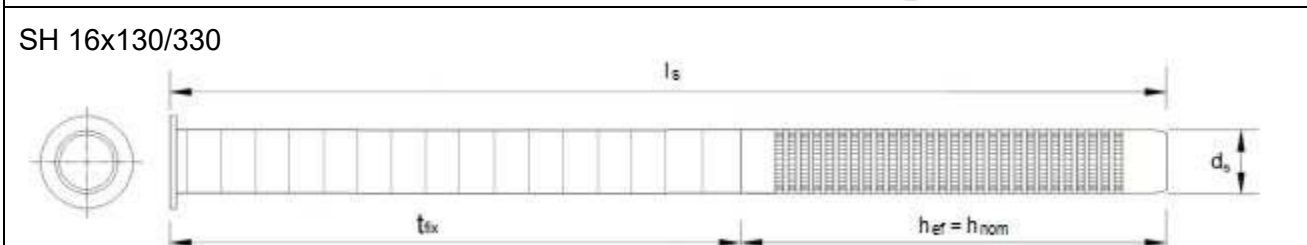
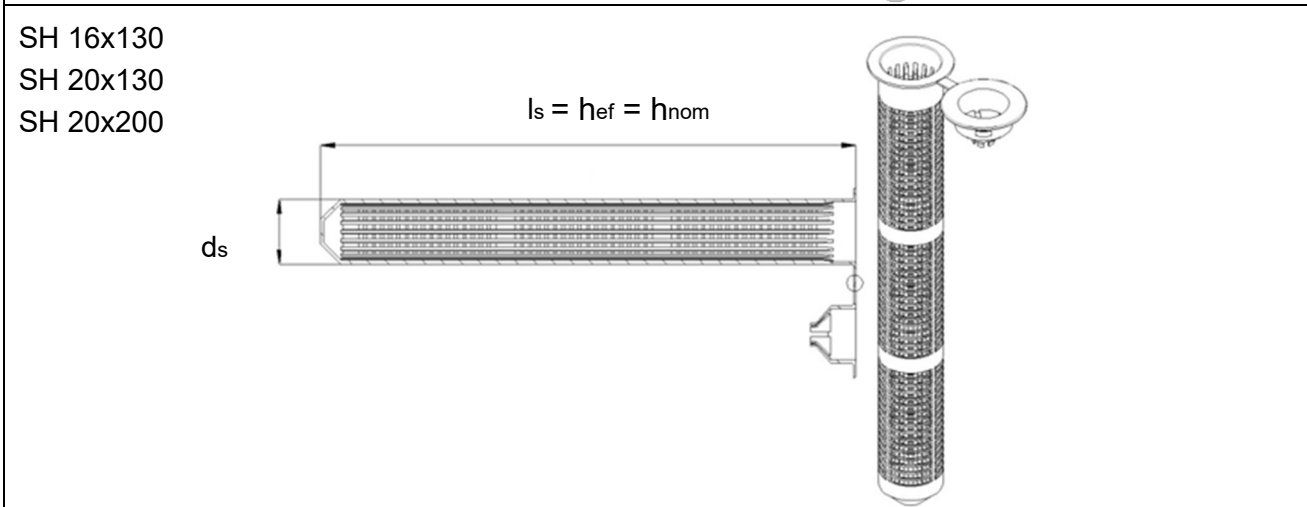
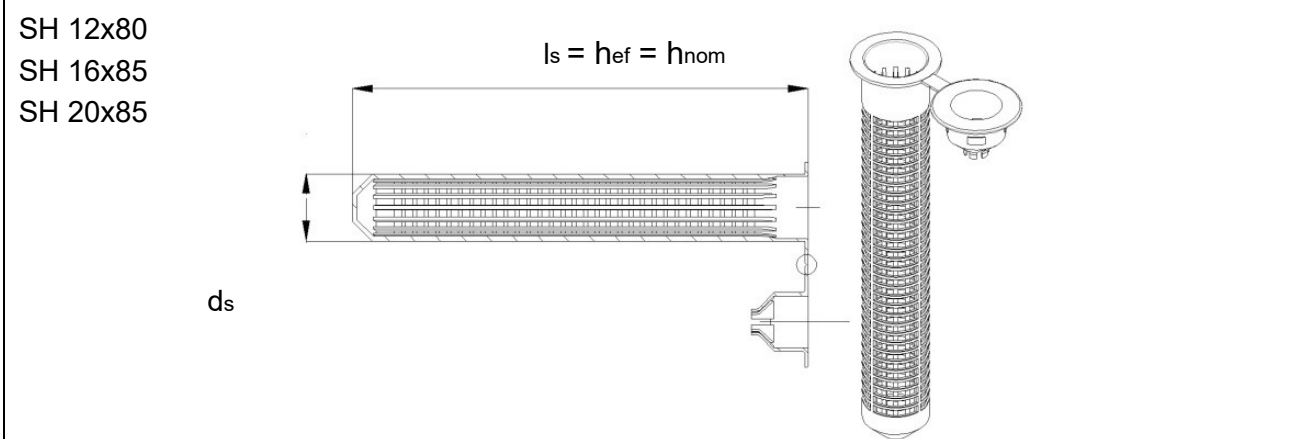


Table A2: Sleeve sizes (mm)

Size	Sleeve		
	d_s [mm]	l_s [mm]	$h_{ef} = h_{nom}$ [mm]
SH12x80	12	80	80
SH16x85	16	85	85
SH16x130	16	130	130
SH16x130/330	16	330	130
SH20x85	20	85	85
SH20x130	20	130	130
SH20x200	20	200	200

VJ Technology Injection System for masonry E410+, EC410+	Annex A5
Production description Sleeves	

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads

Base materials

- Autoclaved Aerated Concrete (Use category d) to Annex B2.
- Solid brick masonry (Use category b), according to Annex B2 to B4.
- Hollow brick masonry (Use category c), according to Annex B2 to B4.
- Mortar strength class of the masonry M2,5 at minimum according to BS EN 998-2: 2016.
- For other bricks in solid masonry and in hollow or perforated masonry, the characteristic resistance of the anchor may be determined by job site tests according to TR053 under consideration of the β factor to Section 3.3.

Note: The characteristic resistances are also valid for larger brick sizes and larger compressive strength of the masonry unit.

Temperature range:

- T_a : -40°C to +40°C (max. short. term temperature +40°C and max. long term temperature +24°C)
- T_b : -40°C to +80°C (max. short. term temperature +80°C and max. long term temperature +50°C)

Use conditions (Environmental conditions)

- Dry and wet structures (regarding injection mortar).
- Structures subject to dry internal conditions (zinc coated steel, stainless steel, or high corrosion resistant steel).
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no aggressive conditions exist (stainless steel or high corrosion resistant steel).
- Structures subject to external atmospheric exposure and to permanently damp internal condition if other aggressive conditions exist (high corrosion resistant steel).

Note: Aggressive conditions are e.g., permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g., in desulphurization plants or road tunnels where de-icing materials are used).

Use categories in respect of installation and use:

- Category d/d: Installation and use in dry masonry
- Category w/w: Installation and use in wet masonry

Design:

- Verifiable calculation notes and drawings are prepared taking account the relevant masonry in the region of the anchorage, the loads to be transmitted and their transmission to the supports of the structure. The position of the anchor is indicated on the design drawings.
- The anchorage is designed in accordance with the EAD 330076-00-0604, Annex C, Design method A under the responsibility of an engineer experienced in anchorages and masonry work.

Installation:

- Dry or wet structures
- Anchor Installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.

VJ Technology Injection System for masonry E410+, EC410+	Annex B1
Intended use Specifications	

Table B1: Overview brick types and properties with corresponding fastening elements (Anchors and Sleeves)







Brick-Nr.	Brick type	picture	Brick size Length x width x height	Compressive strength	Bulk density	Sleeve - Anchor type	Annex
			[mm]	[N/mm ²]	[kg/dm ³]		
Autoclaved aerated concrete units according to BS EN 771-4: 2011 + A1: 2015							
1	Autoclaved Aerated Concrete AAC2		599 x 375 x 249	2	0.35	M8 / M10 / M12 / M16	C4 / C5
2	Autoclaved Aerated Concrete AAC4		499 x 375 x 249	4	0.5	M8 / M10 / M12 / M16	C6 / C7
3	Autoclaved Aerated Concrete AAC6		499 x 240 x 249	6	0.6	M8 / M10 / M12 / M16	C8 / C9
Calcium silicate masonry units according to BS EN 771-2: 2011 + A1: 2015							
4	Calcium silicate solid brick KS-NF		240 x 115 x 71	10 20 27	2.0	M8 / M10 / M12 / M16 SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16 SH 20x200 – M12 / M16	C10 / C11
5	Calcium silicate hollow brick KS L-3DF		240 x 175 x 113	8 12 14	1.4	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16 SH 20x200 – M12 / M16	C12 / C13
6	Calcium silicate hollow brick KS L-12DF		498 x 175 x 238	10 12 16	1.4	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x130 – M12 / M16	C14 / C15
VJ Technology Injection System for masonry E410+, EC410+						Annex B2	
Intended use Brick types and properties with corresponding fastening elements							

Table B1: Overview brick types and properties with corresponding fastening elements (Anchors and Sleeves)













Brick-Nr.	Brick type	picture	Brick size Length x width x height	Compressive strength	Bulk density	Sleeve - Anchor type	Annex
			[mm]	[N/mm ²]	[kg/dm ³]		
Clay masonry units according to BS EN 771-1: 2011 + A1: 2015							
7	Clay solid brick Mz – DF		240 x 115 x 55	10 20 28	1.64	M8 / M10 / M12 / M16 SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16 SH 20x200 – M12 / M16	C16 / C17
8	Clay hollow brick HLz-16DF		497 x 240 x 238	6 9 12 14	0.83	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16 SH 20x200 – M12 / M16	C18 / C19
9	Clay hollow brick Porotherm Homebric		500 x 200 x 299	6 8 10	0.68	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16	C20 / C21
10	Clay hollow brick BGV Thermo		500 x 200 x 314	4 6 10	0.62	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16	C22 / C23
11	Clay hollow brick Calibric Th		500 x 200 x 314	6 9 12	0.62	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16	C24 / C25
12	Clay hollow brick Urbanbric		560 x 200 x 274	6 9	0.74	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16	C26 / C27
VJ Technology Injection System for masonry E410+, EC410+						Annex B3	
Intended use Brick types and properties with corresponding fastening elements							

Table B1: Overview brick types and properties with corresponding fastening elements (Anchors and Sleeves)

Brick-Nr.	Brick type	picture	Brick size Length x width x height	Compressive strength	Bulk density	Sleeve - Anchor type	Annex
			[mm]	[N/mm ²]	[kg/dm ³]		
Clay masonry units according to BS EN 771-1: 2011 + A1: 2015							
13	Clay hollow brick Blocchi Leggeri		250 x 120 x 250	4 6 8	0.55	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16 SH 20x200 – M12 / M16	C28 / C29
14	Clay hollow brick Doppio Uni		250 x 120 x 120	10 16 20 28	0.92	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16 SH 20x200 – M12 / M16	C30 / C31
Light weight concrete according to BS EN 771-3: 2011 + A1 2015							
15	Hollow light weight concrete Bloc creux B40		494 x 200 x 190	4	0.80	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16	C32 / C33
16	Solid light weight concrete		300 x 123 x 248	2	0.63	M8 / M10 / M12 / M16	C34 / C35
17	Hollow light weight Leca Lex harkko RUH-200		498 x 200 x 195	2.7	0.62	SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16	C36 / C37
18	Solid light weight Leca Lex RUH-200 Kulma		498 x 200 x 195	3	0.62	M8 / M10 / M12 / M16 SH 12x80 – M8 SH 16x85 – M8 / M10 SH 16x130 – M8 / M10 SH 16x130/330 - M8 / M10 SH 20x85 – M12 / M16 SH 20x130 – M12 / M16	C38 / C39
VJ Technology Injection System for masonry E410+, EC410+						Annex B4	
Intended use Brick types and properties with corresponding fastening elements							

Installation: Steel brush



Table B2: Installation parameters in Autoclaved Aerated Concrete AAC and solid masonry (without sleeve)

Threaded rod			M8	M10	M12	M16
Nominal drill hole diameter	d_0	[mm]	10	12	14	18
Drill hole depth	h_0	[mm]	80	90	100	100
Effective anchorage depth	$h_{ef} = h_{nom}$	[mm]	80	90	100	100
Minimum wall thickness	h_{min}	[mm]	$h_{ef} + 30$			
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	9	12	14	18
Diameter of Steel brush	$d_b \geq$	[mm]	12	14	16	20
Max torque moment	$T_{inst,max}$	[Nm]	See parameters of brick Annex C4 to Annex C39			

Table B3: Installation parameters in solid and hollow masonry (with sleeve)

Threaded rod			M8	M8 / M10			M12 / M16		
Sleeve		[mm]	SH12x80	SH16x85	SH16x130	SH16x130/ 330	SH20x85	SH20x130	SH20x200
	Nominal drill hole diameter	d_0	[mm]	12	16	16	16	20	20
Drill hole depth	h_0	[mm]	85	90	135	135 + t_{fix1}	90	135	205
Effective anchorage depth	$h_{ef} = h_{nom}$	[mm]	80	85	130	130	85	130	200
Minimum wall thickness	h_{min}	[mm]	115	115	195	195	115	195	240
Diameter of clearance hole in the fixture	$d_f \leq$	[mm]	9	9 (M8) / 12 (M10)			14 (M12) / 18 (M16)		
Diameter of brush	$d_b \geq$	[mm]	14	18			22		
Max torque moment	$T_{inst,max}$	[Nm]	See parameters of brick Annex C4 to Annex C39						

¹⁾ $t_{fix} < 200$ mm

VJ Technology Injection System for masonry E410+, EC410+

Intended use
Installation parameters and cleaning brush

Annex B5

Table B4: Maximum working time and minimum curing time

Temperature in the base material	E410+		EC410+	
	Max. working time	Min. curing time	Max. working time	Min. curing time
-10°C to -6°C			60 min	4 h
-5°C to -1°C	90 min	6 h	45 min	2 h
0°C to +4°C	45 min	3 h	25 min	80 min
+5°C to +9°C	25 min	2 h	10 min	45 min
+10°C to +14°C	20 min	100 min	4 min	25 min
+15°C to +19°C	15 min	80 min	3 min	20 min
+20°C to +29°C	6 min	45 min	2 min	15 min
+30°C to +34°C	4 min	25 min		
+35°C to +39°C	2 min	20 min		
Cartridge temperature	+5°C to +40°C		-5°C to +30°C	


VJ Technology Injection System for masonry E410+, EC410+

Intended use
Working and curing time


Annex B6

Installation instructions

Preparation of cartridge




1. Remove the cap and attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. In case of a foil tube cartridge, cut off the clip before use. For every working interruption longer than the recommended working time (Table B4) as well as for new cartridges, a new static-mixer shall be used.






2. Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes, for foil tube cartridges six full strokes, and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour.


Installation in solid masonry (without sleeve)





3. Holes to be drilled perpendicular to the surface of the base material by using a hard metal tipped hammer drill bit. Drill a hole, with drill method according to Annex C4 – C39, into the base material, with nominal drill hole diameter and bore hole depth acc. to the size and embedment depth required by the selected anchor. In case of aborted drill hole the drill, hole shall be filled with mortar.




4. Blow out from the bottom of the drill hole two times. Attach the appropriate sized brush ($> d_{b,min}$ Table B2 or B3) to a drilling machine or a battery screwdriver, brush the hole clean two times, and finally blow out the hole again two times.




5. Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. Observe the gel-/working times given in Table B4.




6. The position of the embedment depth shall be marked on the threaded rod. Push the threaded rod into the drill hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. The anchor shall be free of dirt, grease, oil, or other foreign material.



7. Be sure that the annular gap is fully filled with mortar. If no excess mortar is visible at the top of the hole, the application must be renewed.



8. Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend Table B4).



9. After full curing, the fixture can be installed with up to the max. torque (see parameters of brick Annex C4 to Annex C38) by using a calibrated torque wrench.

VJ Technology Injection System for masonry E410+, EC410+


Intended use

Installation instruction Solid masonry and Autoclaved Aerated Concrete




Annex B7

Installation instructions (continuation)


Installation in solid and hollow masonry (with sleeve)




3. Holes to be drilled perpendicular to the surface of the base material by using a hard metal tipped hammer drill bit. Drill a hole, with drill method according to Annex C4 – C39, into the base material, with nominal drill hole diameter and drill hole depth acc. to the size and embedment depth required by the selected anchor. In case of aborted drill hole the drill, hole shall be filled with mortar.




4. Blow out from the bottom of the drill hole two times. Attach the appropriate sized brush ($> d_{b,min}$ Table B2 or B3) to a drilling machine or a battery screwdriver, brush the hole clean two times, and finally blow out the hole again two times.




5. Insert the sleeve flush with the surface of the masonry. Only use sleeves that have the right length. Never cut the sleeve except the sleeve 16x130/330. For installing the sleeve 16x130/330 measure the required length of sleeve, cut the sleeve from the top and set the cap on it before pushing it through the fixing element.




6. Starting from the bottom or back fill the sleeve with adhesive. For quantity of mortar attend cartridges label or installation instructions. Observe the gel-/working times given in Table B4.



7. The position of the embedment depth shall be marked on the threaded rod. Push the threaded rod into the drill hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. The anchor shall be free of dirt, grease, oil, or other foreign material.



8. Allow the adhesive to cure to the specified curing time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend Table B4).



9. After full curing, the fixture can be installed with up to the max. torque (see parameters of brick Annex C4 to Annex C38) by using a calibrated torque wrench.

VJ Technology Injection System for masonry E410+, EC410+

Intended use
Installation instructions (hollow brick) and Solid lightweight Concrete

Annex B8

Table C1: β -factors for job-site testing under tension loading

Brick-Nr.	Installation & Use category	Anchor size	β -factor	
			T _a : 24°C / 40°C	T _b : 50°C / 80°C
1-3	d/d	M8	0.82	0.70
		M10		
		M12	0.70	0.60
		M16		
	w/w	M8	0.82	0.70
		M10	0.63	0.54
		M12	0.48	0.41
		M16		
4-18	d/d w/d w/w	For all anchor	0.72	0.50

VJ Technology Injection System for masonry E410+, EC410+

Performances
 β -factors for job site testing under tension load

Annex C1

Table C2: Characteristic tension, shear resistance and bending moment of threaded rod

Size			M8	M10	M12	M16
Characteristic tension resistance						
steel, property class 4.6	$N_{Rk,s}$	[kN]	15	23	34	63
	γ_{Ms1}	[-]	2.0			
steel, property class 4.8	$N_{Rk,s}$	[kN]	15	23	34	63
	γ_{Ms1}	[-]	1.5			
steel, property class 5.6	$N_{Rk,s}$	[kN]	18	29	42	79
	γ_{Ms1}	[-]	2.0			
steel, property class 5.8	$N_{Rk,s}$	[kN]	18	29	42	79
	γ_{Ms1}	[-]	1.5			
steel, property class 8.8	$N_{Rk,s}$	[kN]	29	46	67	126
	γ_{Ms1}	[-]	1.5			
Stainless steel A4 / HCR, property class 70	$N_{Rk,s}$	[kN]	26	41	59	110
	γ_{Ms1}	[-]	1.87			
Stainless steel A4 / HCR, property class 80	$N_{Rk,s}$	[kN]	29	46	67	126
	γ_{Ms1}	[-]	1.6			
Characteristic shear resistance						
steel, property class 4.6	$V_{Rk,s}$	[kN]	7	12	17	31
	γ_{Ms1}	[-]	1.67			
steel, property class 4.8	$V_{Rk,s}$	[kN]	7	12	17	31
	γ_{Ms1}	[-]	1.25			
steel, property class 5.6	$V_{Rk,s}$	[kN]	9	15	21	39
	γ_{Ms1}	[-]	1.67			
steel, property class 5.8	$V_{Rk,s}$	[kN]	9	15	21	39
	γ_{Ms1}	[-]	1.25			
steel, property class 8.8	$V_{Rk,s}$	[kN]	15	23	34	63
	γ_{Ms1}	[-]	1.25			
Stainless steel A4 / HCR, property class 70	$V_{Rk,s}$	[kN]	13	20	30	55
	γ_{Ms1}	[-]	1.56			
Stainless steel A4 / HCR, property class 80	$V_{Rk,s}$	[kN]	15	23	34	63
	γ_{Ms1}	[-]	1.33			
Characteristic bending moment						
steel, property class 4.6	$M_{Rk,s}$	[Nm]	15	30	52	133
	γ_{Ms1}	[-]	1.67			
steel, property class 4.8	$M_{Rk,s}$	[Nm]	15	30	52	133
	γ_{Ms1}	[-]	1.25			
steel, property class 5.6	$M_{Rk,s}$	[Nm]	19	37	65	166
	γ_{Ms1}	[-]	1.67			
steel, property class 5.8	$M_{Rk,s}$	[Nm]	19	37	65	166
	γ_{Ms1}	[-]	1.25			
steel, property class 8.8	$M_{Rk,s}$	[Nm]	30	60	105	266
	γ_{Ms1}	[-]	1.25			
Stainless steel A4 / HCR, property class 70	$M_{Rk,s}$	[Nm]	26	52	92	232
	γ_{Ms1}	[-]	1.56			
Stainless steel A4 / HCR, property class 80	$M_{Rk,s}$	[Nm]	30	60	105	266
	γ_{Ms1}	[-]	1.33			


¹⁾ In absence of national regulations

VJ Technology Injection System for masonry E410+, EC410+

Performances
Characteristic tension, shear resistance and bending moment of threaded rod

Annex C2

Spacing and edge distances

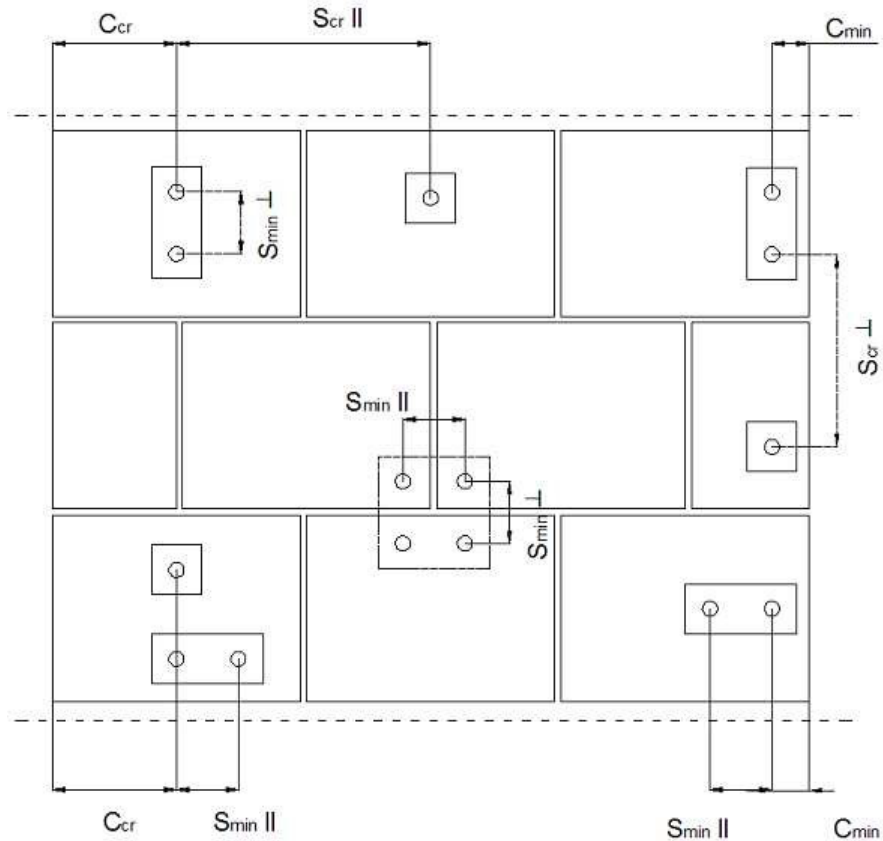

C_{cr} = Characteristic edge distance $s_{cr ||}$ = Characteristic spacing parallel to the bed joint
 $s_{cr \perp}$ = Characteristic spacing perpendicular to the bed joint C_{min} = Minimum edge distance
 $s_{min ||}$ = Minimum spacing parallel to the bed joint
 $s_{min \perp}$ = Minimum spacing perpendicular to the bed joint

VJ Technology Injection System for masonry E410+, EC410+

Performances
Edge distance and anchor spacing

Annex C3

Brick type: Autoclaved Aerated Concrete AAC2

Table C6: Characteristic values of resistance under tension and shear loads

Anchor size	Effective anchorage depth	Characteristic resistance				
		Use category				
		d/d		w/d w/w		d/d w/d w/w
		40°C / 24°C	80°C / 50°C	40°C / 24°C	80°C / 50°C	For all temperature range
		hef	NRk 1)	NRk 1)	NRk 1)	NRk 1)
[mm]	[kN]					
Compressive strength $f_b \geq 2 \text{ N/mm}^2$						
M8	80	0.9	0.9	0.9	0.9	1.5
M10	90	0.9	0.9	0.9	0.75	2.0
M12	100	1.5	1.5	1.2	0.9	2.5
M16	100	1.5	1.5	1.2	0.9	3.5

1) For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

2) For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance Autoclaved Aerated Concrete – AAC2
Characteristic values of resistance under tension and shear load

Annex C5

Brick type: Autoclaved Aerated Concrete AAC4

Table C7: Description


Brick type	Autoclaved Aerated Concrete AAC4	
Bulk density [kg/dm ³]	0.50	
Compressive strength [N/mm ²]	4	
Code	EN 771-4	
Producer (country code)	e.g., Ytong (CZ)	
Brick dimensions [mm]	499 x 375 x 249	
Drilling method	Rotary drilling	

Table C8: Installation parameter (Edge and spacing distances)

Anchor size	Effective anchorage depth	Edge distance	Spacing	Maximum installation torque
	h_{ef}	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$	$T_{inst,max}$
	[mm]			[Nm]
M8	80	120	240	2
M10	90	135	270	
M12	100	150	300	
M16	100	150	300	

Table C9: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.23	0.47	V_{Rk}	1.23	1.84
90		0.58	1.17		0.87	1.31
100	$1,4 \cdot \gamma_M$	0.10	0.21	$1,4 \cdot \gamma_M$	1.29	1.94

VJ Technology Injection System for masonry E410+, EC410+

Performance Autoclaved Aerated Concrete – AAC4
Brick description, drawing, Installation parameters, Displacement

Annex C6

Brick type: Autoclaved Aerated Concrete AAC4

Table C10: Characteristic values of resistance under tension and shear loads

Anchor size	Effective anchorage depth	Characteristic resistance				
		Use category				
		d/d		w/d w/w		d/d w/d w/w
		40°C / 24°C	80°C / 50°C	40°C / 24°C	80°C / 50°C	For all temperature range
		hef	NRk 1)	NRk 1)	NRk 1)	NRk 1)
[mm]	[kN]					
Compressive strength $f_b \geq 4 \text{ N/mm}^2$						
M8	80	0.9	0.9	0.9	0.9	1.5
M10	90	2.5	2.0	1.5	1.5	2.0
M12	100	2.5	2.0	2.0	1.5	2.5
M16	100	3.5	3.0	2.0	2.0	3.5

³⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

⁴⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance Autoclaved Aerated Concrete – AAC4
Characteristic values of resistance under tension and shear load

Annex C7

Brick type: Autoclaved Aerated Concrete AAC6

Table C11: Description

Brick type	Autoclaved Aerated Concrete AAC6
Bulk density [kg/dm ³]	0.60
Compressive strength [N/mm ²]	6
Code	EN 771-4
Producer (country code)	e.g., Porit (DE)
Brick dimensions [mm]	499 x 240 x 249
Drilling method	Rotary drilling

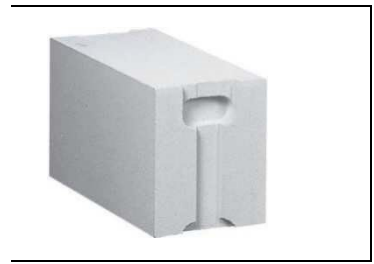


Table C12: Installation parameter (Edge and spacing distances)

Anchor size	Effective anchorage depth	Edge distance	Spacing
	h_{ef}	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$
	[mm]		
M8	80	120	240
M10	90	135	270
M12	100	150	300
M16	100	150	300

Maximum installation torque
$T_{inst,max}$
[Nm]
2

Table C13: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V
[mm]	[kN]	[mm]	[mm]	[kN]
80	N_{Rk}	0.54	1.09	V_{Rk}
90		0.85	1.69	
100	$1,4 \cdot \gamma_M$	0.10	0.19	$1,4 \cdot \gamma_M$

δ_{v0}	$\delta_{v\infty}$
[mm]	[mm]
0.32	0.48
1.49	2.23
1.67	2.50

VJ Technology Injection System for masonry E410+, EC410+

Performance Autoclaved Aerated Concrete – AAC6
Brick description, drawing,
Installation parameters, Displacements

Annex C8

Brick type: Autoclaved Aerated Concrete AAC6

Table C14: Characteristic values of resistance under tension and shear loads

Anchor size	Effective anchorage depth	Characteristic resistance				
		Use category				
		d/d		w/d w/w		d/d w/d w/w
		40°C / 24°C	80°C / 50°C	40°C / 24°C	80°C / 50°C	For all temperature range
		$N_{Rk 1)}$	$N_{Rk 1)}$	$N_{Rk 1)}$	$N_{Rk 1)}$	$V_{Rk,b2)}$
h_{ef}	[kN]					
[mm]	[kN]					
Compressive strength $f_b \geq 6 \text{ N/mm}^2$						
M8	80	2.0	2.0	2.0	2.0	5.5
M10	90	3.0	2.5	2.5	2.0	9.0
M12	100	4.5	3.5	3.0	2.5	9.0
M16	100	5.5	4.5	3.5	3.0	11.0

⁵⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

⁶⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance Autoclaved Aerated Concrete – AAC6
Characteristic values of resistance under tension and shear load

Annex C9

Brick type: Calcium silicate solid brick KS-NF

Table C15: Description


Brick type	Calcium silicate solid brick KS-NF	
Bulk density [kg/dm ³]	2.0	
Compressive strength [N/mm ²]	10, 20 or 27	
Code	EN 771-2	
Producer (country code)	e.g. Wemding (DE)	
Brick dimensions [mm]	240 x 115 x 71	
Drilling method	Hammer drilling	

Table C16: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
		h_{ef}	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$	$T_{inst,max}$
		[mm]			[Nm]
M8	-	80	120	240	10
M10	-	90	135	270	20
M12 / M16	-	100	150	300	
M8	SH 12x80	80	120	240	
	SH 16x85	85	127	255	
M10	SH 16x85	85	127	255	20
M8 / M10	SH 16x130	130	195	390	
	SH 16x130/330	130	195	390	
M12 / M16	SH 20x85	85	127	255	
	SH 20x130	130	195	390	
	SH 20x200	200	300	600	

Table C17: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{v0}	$\delta_{v\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.08	0.16	V_{Rk}	3.07	4.61
85		0.26	0.52		1.46	2.19
90		0.09	0.18		1.50	2.25
100	$1,4 \cdot \gamma_M$	0.10	0.20	$1,4 \cdot \gamma_M$	1.03	1.53
130 ; 200		0.22	0.44		1.16	1.74

VJ Technology Injection System for masonry E410+, EC410+

Performance Calcium solid brick KS-NF
Brick description, drawing, Installation parameters, Displacements

Annex C10

Brick type: Calcium silicate solid brick KS-NF

Table C18: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth h_{ef} [mm]	Characteristic resistance		
			Use category d/d;		
			40°C / 24°C	80°C / 50°C	For all temperature
			N_{Rk1}	N_{Rk1}	$V_{Rk,b2}$
Compressive strength $f_b \geq 10 \text{ N/mm}^2$					
M8	-	80	3.0	2.0	3.0
M10	-	90	3.0	2.0	3.0
M12	-	100	4.0	2.5	3.5
M16	-	100	3.0	2.0	3.5
M8	SH 12x80	80	2.5	2.0	2.5
	SH 16x85	85	2.5	2.0	3.0
	SH16x130 / SH16x130/330	130	4.0	2.5	4.0
M10	SH 16x85	85	2.5	2.0	3.0
	SH16x130/330	130	4.5	3.0	4.0
M12 / M16	SH 20x85	85	2.5	2.0	3.0
	SH 20x130 / SH 20x200	130 / 200	4.5	2.5	4.0
Compressive strength $f_b \geq 20 \text{ N/mm}^2$					
M8	-	80	4.5	3.0	4.5
M10	-	90	4.5	3.0	4.5
M12	-	100	5.5	3.5	5.0
M16	-	100	4.5	3.0	5.0
M8	SH 12x80	80	4.0	2.5	4.0
	SH 16x85	85	4.0	2.5	4.5
	SH16x130 / SH16x130/330	130	6.0	3.5	5.5
M10	SH 16x85	85	4.0	2.5	4.5
	SH 16x130/330	130	6.0	4.0	5.5
M12 / M16	SH 20x85	85	4.0	2.5	5.0
	SH 20x130 / SH 20x200	130 / 200	6.0	4.0	5.5
Compressive strength $f_b \geq 27 \text{ N/mm}^2$					
M8	-	80	5.5	3.5	5.0
M10	-	90	5.5	3.5	5.5
M12	-	100	6.5	4.5	6.0
M16	-	100	5.5	3.5	6.0
M8	SH 12x80	80	4.5	3.0	4.5
	SH 16x85	85	4.5	3.0	5.5
	SH16x130 / SH16x130/330	130	6.5	4.5	6.5
M10	SH 16x85	85	4.5	3.0	5.5
	SH 16x130/330	130	6.5	4.5	6.5
M12 / M16	SH 20x85	85	4.5	3.0	5.5
	SH 20x130 / SH 20x200	130 / 200	6.5	4.5	6.5


¹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

²⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+	Annex C11
Performance Calcium solid brick KS-NF Characteristic values of resistance under tension and shear load	

Brick type: Calcium silicate hollow brick KS L-3DF

Table C19: Description

Brick type	Calcium silicate hollow brick KS L-3DF	
Bulk density [kg/dm ³]	1.4	
Compressive strength [N/mm ²]	8, 12 or 14	
Code	EN 771-2	
Producer (country code)	e.g. Wemding (DE)	
Brick dimensions [mm]	240 x 175 x 113	
Drilling method	Rotary drilling	

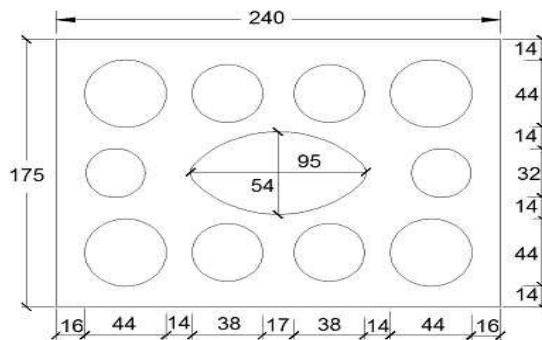


Table C20: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth h_{ef}	Edge distance	Spacing		Maximum installation torque $T_{inst,max}$ [Nm]
			$C_{min} = C_{cr}$	$S_{cr} = S_{min,II}$	$S_{min, \perp}$	
			[mm]			
M8	SH 12x80	80	100	240	113	8
M8 / M10	SH 16x85	85				
	SH 16x130	130				
	SH 16x130/330	130				
M12 / M16	SH 20x85	85	120	240	113	8
	SH 20x130	130				
	SH 20x200	200				

Table C21: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.36	0.73	V_{Rk}	0.82	1.23
85	$1,4 \cdot \gamma_M$	1.62	3.24	$1,4 \cdot \gamma_M$	1.83	2.75
130; 200		1.70	3.40		1.98	2.98

VJ Technology Injection System for masonry E410+, EC410+

Performance Calcium hollow brick KS L-3DF
Brick description, drawing, Installation parameters, Displacements

Annex C12

Brick type: Calcium silicate hollow brick KS L-3DF

Table C22: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature
			hef	N _{Rk 1)}	N _{Rk1)}
		[mm]	[kN]		
Compressive strength $f_b \geq 8 \text{ N/mm}^2$					
M8	SH 12x80	80	1.5	0.9	2.0
	SH 16x85	85	1.5	0.9	2.5
	SH 16x130	130	2.5	1.5	3.0
	SH 16x130/330	130	2.5	1.5	3.0
M10	SH 16x85	85	1.5	0.9	2.5
	SH 16x130	130	2.5	1.5	3.0
	SH 16x130/330	130	2.5	1.5	3.0
M12	SH 20x85	85	1.5	0.9	3.0
	SH 20x130 / SH	130 / 200	2.5	1.5	3.0
M16	SH 20x85	85	1.5	0.9	3.0
	SH 20x130 / SH	130 / 200	2.5	1.5	4.0
Compressive strength $f_b \geq 12 \text{ N/mm}^2$					
M8	SH 12x80	80	2.0	1.2	2.5
	SH 16x85	85	2.0	1.2	3.5
	SH 16x130	130	3.5	2.0	4.5
	SH 16x130/330	130	3.5	2.0	4.5
M10	SH 16x85	85	2.0	1.2	3.5
	SH 16x130	130	3.5	2.0	4.5
	SH 16x130/330	130	3.5	2.0	4.5
M12	SH 20x85	85	2.0	1.2	3.5
	SH 20x130 / SH	130 / 200	3.5	2.0	4.5
M16	SH 20x85	85	2.0	1.2	3.5
	SH 20x130 / SH	130 / 200	3.5	2.0	5.0
Compressive strength $f_b \geq 14 \text{ N/mm}^2$					
M8	SH 12x80	80	2.5	1.5	3.0
	SH 16x85	85	2.5	1.5	4.0
	SH 16x130	130	4.0	3.0	5.0
	SH 16x130/330	130	4.0	3.0	5.0
M10	SH 16x85	85	2.5	1.5	4.0
	SH 16x130	130	4.0	3.0	5.0
	SH 16x130/330	130	4.0	3.0	5.0
M12	SH 20x85	85	2.5	1.5	4.5
	SH 20x130 / SH	130 / 200	4.0	3.0	5.0
M16	SH 20x85	85	2.5	1.5	4.5
	SH 20x130 / SH	130 / 200	4.0	3.0	6.0

¹⁾ For design according to EOTA TR 054; N_{Rk} = N_{Rk,p} = N_{Rk,b}; N_{Rk,s} according to Table C2 Annex C2; Calculation N_{Rk,pb} see EOTA TR 054

²⁾ For V_{Rk,s} see Annex C 2, Table C2; Calculation of V_{Rk,pb} and V_{Rk,c} see EOTA TR 054


VJ Technology Injection System for masonry E410+, EC410+

Performance Calcium hollow brick KS L-3DF
Characteristic values of resistance under tension and shear load

Annex C13

Brick type: Calcium silicate hollow brick KS L-12DF

Table C23: Description

Brick type	Calcium silicate hollow brick KS L 12DF	
Bulk density [kg/dm ³]	1.40	
Compressive strength [N/mm ²]	10, 12 or 16	
Code	EN 771-2	
Producer (country code)	e.g. Wemding (DE)	
Brick dimensions [mm]	498 x 175 x 238	
Drilling method	Rotary drilling	

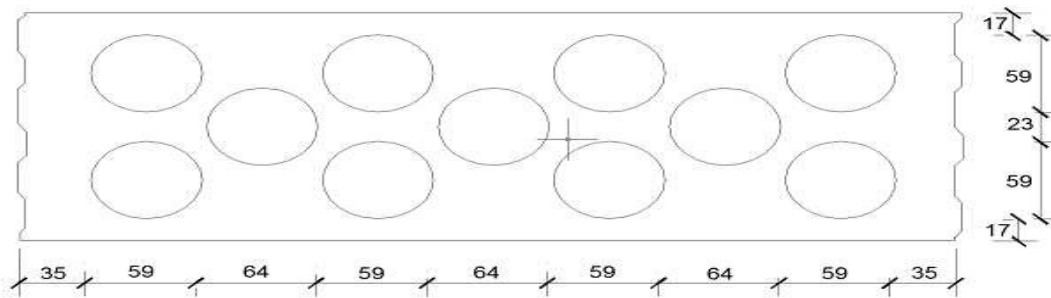


Table C24: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque	
				h_{ef}	$c_{min} = c_{cr}$		$s_{cr} = s_{min \parallel}$
				[mm]			[Nm]
M8	SH 12x80	80	100	498	238	2	
M8 / M10	SH 16x85	85				4	
	SH 16x130	130					
M12 / M16	SH 16x130/330	130	120	498	238	4	
	SH 20x85	85					
	SH 20x130	130					

Table C25: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.21	0.42	V_{Rk}	1.77	2.66
85		0.13	0.26		3.89	5.83
130	$1,4 \cdot \gamma_M$	0.22	0.44	$1,4 \cdot \gamma_M$	4.35	6.52

VJ Technology Injection System for masonry E410+, EC410+

Performance Calcium hollow brick KS L-12DF
Brick description, drawing, Installation parameters, Displacement

Annex C14

Brick type: Calcium silicate hollow brick KS L-12DF

Table C26: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			hef [mm]	N _{Rk 1)}	N _{Rk1)}
Compressive strength $f_b \geq 10 \text{ N/mm}^2$					
M8	SH 12x80	80	0.4	0.3	3.0
	SH 16x85	85	1.2	0.9	6.0
	SH 16x130	130	3.5	2.5	7.0
	SH 16x130/330	130	3.5	2.5	7.0
M10	SH 16x85	85	1.2	0.9	6.0
	SH 16x130	130	3.5	2.5	7.0
	SH 16x130/330	130	3.5	2.5	7.0
M12 / M16	SH 20x85	85	1.2	0.9	6.0
	SH 20x130 / SH 20x200	130 / 200	3.5	2.5	7.0
Compressive strength $f_b \geq 12 \text{ N/mm}^2$					
M8	SH 12x80	80	0.4	0.3	3.5
	SH 16x85	85	1.5	0.9	7.0
	SH 16x130	130	4.5	3.0	8.0
	SH 16x130/330	130	4.5	3.0	8.0
M10	SH 16x85	85	1.5	0.9	7.0
	SH 16x130	130	4.5	3.0	8.0
	SH 16x130/330	130	4.5	3.0	8.0
M12 / M16	SH 20x85	85	1.5	0.9	7.0
	SH 20x130 / SH 20x200	130 / 200	4.5	3.0	8.0
Compressive strength $f_b \geq 16 \text{ N/mm}^2$					
M8	SH 12x80	80	0.5	0.4	4.0
	SH 16x85	85	2.0	1.2	9.0
	SH 16x130	130	5.5	3.5	10.0
	SH 16x130/330	130	5.5	3.5	10.0
M10	SH 16x85	85	2.0	1.2	9.0
	SH 16x130	130	5.5	3.5	10.0
	SH 16x130/330	130	5.5	3.5	10.0
M12 / M16	SH 20x85	85	2.0	1.2	8.5
	SH 20x130 / SH 20x200	130 / 200	5.5	3.5	10.0

⁷⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

⁸⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+	Annex C15
Performance Calcium hollow brick KS L-12DF Characteristic values of resistance under tension and shear load	

Brick type: Clay solid brick Mz-DF

Table C27: Description


Brick type	Clay solid brick Mz-DF	
Bulk density [kg/dm ³]	1.64	
Compressive strength [N/mm ²]	10, 20 or 28	
Code	EN 771-1	
Producer (country code)	e.g. Unipor (DE)	
Brick dimensions [mm]	240 x 115 x 55	
Drilling method	Hammer drilling	

Table C28: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
			$c_{min} = c_{cr}$	$s_{cr} = s_{min II} = s_{min \perp}$	
		h_{ef}	[mm]		$T_{inst,max}$
					[Nm]
M8	-	80	120	240	6
	SH 12x80	80	120	240	
	SH 16x85	85	127	255	
M10	-	90	135	270	10
M12 / M16	-	100	150	300	
M10	SH 16x85	85	127	255	8
	SH 16x130	130	195	390	
	SH 16x130/330	130	195	390	
M12 / M16	SH 20x85	85	127	255	
	SH 20x130	130	195	390	
	SH 20x200	200	300	600	

Table C29: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.12	0.24	V_{Rk}	2.27	3.41
85		0.13	0.26		1.22	1.83
90		0.06	0.13		0.71	1.06
100	$1,4 \cdot \gamma_M$	0.18	0.35	$1,4 \cdot \gamma_M$	0.43	0.64
130 ; 200		0.42	0.85		1.22	1.83

VJ Technology Injection System for masonry E410+, EC410+

Performance Clay solid brick Mz-DF
Brick description, drawing, Installation parameters, Displacements

Annex C16

Brick type: Clay solid brick Mz-DF

Table C30: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth [mm]	Characteristic resistance		
			Use category d/d; w/d; w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			N_{Rk1}	N_{Rk1}	$V_{Rk,b2}$
Compressive strength $f_b \geq 10 \text{ N/mm}^2$					
M8	-	80	1.5	1.2	3.0
M10	-	90	1.5	1.2	3.5
M12	-	100	1.5	0.9	5.0
M16	-	100	2.5	1.5	5.0
M8	SH 12x80	80	2.0	1.5	3.0
	SH 16x85	85	2.0	1.5	3.0
	SH 16x130 / SH 16x130/330	130	3.0	2.0	3.0
M10	SH 16x85	85	2.0	1.5	3.5
	SH 16x130 / SH 16x130/330	130	3.0	2.0	3.5
M12 / M16	SH 20x85	85	2.0	1.5	3.5
	SH 20x130 / SH 20x200	130 / 200	3.0	2.0	3.5
Compressive strength $f_b \geq 20 \text{ N/mm}^2$					
M8	-	80	2.5	1.5	4.5
M10	-	90	2.5	1.5	5.5
M12	-	100	2.0	1.5	7.5
M16	-	100	3.5	2.5	7.5
M8	SH 12x80	80	3.0	2.0	4.0
	SH 16x85	85	3.0	2.0	4.5
	SH 16x130 / SH 16x130/330	130	4.0	2.5	4.5
M10	SH 16x85	85	3.0	2.0	5.0
	SH 16x130 / SH 16x130/330	130	4.5	3.0	5.0
M12 / M16	SH 20x85	85	3.0	2.0	5.0
	SH 20x130 / SH 20x200	130 / 200	4.5	3.0	5.0
Compressive strength $f_b \geq 28 \text{ N/mm}^2$					
M8	-	80	3.0	2.0	5.5
M10	-	90	3.0	2.0	6.5
M12	-	100	2.5	1.5	9.0
M16	-	100	4.5	3.0	9.0
M8	SH 12x80	80	3.5	2.5	5.0
	SH 16x85	85	3.5	2.5	5.0
	SH 16x130 / SH 16x130/330	130	5.0	3.5	5.0
M10	SH 16x85	85	3.5	2.5	6.0
	SH 16x130 / SH 16x130/330	130	5.0	3.5	6.0
M12 / M16	SH 20x85	85	3.5	2.5	6.0
	SH 20x130 / SH 20x200	130 / 200	5.0	3.5	6.0


⁹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}; N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

¹⁰⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+	Annex C17
Performance Clay solid brick Mz-DF Characteristic values of resistance under tension and shear load	

Brick type: Clay hollow brick HLz-16DF

Table C31: Description

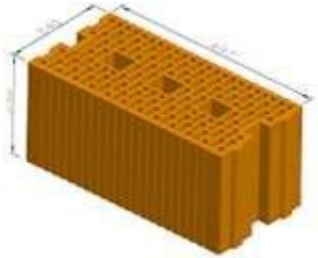Brick type	Clay hollow brick HLz-16DF	
Bulk density [kg/dm ³]	0.83	
Compressive strength [N/mm ²]	6, 9, 12 or 14	
Code	EN 771-1	
Producer (country code)	e.g. Unipor (DE)	
Brick dimensions [mm]	497 x 238 x 240	
Drilling method	Rotary drilling	

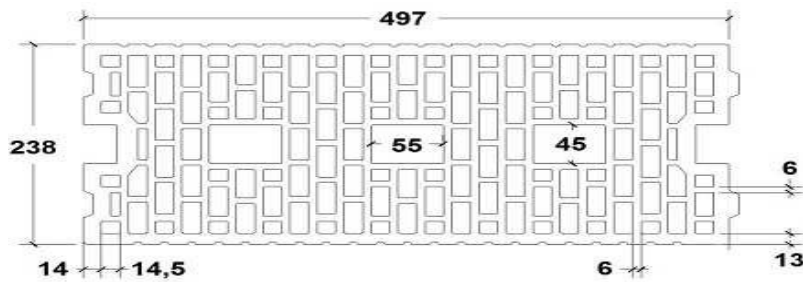


Table C32: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque		
				$C_{min} = C_{cr}$	$S_{cr} = S_{min \parallel}$		$S_{min \perp}$	$T_{inst,max}$
				[mm]			[Nm]	
M8	SH 12x80	80	100	497	238	6		
M8 / M10	SH 16x85	85						
	SH 16x130	130						
	SH 16x130/330	130						
M12 / M16	SH 20x85	85	120	497	238	6		
	SH 20x130	130						
	SH 20x200	200						

Table C33: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.27	0.55	V_{Rk}	1.02	1.53
85		0.55	1.10		2.14	3.22
130; 200	$1,4 \cdot \gamma_M$	0.19	0.38	$1,4 \cdot \gamma_M$	2.26	3.39

VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick HLz-16DF
Brick description, drawing, Installation parameters, Displacements

Annex C18

Brick type: Clay hollow brick HLz-16DF

Table C34: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d; w/d; w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			hef	N _{Rk1})	N _{Rk1})
[mm]	[kN]				
Compressive strength $f_b \geq 6 \text{ N/mm}^2$					
M8	SH 12x80	80	1.2	0.75	2.5
	SH 16x85	85	1.5	1.2	4.0
	SH 16x130	130	2.5	1.5	4.0
	SH 16x130/330	130	2.5	1.5	4.0
M10	SH 16x85	85	1.5	1.2	4.0
	SH 16x130	130	2.5	1.5	6.0
	SH 16x130/330	130	2.5	1.5	6.0
M12 / M16	SH 20x85	85	2.0	1.5	4.0
	SH 20x130 / SH 20x200	130/ 200	2.5	1.5	6.0
Compressive strength $f_b \geq 9 \text{ N/mm}^2$					
M8	SH 12x80	80	1.2	0.9	3.0
	SH 16x85	85	2.0	1.5	4.5
	SH 16x130	130	3.0	2.0	5.0
	SH 16x130/330	130	3.0	2.0	5.0
M10	SH 16x85	85	2.0	1.5	5.0
	SH 16x130	130	3.0	2.0	7.0
	SH 16x130/330	130	3.0	2.0	7.0
M12 / M16	SH 20x85	85	2.5	2.0	5.0
	SH 20x130 / SH 20x200	130/ 200	3.0	2.0	7.0
Compressive strength $f_b \geq 12 \text{ N/mm}^2$					
M8	SH 12x80	80	1.5	1.2	3.5
	SH 16x85	85	2.5	1.5	5.5
	SH 16x130	130	3.5	2.5	6.0
	SH 16x130/330	130	3.5	2.5	6.0
M10	SH 16x85	85	2.5	1.5	6.0
	SH 16x130	130	3.5	2.5	8.0
	SH 16x130/330	130	3.5	2.5	8.0
M12 / M16	SH 20x85	85	3.5	2.0	6.0
	SH 20x130 / SH 20x200	130/ 200	3.5	2.5	8.0
Compressive strength $f_b \geq 14 \text{ N/mm}^2$					
M8	SH 12x80	80	1.5	1.2	4.0
	SH 16x85	85	2.5	2.0	6.0
	SH 16x130	130	3.5	2.5	6.5
	SH 16x130/330	130	3.5	2.5	6.5
M10	SH 16x85	85	2.5	2.0	6.0
	SH 16x130	130	3.5	2.5	9.0
	SH 16x130/330	130	3.5	2.5	9.0
M12 / M16	SH 20x85	85	3.5	2.0	6.0
	SH 20x130 / SH 20x200	130/ 200	3.5	2.5	9.0

¹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

²⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054


VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick HLz-16DF
Characteristic values of resistance under tension and shear load

Annex C19

Brick type: Clay hollow brick Porotherm Homebric

Table C35: Description

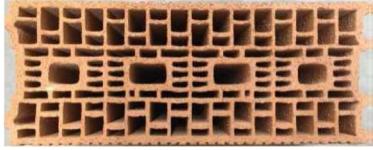Brick type	Clay hollow brick Porotherm Homebric	
Bulk density [kg/dm ³]	0.68	
Compressive strength [N/mm ²]	6, 8 or 10	
Code	EN 771-1	
Producer (country code)	e.g. Wienerberger (FR)	
Brick dimensions [mm]	500 x 200 x 299	
Drilling method	Rotary drilling	

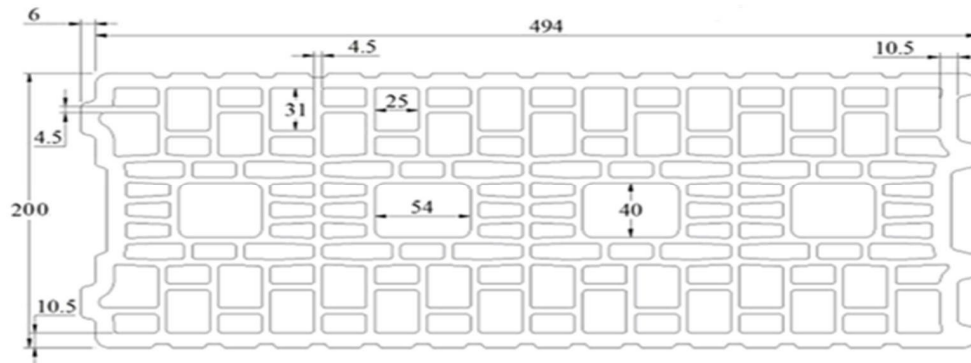


Table C36: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
				$C_{min} = C_{cr}$	$S_{cr} = S_{min \parallel}$	
		h_{ef}	[mm]			[Nm]
M8	SH 12x80	80	100	500	299	2
M8 / M10	SH 16x85	85				6
	SH 16x130	130				
	SH 16x130/330	130				
M12 / M16	SH 20x85	85	120			
	SH 20x130	130				

Table C37: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.65	1.29	V_{Rk}	1.26	1.89
85		0.52	1.04		1.89	2.84
130	$1,4 \cdot \gamma_M$	0.45	0.90	$1,4 \cdot \gamma_M$	1.48	2.23

VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Porotherm Homebric
Brick description, drawing, Installation parameters, Displacements

Annex C20

Brick type: Clay hollow brick Porotherm Homebric

Table C38: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			N_{Rk1}	N_{Rk1}	$V_{Rk,b2}$
		hef	[kN]		
		[mm]			
Compressive strength $f_b \geq 6 \text{ N/mm}^2$					
M8	SH 12x80	80	0.9	0.75	2.0
	SH 16x85	85	1.2	0.75	2.0
	SH 16x130	130	1.5	0.9	2.5
	SH 16x130/330	130	1.5	0.9	2.5
M10	SH 16x85	85	1.2	0.75	2.0
	SH 16x130	130	1.5	0.9	2.5
	SH 16x130/330	130	1.5	0.9	2.5
M12	SH 20x85	85	1.2	0.75	3.0
	SH 20x130	130	1.5	0.9	3.0
M16	SH 20x85	85	1.2	0.75	3.0
	SH 20x130	130	1.5	0.9	3.0
Compressive strength $f_b \geq 8 \text{ N/mm}^2$					
M8	SH 12x80	80	1.2	0.9	2.5
	SH 16x85	85	1.2	0.9	2.5
	SH 16x130	130	1.5	1.2	3.0
	SH 16x130/330	130	1.5	1.2	3.0
M10	SH 16x85	85	1.2	0.9	2.5
	SH 16x130	130	1.5	1.2	3.0
	SH 16x130/330	130	1.5	1.2	3.0
M12	SH 20x85	85	1.2	0.9	3.5
	SH 20x130	130	1.5	1.2	3.5
M16	SH 20x85	85	1.2	0.9	3.5
	SH 20x130	130	1.5	1.2	3.5
Compressive strength $f_b \geq 10 \text{ N/mm}^2$					
M8	SH 12x80	80	1.2	0.9	3.0
	SH 16x85	85	1.5	0.9	3.0
	SH 16x130	130	2.0	1.2	3.5
	SH 16x130/330	130	2.0	1.2	3.5
M10	SH 16x85	85	1.5	0.9	3.0
	SH 16x130	130	2.0	1.2	3.5
	SH 16x130/330	130	2.0	1.2	3.5
M12	SH 20x85	85	1.5	0.9	4.0
	SH 20x130	130	2.0	1.2	4.0
M16	SH 20x85	85	1.5	0.9	4.0
	SH 20x130	130	2.0	1.2	4.0

¹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

²⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054


VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Porotherm Homebric
Characteristic values of resistance under tension and shear load

Annex C21

Brick type: Clay hollow brick BGV Thermo

Table C39: Description

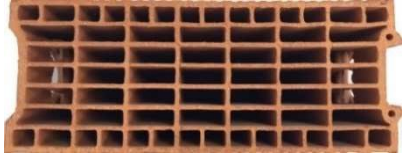Brick type	Clay hollow brick BGV Thermo	
Bulk density [kg/dm³]	0.62	
Compressive strength [N/mm²]	4, 6 or 10	
Code	EN 771-1	
Producer (country code)	e.g. Leroux (FR)	
Brick dimensions [mm]	500 x 200 x 314	
Drilling method	Rotary drilling	

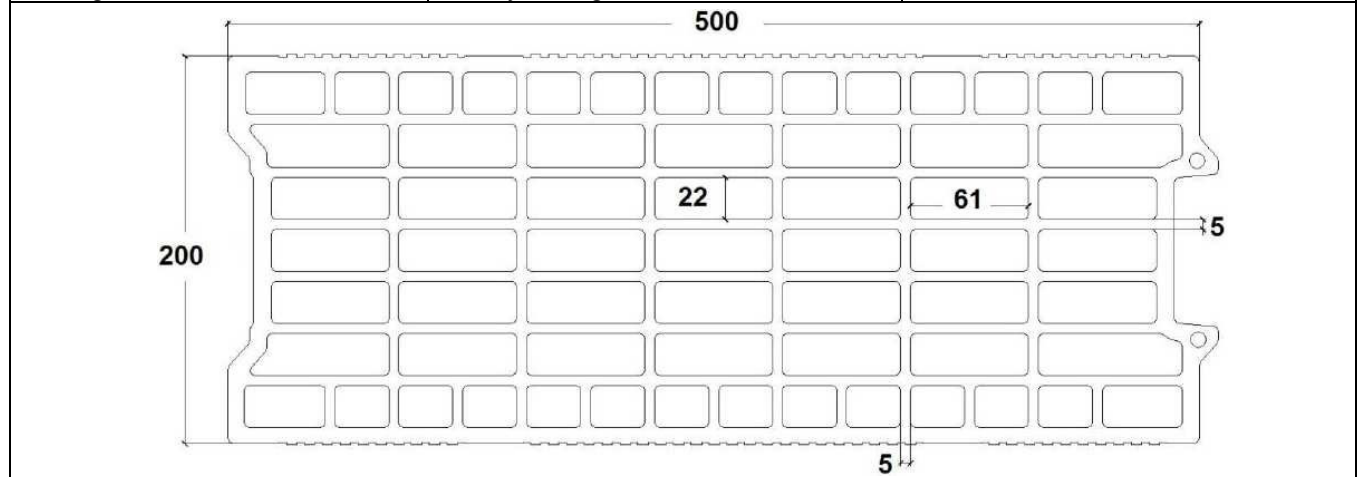


Table C40: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		h_{ef}	$c_{min} =$	$s_{cr} = s_{min \parallel}$	$s_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
M8	SH 12x80	80	100	500	314	2
M8 / M10	SH 16x85	85				
	SH 16x130	130				
M12 / M16	SH 16x130/330	130	120	500	314	4
	SH 20x85	85				
	SH 20x130	130				

Table C41: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.27	0.54	V_{Rk}	1.21	1.81
85		0.39	0.77		2.00	3.01
130	$1,4 \cdot \gamma_M$	0.16	0.32	$1,4 \cdot \gamma_M$	1.60	2.39

VJ Technology Injection System for masonry E410+, EC410+	Annex C22
Performance Clay hollow brick BGV Thermo Brick description, drawing, Installation parameters, Displacements	

Brick type: Clay hollow brick BGV Thermo

Table C42: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth h_{ef} [mm]	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			$N_{Rk1)}$	$N_{Rk1)}$	$V_{Rk,b2)}$
[kN]					
Compressive strength $f_b \geq 4 \text{ N/mm}^2$					
M8	SH 12x80	80	0.5	0.4	2.0
	SH 16x85	85	0.75	0.5	2.0
	SH 16x130	130	0.9	0.75	2.5
	SH 16x130/330	130	0.9	0.75	2.5
M10	SH 16x85	85	0.75	0.5	2.0
	SH 16x130	130	1.2	0.75	2.5
	SH 16x130/330	130	1.2	0.75	2.5
M12	SH 20x85	85	0.75	0.5	2.0
	SH 20x130	130	1.2	0.75	2.5
M16	SH 20x85	85	0.9	0.6	2.0
	SH 20x130	130	1.2	0.75	2.5
Compressive strength $f_b \geq 6 \text{ N/mm}^2$					
M8	SH 12x80	80	0.6	0.5	2.0
	SH 16x85	85	0.9	0.6	2.5
	SH 16x130	130	1.2	0.9	3.0
	SH 16x130/330	130	1.2	0.9	3.0
M10	SH 16x85	85	0.9	0.6	2.5
	SH 16x130	130	1.5	0.9	3.0
	SH 16x130/330	130	1.5	0.9	3.0
M12	SH 20x85	85	0.9	0.6	3.0
	SH 20x130	130	1.5	0.9	3.0
M16	SH 20x85	85	1.2	0.75	3.0
	SH 20x130	130	1.5	0.9	3.0
Compressive strength $f_b \geq 10 \text{ N/mm}^2$					
M8	SH 12x80	80	0.9	0.6	3.0
	SH 16x85	85	1.2	0.9	3.5
	SH 16x130	130	1.5	1.2	4.0
	SH 16x130/330	130	1.5	1.2	4.0
M10	SH 16x85	85	1.2	0.9	3.5
	SH 16x130	130	1.5	1.2	4.0
	SH 16x130/330	130	1.5	1.2	4.0
M12	SH 20x85	85	1.2	0.75	3.5
	SH 20x130	130	1.5	1.2	4.0
M16	SH 20x85	85	1.5	0.9	3.5
	SH 20x130	130	1.5	1.2	4.0

1) For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

2) For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054


VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick BGV Thermo
Characteristic values of resistance under tension and shear load

Annex C23

Brick type: Clay hollow brick Calibric Th

Table C43: Description

Brick type	Clay hollow brick Calibric Th	
Bulk density [kg/dm ³]	0.62	
Compressive strength [N/mm ²]	6, 9 or 12	
Code	EN 771-1	
Producer (country code)	e.g. Terreal (FR)	
Brick dimensions [mm]	500 x 200 x 314	
Drilling method	Rotary drilling	

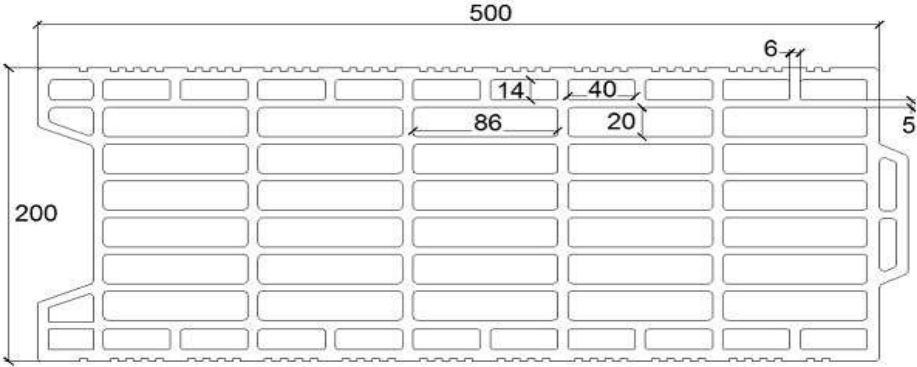


Table C44: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		h_{ef}	$C_{min} \equiv$	$S_{cr} = S_{min \parallel}$	$S_{min \perp}$	$T_{inst,max}$
[mm]						[Nm]
M8	SH 12x80	80	100	500	314	2
M8 / M10	SH 16x85	85				
	SH 16x130	130				
M12 / M16	SH 16x130/330	130	120	500	314	2
	SH 20x85	85				
	SH 20x130	130				

Table C45: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0.48	0.96	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1.18	1.78
85		0.49	0.98		2.20	3.30
130		0.37	0.74		2.31	3.46

VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Calibric Th
Brick description, drawing, Installation parameters, Displacements

Annex C24

Brick type: Clay hollow brick Calibric Th

Table C46: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth h_{ef} [mm]	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			N_{Rk1}	N_{Rk1}	$V_{Rk,b2}$
[kN]					
Compressive strength $f_b \geq 6 \text{ N/mm}^2$					
M8	SH 12x80	80	0.75	0.5	2.5
	SH 16x85	85	0.75	0.5	3.5
	SH 16x130	130	0.9	0.6	3.5
	SH 16x130/330	130	0.9	0.6	3.5
M10	SH 16x85	85	0.75	0.5	3.5
	SH 16x130	130	0.9	0.6	3.5
	SH 16x130/330	130	0.9	0.6	3.5
M12	SH 20x85	85	0.75	0.5	6.0
	SH 20x130	130	0.9	0.6	6.0
M16	SH 20x85	85	1.2	0.75	6.0
	SH 20x130	130	1.2	0.75	6.0
Compressive strength $f_b \geq 9 \text{ N/mm}^2$					
M8	SH 12x80	80	0.9	0.6	3.5
	SH 16x85	85	0.9	0.6	4.5
	SH 16x130	130	1.2	0.75	4.5
	SH 16x130/330	130	1.2	0.75	4.5
M10	SH 16x85	85	0.9	0.6	4.5
	SH 16x130	130	1.2	0.9	4.5
	SH 16x130/330	130	1.2	0.9	4.5
M12	SH 20x85	85	0.9	0.6	7.5
	SH 20x130	130	1.2	0.9	7.5
M16	SH 20x85	85	1.5	0.9	7.5
	SH 20x130	130	1.5	0.9	7.5
Compressive strength $f_b \geq 12 \text{ N/mm}^2$					
M8	SH 12x80	80	0.9	0.75	4.0
	SH 16x85	85	0.9	0.75	5.5
	SH 16x130	130	1.2	0.9	5.5
	SH 16x130/330	130	1.2	0.9	5.5
M10	SH 16x85	85	0.9	0.75	5.5
	SH 16x130	130	1.5	0.9	5.5
	SH 16x130/330	130	1.5	0.9	5.5
M12	SH 20x85	85	0.9	0.75	8.5
	SH 20x130	130	1.5	0.9	8.5
M16	SH 20x85	85	1.5	1.2	8.5
	SH 20x130	130	1.5	1.2	8.5

¹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

²⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054


VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Calibric Th
Characteristic values of resistance under tension and shear load

Annex C25

Brick type: Clay hollow brick Urbanbric

Table C47: Description

Brick type	Clay hollow brick Urbanbric	
Bulk density [kg/dm ³]	0.74	
Compressive strength [N/mm ²]	6 or 9	
Code	EN 771-1	
Producer (country code)	e.g., Imerys (FR)	
Brick dimensions [mm]	560 x 200 x 274	
Drilling method	Rotary drilling	

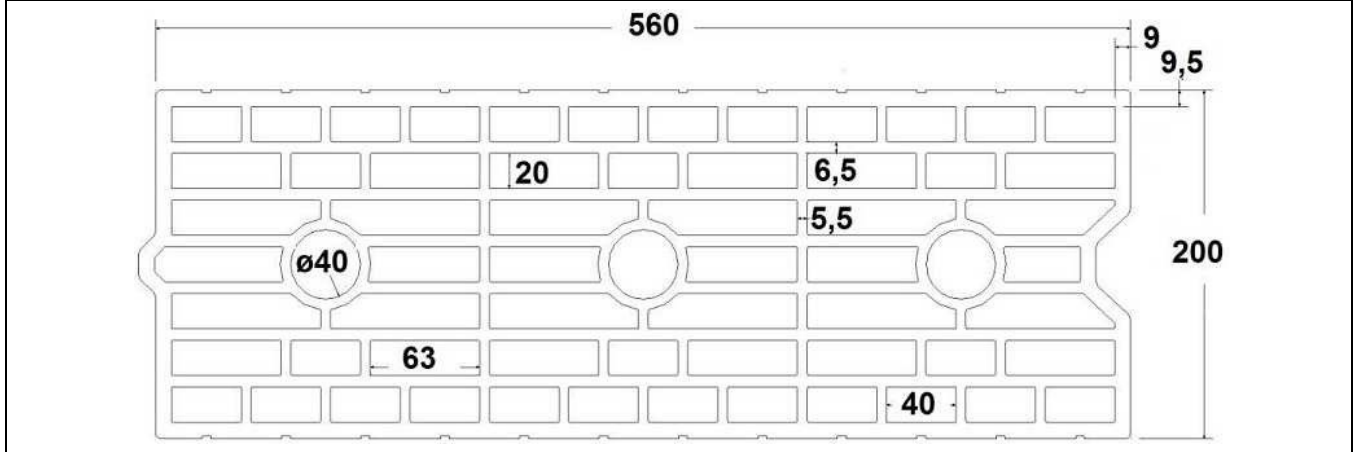


Table C48: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		h_{ef}	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel}$	$s_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
M8	SH 12x80	80	100	560	274	2
M8 / M10	SH 16x85	85				
	SH 16x130	130				
	SH 16x130/330	130				
M12 / M16	SH 20x85	85	120	560	274	2
	SH 20x130	130				

Table C49: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.34	0.67	V_{Rk}	0.71	1.06
85		0.52	1.04		1.37	2.06
130	$1,4 \cdot \gamma_M$	0.62	1.24	$1,4 \cdot \gamma_M$	1.62	2.44

VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Calibric Th
Brick description, drawing, Installation parameters, Displacement

Annex C26

Brick type: Clay hollow brick Urbanbric

Table C50: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category		
			d/d	w/d	w/w
			40°C / 24°C	80°C / 50°C	For all temperature range
h_{ef}	$N_{Rk1)}$	$N_{Rk1)}$	$V_{Rk,b2)}$		
[mm]	[kN]				
Compressive strength $f_b \geq 6 \text{ N/mm}^2$					
M8	SH 12x80	80	0.9	0.75	3.0
M8 / M10	SH 16x85	85	1.2	0.75	3.5
	SH 16x130	130	1.5	1.2	3.5
	SH 16x130/330	130	1.5	1.2	3.5
M12 / M16	SH 20x85	85	1.2	0.75	4.0
	SH 20x130	130	1.5	1.2	4.0
Compressive strength $f_b \geq 9 \text{ N/mm}^2$					
M8	SH 12x80	80	1.2	0.9	3.5
M8 / M10	SH 16x85	85	1.5	0.9	4.0
	SH 16x130	130	2.0	1.5	4.5
	SH 16x130/330	130	2.0	1.5	4.5
M12 / M16	SH 20x85	85	1.5	0.9	5.0
	SH 20x130	130	2.0	1.5	5.0

¹¹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

¹²⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Calibric Th
Characteristic values of resistance under tension and shear load

Annex C27

Brick type: Clay hollow brick Blocchi Leggeri

Table C51: Description

Brick type	Clay hollow brick Blocchi
Bulk density [kg/dm ³]	0.55
Compressive strength [N/mm ²]	4, 6 or 8
Code	EN 771-1
Producer (country code)	e.g., Wienerberger (IT)
Brick dimensions [mm]	250 x 120 x 250
Drilling method	Rotary drilling

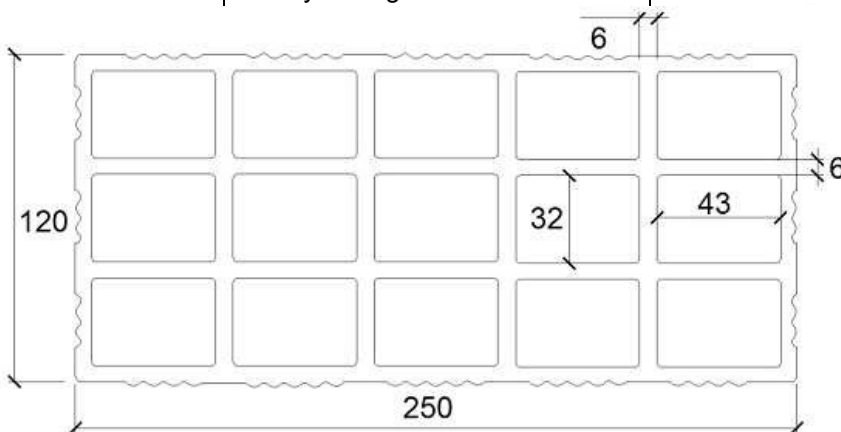


Table C52: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth h_{ef}	Edge distance	Spacing		Maximum installation torque $T_{inst,max}$ [Nm]
			$C_{min} = C_{cr}$	$S_{cr} = S_{min}$	$S_{min} \perp$	
		[mm]				
M8	SH 12x80	80	100	250	250	4
M8 / M10	SH 16x85	85				
	SH 16x130	130				
	SH 16x130/330	130				
M12 / M16	SH 20x85	85	120	250	250	4
	SH 20x130	130				
	SH 20x200	200				

Table C53: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0.32	0.64	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	1.16	1.74
85		0.26	0.53		2.52	3.78
130; 200		0.32	0.64		2.52	3.78

**VJ Technology Injection System for masonry
E410+, EC410+**

Performance Clay hollow brick Blocchi Leggeri
Brick description, drawing,
Installation parameters, Displacements

Annex C28

Brick type: Clay hollow brick Blocchi Leggeri

Table C54: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth hef [mm]	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			N _{Rk 1)}	N _{Rk1)}	V _{Rk,b2)}
[kN]					
Compressive strength $f_b \geq 4 \text{ N/mm}^2$					
M8	SH 12x80	80	0.4	0.3	2.0
M8 / M10	SH 16x85	85	0.4	0.3	2.0
	SH 16x130	130	0.5	0.3	2.0
	SH 16x130/330	130	0.5	0.3	2.0
M12 / M16	SH 20x85	85	0.4	0.3	2.0
	SH 20x130	130	0.5	0.3	2.0
	SH 20x200	200	0.5	0.3	2.0
Compressive strength $f_b \geq 6 \text{ N/mm}^2$					
M8	SH 12x80	80	0.5	0.3	2.0
M8 / M10	SH 16x85	85	0.5	0.3	2.0
	SH 16x130	130	0.6	0.4	2.0
	SH 16x130/330	130	0.6	0.4	2.0
M12 / M16	SH 20x85	85	0.5	0.3	2.5
	SH 20x130	130	0.6	0.4	2.5
	SH 20x200	200	0.6	0.4	2.5
Compressive strength $f_b \geq 8 \text{ N/mm}^2$					
M8	SH 12x80	80	0.6	0.4	2.5
M8 / M10	SH 16x85	85	0.6	0.4	2.5
	SH 16x130	130	0.6	0.5	2.5
	SH 16x130/330	130	0.6	0.5	2.5
M12 / M16	SH 20x85	85	0.6	0.4	3.0
	SH 20x130	130	0.6	0.5	3.0
	SH 20x200	200	0.6	0.5	3.0

¹³⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

¹⁴⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054


VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Blocchi Leggeri
Characteristic values of resistance under tension and shear load

Annex C29

Brick type: Clay hollow brick Doppio Uni

Table C55: Description

Brick type	Clay hollow brick Doppio Uni	
Bulk density [kg/dm ³]	0.92	
Compressive strength [N/mm ²]	10, 16, 20 or 28	
Code	EN 771-1	
Producer (country code)	e.g., Wienerberger (IT)	
Brick dimensions [mm]	250 x 120 x 120	
Drilling method	Rotary drilling	

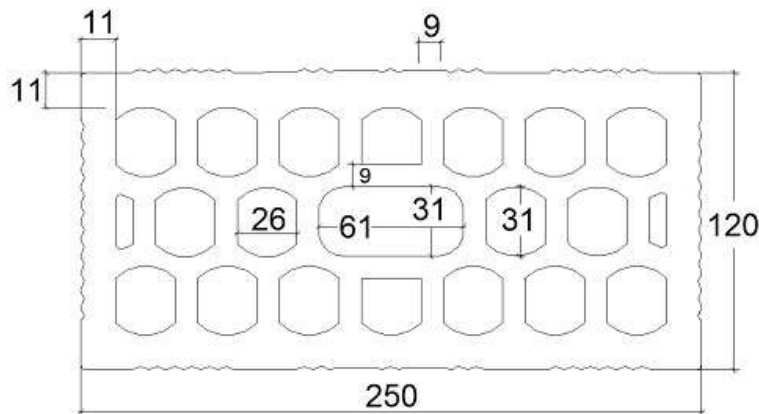


Table C56: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		h_{ef}	$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel}$	$s_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
M8	SH 12x80	80	100	250	120	4
M8 / M10	SH 16x85	85				
	SH 16x130	130				
M12 / M16	SH 16x130/330	130	120	250	120	4
	SH 20x85	85				
	SH 20x130	130				
	SH 20x200	200				

Table C57: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.54	1.08	V_{Rk}	1.63	2.45
85	$1,4 \cdot \gamma_M$	0.17	0.34	$1,4 \cdot \gamma_M$	1.75	2.63
130 ; 200		0.54	1.08		1.75	2.63

VJ Technology Injection System for masonry E410+, EC410+

Performance Clay hollow brick Doppio Uni
Brick description, drawing, Installation parameters, Displacements

Annex C30

Brick type: Clay hollow brick Doppio Uni

Table C58: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth h_{ef} [mm]	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			N_{Rk1}	N_{Rk1}	$V_{Rk,b2}$
[kN]					
Compressive strength $f_b \geq 10 \text{ N/mm}^2$					
M8	SH 12x80	80	0.9	0.6	2.0
M8 / M10	SH 16x85	85	0.9	0.6	2.0
	SH 16x130	130	0.9	0.6	2.0
	SH 16x130/330	130	0.9	0.6	2.0
M12 / M16	SH 20x85	85	1.2	0.75	2.0
	SH 20x130	130	1.2	0.75	2.0
	SH 20x200	200	1.2	0.75	2.0
Compressive strength $f_b \geq 16 \text{ N/mm}^2$					
M8	SH 12x80	80	0.9	0.75	2.5
M8 / M10	SH 16x85	85	1.2	0.9	2.5
	SH 16x130	130	1.2	0.9	2.5
	SH 16x130/330	130	1.2	0.9	2.5
	SH 20x85	85	1.5	0.9	2.5
M12 / M16	SH 20x130	130	1.5	0.9	2.5
	SH 20x200	200	1.5	0.9	2.5
	SH 20x85	85	1.5	0.9	2.5
Compressive strength $f_b \geq 20 \text{ N/mm}^2$					
M8	SH 12x80	80	1.2	0.75	3.0
M8 / M10	SH 16x85	85	1.2	0.9	3.0
	SH 16x130	130	1.5	0.9	3.0
	SH 16x130/330	130	1.5	0.9	3.0
	SH 20x85	85	1.5	0.9	3.0
M12 / M16	SH 20x130	130	1.5	0.9	3.0
	SH 20x200	200	1.5	0.9	3.0
	SH 20x85	85	1.5	0.9	3.0
Compressive strength $f_b \geq 28 \text{ N/mm}^2$					
M8	SH 12x80	80	1.5	0.9	3.5
M8 / M10	SH 16x85	85	1.5	1.2	3.5
	SH 16x130	130	1.5	1.2	3.5
	SH 16x130/330	130	1.5	1.2	3.5
	SH 20x85	85	2.0	1.2	3.5
M12 / M16	SH 20x130	130	2.0	1.2	3.5
	SH 20x200	200	2.0	1.2	3.5
	SH 20x85	85	2.0	1.2	3.5


¹⁵⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

¹⁶⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+	Annex C31
Performance Clay hollow brick Doppio Uni Characteristic values of resistance under tension and shear load	

Brick type: Hollow Light weight concrete Bloc creux B40 Table

C59: Description

Brick type	Hollow light weight concrete Bloc creux B40	
Bulk density [kg/dm ³]	0.8	
Compressive strength [N/mm ²]	4	
Code	EN 771-3	
Producer (country code)	e.g., Sepa (FR)	
Brick dimensions [mm]	494 x 200 x 190	
Drilling method	Rotary drilling	

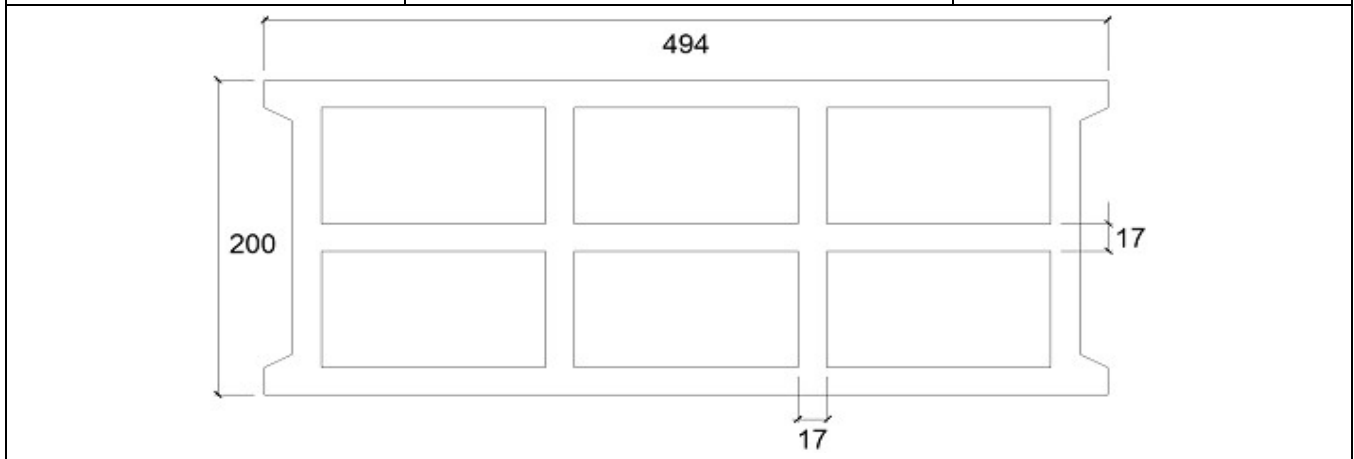


Table C60: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		h_{ef}	$C_{min} = C_{cr}$	$S_{cr} = S_{min \parallel}$	$S_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
M8	SH 12x80	80	100	494	190	2
M8 / M10	SH 16x85	85				
	SH 16x130	130				
M12 / M16	SH 20x85	85	120	494	190	2
	SH 20x130	130				

Table C61: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0.14	0.29	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0.25	0.37
85		0.45	0.90		0.98	1.47
130		0.61	1.22		1.10	1.65

VJ Technology Injection System for masonry E410+, EC410+

Performance hollow light weight concrete Bloc creux B40 Brick description, drawing, Installation parameters, Displacements

Annex C32

Brick type: Hollow Light weight concrete Bloc creux B40

Table C62: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			$N_{Rk1)}$	$N_{Rk1)}$	$V_{Rk,b2)}$
	h_{ef}		[kN]		
	[mm]		[kN]		
Compressive strength $f_b \geq 4 \text{ N/mm}^2$					
M8	SH 12x80	80	0.4	0.3	1.2
	SH 16x85	85	0.6	0.5	3.0
	SH 16x130	130	2.0	1.5	3.5
	SH 16x130/330	130	2.0	1.5	3.5
M10	SH 16x85	85	0.6	0.5	3.0
	SH 16x130	130	2.0	1.5	3.5
	SH 16x130/330	130	2.0	1.5	3.5
M12	SH 20x85	85	0.9	0.6	3.0
	SH 20x130	130	2.0	1.5	3.5
M16	SH 20x85	85	0.9	0.6	3.0
	SH 20x130	130	2.0	1.5	3.5

¹⁷⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

¹⁸⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance hollow light weight concrete Bloc creux B40
Characteristic values of resistance under tension and shear load

Annex C33

Brick type: Solid light weight concrete brick

Table C63: Description


Brick type	Solid light weight concrete brick	
Bulk density [kg/dm ³]	0.63	
Compressive strength [N/mm ²]	2	
Code	EN 771-3	
Producer (country code)	e.g., Bisotherm (DE)	
Brick dimensions [mm]	300 x 123 x 248	
Drilling method	Rotary drilling	

Table C64: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
			$c_{min} = c_{cr}$	$s_{cr} = s_{min \parallel} = s_{min \perp}$	$T_{inst,max}$
		h_{ef}	[mm]		[Nm]
M8	-	80	120	240	6
M10	-	90	135	270	
M12	-	100	150	300	10
M16	-	100	150	300	14

Table C65: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.64	1.28	V_{Rk}	0.50	0.75
90		0.70	1.41		0.68	1.03
100	$1,4 \cdot \gamma_M$	0.21	0.42	$1,4 \cdot \gamma_M$	0.54	0.81

VJ Technology Injection System for masonry E410+, EC410+

Performance Solid light weight concrete LAC
Brick description, drawing, Installation parameters, Displacements

Annex C34

Brick type: Solid light weight concrete brick

Table C66: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			$N_{Rk\ 1)}$	$N_{Rk1)}$	$V_{Rk,b2)}$
		h_{ef}	[kN]		
		[mm]			
Compressive strength $f_b \geq 2\text{ N/mm}^2$					
M8	-	80	2.0	1.5	3.0
M10	-	90	2.0	1.5	3.5
M12	-	100	2.0	1.5	4.0
M16	-	100	2.0	1.5	4.0

¹⁹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054


²⁰⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance Solid light weight concrete LAC
Characteristic values of resistance under tension and shear load

Annex C35

Brick type: Hollow light weight concrete brick – Leca Lex harkko RUH-200 Table C67: Description

Brick type	Hollow light weight concrete Leca Lex harkko RUH-200	
Bulk density [kg/dm ³]	0.7	
Compressive strength [N/mm ²]	2.7	
Code	EN 771-3	
Producer (country code)	e.g., Saint-Gobain Weber (Fin)	
Brick dimensions [mm]	498 x 200 x 195	
Drilling method	Rotary drilling	

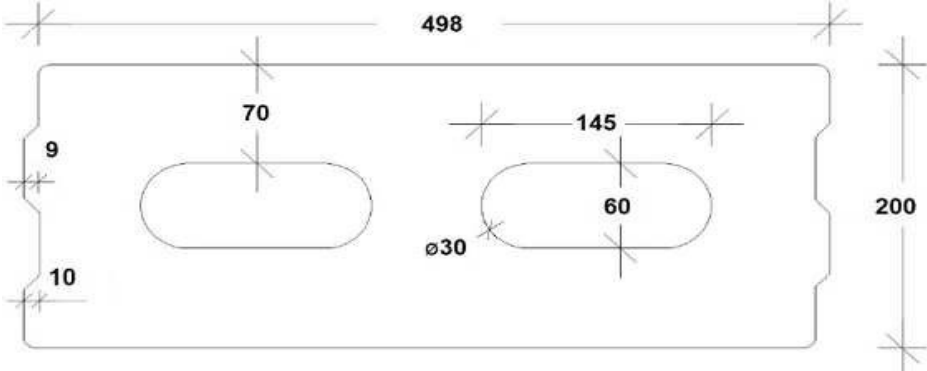


Table C68: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing		Maximum installation torque
		h_{ef}	$c_{min} = c_{cr}$	$s_{cr} = s_{min II}$	$s_{min \perp}$	$T_{inst,max}$
				[mm]		[Nm]
M8	SH 12x80	80	120	498	195	8
M8 / M10	SH 16x85	85	127			
	SH 16x130	130	195			
	SH 16x130/330	130	195			
M12 / M16	SH 20x85	85	127			
	SH 20x130	130	195			

Table C69: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	$\frac{N_{Rk}}{1,4 \cdot \gamma_M}$	0.11	0.22	$\frac{V_{Rk}}{1,4 \cdot \gamma_M}$	0.47	0.70
85		0.11	0.23		0.38	0.57
130		0.10	0.20		0.56	0.85

VJ Technology Injection System for masonry E410+, EC410+

Performance LECA LEX harkko RUH-200 Hollow
Brick description, drawing, Installation parameters, Displacements

Annex C36

Brick type: Hollow light weight concrete brick – Leca Lex harkko RUH-200

Table C70: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			$N_{Rk1)}$	$N_{Rk1)}$	$V_{Rk,b2)}$
	h_{ef}	[kN]			
	[mm]				
Compressive strength $f_b \geq 2,7 \text{ N/mm}^2$					
M8	SH 12x80	80	2.0	1.2	2.5
	SH 16x85	85	2.0	1.2	3.5
	SH 16x130	130	2.5	1.5	3.5
	SH 16x130/330	130	2.5	1.5	3.5
M10	SH 16x85	85	2.0	1.5	3.5
	SH 16x130	130	2.5	1.5	3.5
	SH 16x130/330	130	2.5	1.5	3.5
M12	SH 20x85	85	2.5	1.5	3.5
	SH 20x130	130	2.5	1.5	3.5
M16	SH 20x85	85	2.5	1.5	3.5
	SH 20x130	130	2.5	1.5	3.5

²¹⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

²²⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance LECA LEX harkko RUH-200 Hollow
Characteristic values of resistance under tension and shear load
Displacement

Annex C37

Brick type: Solid light weight concrete brick – Leca Lex harkko RUH-200 kulma Table C71: Description


Brick type	Solid light weight concrete Leca Lex harkko RUH-200 kulma	
Bulk density [kg/dm ³]	0.78	
Compressive strength [N/mm ²]	3	
Code	EN 771-3	
Producer (country code)	e.g., Saint-Gobain Weber (Fin)	
Brick dimensions [mm]	498 x 200 x 195	
Drilling method	Rotary drilling	

Table C72: Installation parameter (Edge and spacing distances)

Anchor size	Sleeve	Embedment depth	Edge distance	Spacing	Maximum installation torque
			$C_{min} = C_{cr}$	$S_{cr} = S_{min II} = S_{min \perp}$	$T_{inst,max}$
		h_{ef}	[mm]		[Nm]
M8	-	80	120	240	6
M10	-	90	135	270	12
M12	-	100	150	300	14
M16	-	100	150	300	16
M8	SH 12x80	80	120	240	8
M8 / M10	SH 16x85	85	127	255	
	SH 16x130	130	195	390	
	SH 16x130/330	130	195	390	
M12 / M16	SH 20x85	85	127	255	12
	SH 20x130	130	195	390	16

Table C73: Displacement

Effective anchorage depth h_{ef}	N	δ_{N0}	$\delta_{N\infty}$	V	δ_{V0}	$\delta_{V\infty}$
[mm]	[kN]	[mm]	[mm]	[kN]	[mm]	[mm]
80	N_{Rk}	0.09	0.18	V_{Rk}	0.48	0.72
85		0.07	0.15		0.77	1.15
90	$1,4 \cdot \gamma_M$	0.13	0.26	$1,4 \cdot \gamma_M$	0.26	0.39
100		0.13	0.23		0.36	0.54
130		0.10	0.21		0.68	1.01

VJ Technology Injection System for masonry E410+, EC410+

Performance LECA LEX harkko RUH-200 Kulma Solid
Brick description, drawing, Installation parameters, Displacements

Annex C38

Brick type: Solid light weight concrete brick – Leca Lex harkko RUH-200 kulma Table C74: Characteristic values of resistance under tension and shear loads

Anchor size	Sleeve	Effective anchorage depth	Characteristic resistance		
			Use category d/d w/d w/w		
			40°C / 24°C	80°C / 50°C	For all temperature range
			hef	N _{Rk1)}	N _{Rk1)}
[mm]	[kN]				
Compressive strength $f_b \geq 3,0 \text{ N/mm}^2$					
M8	-	80	2.0	1.2	3.0
M10	-	90	3.0	2.0	4.0
M12	-	100	3.0	2.0	4.0
M16	-	100	3.0	2.0	4.0
M8	SH 12x80	80	2.0	1.2	3.0
	SH 16x85	85	2.0	1.5	3.5
	SH 16x130	130	3.0	2.0	4.0
	SH 16x130/330	130	3.0	2.0	4.0
M10	SH 16x85	85	2.0	1.5	3.5
	SH 16x130	130	3.0	2.0	4.0
	SH 16x130/330	130	3.0	2.0	4.0
M12 / M16	SH 20x85	85	2.0	1.5	4.5
	SH 20x130	130	3.0	2.0	4.5

²³⁾ For design according to EOTA TR 054; $N_{Rk} = N_{Rk,p} = N_{Rk,b}$; $N_{Rk,s}$ according to Table C2 Annex C2; Calculation $N_{Rk,pb}$ see EOTA TR 054

²⁴⁾ For $V_{Rk,s}$ see Annex C 2, Table C2; Calculation of $V_{Rk,pb}$ and $V_{Rk,c}$ see EOTA TR 054

VJ Technology Injection System for masonry E410+, EC410+

Performance LECA LEX harkko RUH-200 Kulma Solid
Characteristic values of resistance under tension and shear load

Annex C39



British Board of Agrément,
1st Floor Building 3
Hatters Lane
Croxley Park
Watford
WD18 8YG