

DrillTech CSLSF - metal framing screws


Technical Data Sheet

Typical Applications

- Fixing steel to steel without pre-drilling.
- Ductwork and framework.
- Fastening where low profile head is required.

Product Information

Product Code	Size (mm)	Drill Point	Drilling Capacity (mm)	Head Style	Drive	Finish
13601240	4.8 x 22	2pt	0.8 - 4.0	Wafer	PH2	Silver Ruspert
13601180	5.5 x 19	2pt	0.8 - 3.5	Pancake	PH2	Silver Ruspert
13602010	5.5 x 25	3pt	1.2 - 5.0	Pancake	PH2	Green Ruspert
13601230	5.5 x 25	3pt	1.2 - 5.0	Pancake	PH2	Silver Ruspert

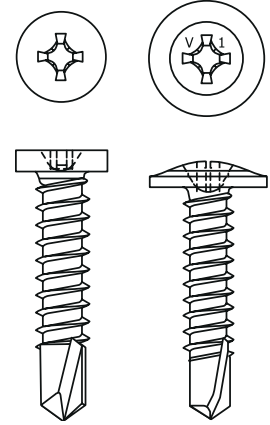

Ultimate Pullout Strength, kN

Diameter (mm)	Drill Point	Nominal Steel Thickness				
		0.7mm	1.2mm	2.0mm	3.0mm	5.0mm
4.8	2pt	0.8	1.2	2.8	4.1	-
5.5	2pt	0.8	1.4	2.5	4.8	-
5.5	3pt	-	1.3	3.0	4.8	13.5

Ultimate Shear Strength, kN

Diameter (mm)	Drill Point	Nominal Steel Thickness			
		0.7mm	1.2mm	1.5mm	5.0mm
4.8	2pt	2.3	3.6	5.3	-
5.5	2pt	2.5	4.1	10.1	-
5.5	3pt	-	3.8	-	10.6

- Pullout tests conducted by VJT Test Laboratory (UKAS Testing 7903) using in-house test method VJTTL SOP14 based on the latest CFA guidance note (method available on request).
- Pullover tests conducted following the principles of BS 5427:2016+A1:2017 (Code of practise for the use of profiled sheet for roof and wall cladding on buildings: Annex E). Tests conducted with 16mm washer fitted under screw head.
- Performance data is unfactored.

Features & Benefits

- C1022 case-hardened carbon steel
- 1000 hour silver/green ruspert finish
- Coarse thread
- Low profile head style for unobtrusive finish

Installation Tips

- For optimal install use a screwgun with depth setting nosepiece and RPM range of 1500-2200
- Avoid overdriving/overtightening
- Fastener is fully seated when head is in contact with material surface
- A minimum of 3 threads must protrude through the rear of the metal structure

All product specifications and data are subject to change without notice. The data contained in this datasheet is believed to be accurate and is reproduced in good faith. It is the customer's responsibility to ensure that the product described in this datasheet is suitable for their application.

VJ Technology disclaim any and all liability for any errors, inaccuracies or incompleteness contained in the datasheet. In addition VJ Technology makes no warranty, representation or guarantee regarding the suitability of the product described by the datasheet for any particular or associated purchase.