

TECHNICAL DATA SHEET


Decking Screws, A2 Stainless Steel, Passivated VJT Product Codes: 13550087 to 13550140

We confirm our range of Decking Screws, carbon steel, are manufactured from the following material:-

- A2 (304) Stainless Steel, passivated, offering optimum corrosion resistance

Specification as follows:-

- Square #2 Socket Drive to reduce driver wear and prevent 'camming' out
- Double countersunk head with 4 ribs to assist with self-countersinking
- Type 17 Cutting Point
- 20 - 25° sharp point for easy penetration into all wood types
- Each box of screws comes with a bagged 25mm CR-V 6150 Square Bit

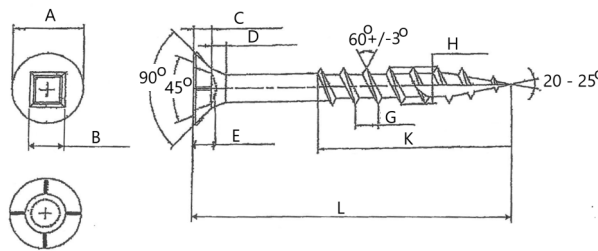

	Drawing Ref.	13550087	13550090	13550100	13550110	13550140 **
Size	-	4.2 x 63mm	4.8 x 50mm	4.8 x 63mm	4.8 x 75mm	5.2 x 60mm
Finish	-	Passivated	Passivated	Passivated	Passivated	Passivated
Weight	-	4.46g	4.80g	5.40g	6.40g	5.06g
Head Diameter	A	7.00 to 8.10mm	8.00 to 9.10mm	8.00 to 9.10mm	8.00 to 9.10mm	9.00 to 9.70mm
Drive Size	B	2.84mm Ref (Square #2)	2.84mm Ref (Square #2)	2.84mm Ref (Square #2)	2.84mm Ref (Square #2)	2.84mm Ref (Square #2)
Outer Csk Height	C	2.05mm Ref.	2.05mm Ref.	2.05mm Ref.	2.05mm Ref.	2.16mm Ref.
Inner Csk Height	D	1.80mm Ref.	1.80mm Ref.	1.80mm Ref.	1.80mm Ref.	1.80mm Ref.
Driver Depth	E	1.65 to 1.91mm	1.65 to 1.91mm	1.65 to 1.91mm	1.65 to 1.91mm	1.65 to 1.91mm
Thread Pitch	G	2.54mm	3.175mm	3.175mm	3.175mm	3.175mm
Thread Diameter	H	4.10 to 4.40mm	4.60 to 5.00mm	4.60 to 5.00mm	4.60 to 5.00mm	4.80 to 5.40mm
Thread Length (Length x 2/3)	K	42.00mm +/- 1.30mm	33.33mm +/- 1.30mm	42.00mm +/- 1.30mm	50.00mm +/- 1.50mm	40.00mm +/- 1.30mm
Total Length	L	63mm +/- 1.30mm	50mm +/- 1.30mm	63mm +/- 1.30mm	75mm +/- 1.50mm	60mm +/- 1.30mm

** 13550140 - This product has a serrated thread

This data sheet is valid until there is a significant change in the product and its characteristics.

Signed by:



Position: Commercial Manager

Name: Andy Bridge

Date: 02 August 2022