



COLLATED SELF DRILLING SCREW



FEATURES

- PH2 Recess
- Bugle head to stop paper surface being damaged
- Hardened carbon steel
- Bright zinc plated to withstand 96hours salt spray testing
- 60° self tapping thread
- Minimum torsional strength of 28kg/cm
- 1800-2500rpm
- Head diameter 8.4mm maximum
- For fixing plasterboard to steel 0.7 – 2.5mm thick


PRODUCT RANGE

Product Code	Size (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
00035COLLSD	3.5 x 35	1,000	10	10,000	320	320,000
00045COLLSD	3.5 x 45	1,000	10	10,000	240	240,000
00050COLLSD	3.5 x 50	1,000	10	10,000	240	240,000

DIMENSIONAL DATA


Product Code	D (mm)	L (mm)	d _p (mm)	DK (mm)	K (mm)
00035COLLSD	3.5	35	2.8	8.2	3.57
00045COLLSD	3.5	45	2.8	8.2	3.57
00050COLLSD	3.5	50	2.8	8.2	3.57

*all figures stated are approximate and for reference only.

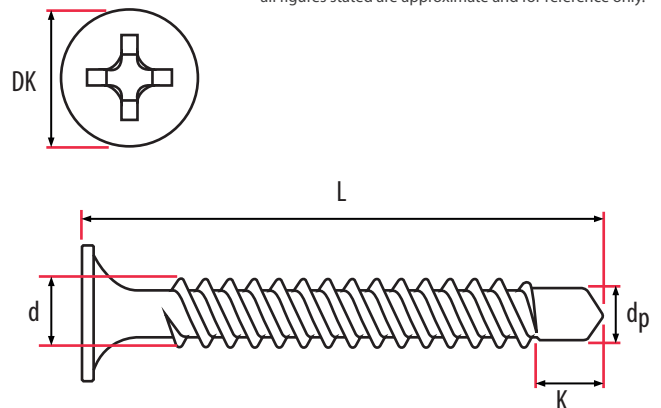

D	Diameter	d _p	Drill Point Diameter
DK	Head Diameter	K	Drill Point
L	Length		

COLLATED STRIP

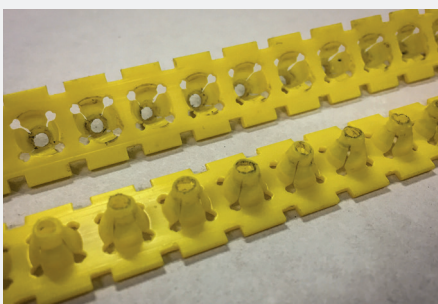

FEATURES

- Light density polyethylene (LDPE) material
- Unique yellow colour
- Tight tolerances to ensure universal compatibility
- 50 screws per strip (wide choice available)