


KESTREL

Easypost

Twin-bolt support system for wood fencing posts

BOLT-DOWN SPECIFICATION SHEET

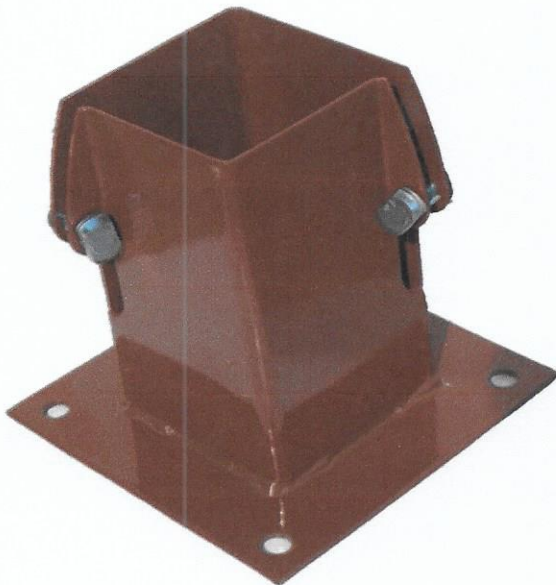

SOCKET

50mm x 50mm (48mm to 52mm posts)

75mm x 75mm (73mm to 78mm posts)

100mm x 100mm (99mm to 103mm posts)

Socket depth 150mm

Steel thickness: 2.0mm

With internal tooth to prevent lateral post movement

FASTENERS

Two x bolts/nuts

Anti-turn bolt head (for single spanner use)

Steel grade: Q235 rust-resistant

50mm x 50mm socket: M6 x 20mm

75mm x 75mm socket: M10 x 25mm

100mm x 100mm socket: M10 x 30mm

PLATE

50mm x 50mm: 2.0mm steel thickness

75mm & 7550mm & 1100mm x 100mm: 3.0mm steel thickness

FINISH

Zinc base-coated and powder-coated

Coating thickness: 35-50 µm

PACKAGING

6 pieces/cardboard carton. Carton dimensions:

50 x 50mm : 28.5cm x 30cm x 16cm

75 x 75mm : 34.5cm x 30cm x 16cm

100 x 100: 40.5cm x 30cm x 16cm

Supplied in compliance with ISO 9001:2008 and GB/T 19001-2008, certificate no. 00116Q210259R3S/1300

Owlett-Jaton, Opal Way, Stone Business Park, Stone, Staffs ST15 0SW

Telephone 01785 819819 Email: info@owlett-jaton.com Website: www.owlett-jaton.com