

Technical Data Sheet

Typical Applications

- Fixing metal sheeting and cladding to heavy steel purlins and sections.
- Fastening liner panels and general components to steel.
- Metal fastening where stainless steel product is required.

Product Information

Size (mm)	Drill Point	Drilling Capacity (mm)	Head Style	Drive	Finish
5.5 x L	5pt	5.0 - 12.0	Hex	8mm A/F	Stainless Steel (Bi-Metal)

Ultimate Pullout Resistance, kN

Diameter (mm)	Drill Point	Nominal Steel Thickness			
		5.0mm	8.0mm	10.0mm	12.0mm
5.5	5pt	12.8	12.7	12.7	12.5

Ultimate Shear Resistance, kN

Diameter (mm)	Drill Point	Nominal Steel Thickness	
		5.0mm	12.0mm
5.5	5pt	9.6	9.9

Ultimate Pullover Resistance, kN

Diameter (mm)	Drill Point	Nominal Steel Thickness		
		0.5mm	0.7mm	1.2mm
5.5	5pt	3.8	6.2	8.2

Ultimate Mechanical Tensile and Shear Capacity, kN

Diameter (mm)	Drill Point	Ultimate Tensile Strength (kN)	Ultimate Mechanical Shear Strength (kN)
5.5	3pt	11.8	18.1

Pullout tests conducted by VJT Test Laboratory (UKAS Testing 7903) using in-house test method VJTTL SOP83 based on the latest CFA guidance note (method available on request).


Pullover tests conducted following the principles of BS 5427:2016+A1:2017 (Code of practise for the use of profiled sheet for roof and wall cladding on buildings: Annex E) & EN14566. Tests conducted with 16mm washer fitted under screw head.

Ultimate mechanical tensile tests conducted generally in accordance with ISO 6892-1

Ultimate mechanical shear tests conducted generally in accordance with Mil std 1312-13

Performance data is unfactored.

All product specifications and data are subject to change without notice. The data contained in this datasheet is believed to be accurate and is reproduced in good faith. It is the customer's responsibility to ensure that the product described in this datasheet is suitable for their application. VJ Technology disclaim any and all liability for any errors, inaccuracies or incompleteness contained in the datasheet. In addition VJ Technology makes no warranty, representation or guarantee regarding the suitability of the product described by the datasheet for any particular or associated purchase.

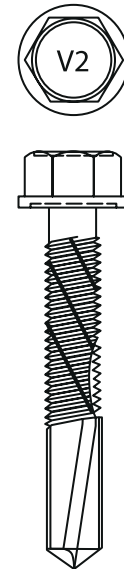

Features and Benefits

- Drills 5-12mm thick steel
- A2 (304) stainless steel with case-hardened carbon steel drill point
- Fine thread
- Available with a 16mm bonded EPDM washer

Installation Tips

- For optimal install use a screwgun with depth setting nosepiece and RPM range of 1500-2200
- Avoid overdriving/overtightening
- Fastener is fully seated when head is in contact with material surface, bonded washers should not compress >66% of original thickness
- A minimum of 3 threads must protrude through the rear of the metal structure